# ESSENTIALS VEVE™-OPTICS (02) STATIC WHITE


24VDC Linear Fixtures - Corner & Surface


410.2 & 410.16 Closet Rated up to 4.0W/ft

1-BIN 1-STEP SW/SW-HE ONLY

5 YEAR WARRANTY

BAA & BABA SW, SW-HE ONLY

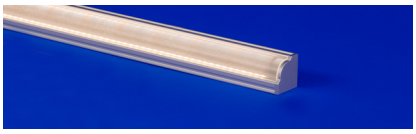




- Corner and surface mount linear fixture with optical lens
- Choose from a 20° or 45° beam angle
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Can be suitable for exterior use when specified as wet, contact factory for more information

**INFORMATION REQUIRED FOR LIGHTING SCHEDULE**

| 1 PRODUCT | 2 WATTS/ FT | 3 CCT | 4 RATED | 5 EFFICIENCY | 6 LENS |
|---|---|---|---|---|---|
| | | | | STD | |

**ADDITIONAL INFORMATION REQUIRED TO ORDER**

| 7 WIRE INPUT/ OUTPUT | 8 CONNECTOR/ WIRE IN | 9 CONNECTOR/ WIRE OUT | 10 WIRE COLOR | 11 WIRE TYPE | 12 MOUNTING | 13 FINISH | 14 LENGTH (IN) | 15 EXACT/ OPTIMAL |
|---|---|---|---|---|---|---|---|---|
| | | | | | | | | |

Sample Part Number: **VV2SW-5.0-30-DRY-STD-20-P1-BW-BW-BK-CL2-SST-BK-48"-E**

## 1 PRODUCT

**VV2SW**
**VV2SW-USA**

Select USA option for BAA and BABA projects. Only DRY or WET ratings apply.

See following pages for compatible power supplies.

## 2 WATTS/FT

| | |
|---|---|
| **1.5** | 1.5W/ft |
| **3.0** | 3.0W/ft |
| **4.0** | 4.0W/ft |
| **5.0** | 5.0W/ft |
| **1.5HE** | 1.5W/ft HE |
| **3.0HE** | 3.0W/ft HE |
| **6.0HE** | 6.0W/ft HE |
| **9.0HE** | 9.0W/ft HE |

| | |
|---|---|
| **3.0HE+** | 3.0W/ft HE+ |
| **6.0HE+** | 6.0W/ft HE+ |

| | |
|---|---|
| **1.5** | 1.5W/ft |
| **3.0** | 3.0W/ft |
| **4.0** | 4.0W/ft |
| **5.0** | 5.0W/ft |
| **1.5HE** | 1.5W/ft HE |
| **3.0HE** | 3.0W/ft HE |
| **6.0HE** | 6.0W/ft HE |

| | |
|---|---|
| **1.5** | 1.5W/ft |
| **3.0** | 3.0W/ft |
| **4.0** | 4.0W/ft |
| **5.0** | 5.0W/ft |

## 3 CCT

| | |
|---|---|
| **18** | 1800K |
| **20** | 2000K |
| **22** | 2200K |
| **24** | 2400K |
| **27** | 2700K |
| **30** | 3000K |
| **35** | 3500K |
| **40** | 4000K |

| | |
|---|---|
| **27** | 2700K |
| **30** | 3000K |
| **35** | 3500K |
| **40** | 4000K |

| | |
|---|---|
| **18** | 1800K |
| **20** | 2000K |
| **22** | 2200K |
| **24** | 2400K |
| **27** | 2700K |
| **30** | 3000K |
| **35** | 3500K |
| **40** | 4000K |

| | |
|---|---|
| **18** | 1800K |
| **20** | 2000K |
| **22** | 2200K |
| **24** | 2400K |
| **27** | 2700K |
| **30** | 3000K |
| **35** | 3500K |
| **40** | 4000K |

## 4 RATED

**DRY** IP20

**DMP** IP54

**WET** IP67

Can be suitable for exterior use, contact factory for more information

## 5 EFFICIENCY

**STD** Standard

## 6 LENS

**20** Optical 20°
**45** Optical 45° DRY or DMP only

For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages

## 7 WIRE INPUT/OUTPUT

**SINGLE (Input only)**
**S1** End Feed

**PASS THROUGH (Input/output)**
**P1** End Feed

## 8 CONNECTOR/WIRE IN

| | |
|---|---|
| **BW** | Bare Wire (Standard 24") |
| **BRL** | Barrel |
| **CON6** | Connector 6" |
| **CON24** | Connector 24" |

| | |
|---|---|
| **BW** | Bare Wire (Standard 24") |
| **BRL** | Barrel |
| **CON6** | Connector 6" |
| **CON24** | Connector 24" |

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

## 9 CONNECTOR/WIRE OUT

**CLS** Closed End (No feed)

| | |
|---|---|
| **BW** | Bare Wire (Standard 24") |
| **BRL** | Barrel |
| **CON6** | Connector 6" |
| **CON24** | Connector 24" |

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

## 10 WIRE COLOR

| | |
|---|---|
| **WH** | White |
| **BK** | Black |
| **N/A** | For Barrel |

wet barrel only available in black

## 11 WIRE TYPE

| | |
|---|---|
| **CL2** | Class 2 |
| **CL2P** | Plenum Rated |
| **N/A** | For Barrel |

CL2P only available with bare wire leads (BW)

## 12 MOUNTING

| | |
|---|---|
| **SST** | Stainless Steel |
| **M4** | Low Profile Magnet |
| **MG** | Magnet |

## 13 FINISH

| | |
|---|---|
| **ST** | Satin |
| **BK** | Black |
| **BZ** | Bronze |
| **CU** | Custom |

Custom finishes require a longer lead time, consult factory

## 14 LENGTH (IN)

Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".

## 15 EXACT/OPTIMAL

| | |
|---|---|
| **O** | Optimal Illumination |
| **E** | Exact Specified Length |

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-10-05-26


# ESSENTIALS VEVE™-OPTICS (02) STATIC WHITE

24VDC Linear Fixtures - Corner & Surface


## 1 PRODUCT - DIMENSIONS





Profile with optical lens




Profile with optical lens, stainless steel mounting clip and mounting tray




Profile with optical lens magnet mounting clip





Profile with optical lens with low profile magnet

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with VV2SW-**-30-DRY-STD

| | 1.5 W/FT | | 1.5HE W/FT | | 3.0 W/FT | | 3.0HE W/FT | | 3.0HE+W/FT | | 4.0 W/FT | | 5.0 W/FT | | 6.0HE W/FT | | 6.0HE+W/FT | | 9.0HEW/FT | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI |
| 20 | 151 | 98 | 185 | 98 | 264 | 98 | 339 | 98 | 490 | 92 | 328 | 98 | 399 | 98 | 643 | 98 | 905 | 92 | 1004 | 98 |
| 45 | 161 | 98 | 202 | 98 | 282 | 98 | 370 | 98 | 534 | 92 | 350 | 98 | 426 | 98 | 701 | 98 | 986 | 92 | 1096 | 98 |


## 6 DIODE VISIBILITY

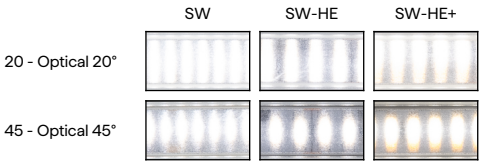


## PHOTOMETRIC PERFORMANCE


Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

**20DEG**




Optical 20°

**45DEG**




Optical 45°

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-10-05-26

# ESSENTIALS VEVE™-OPTICS (02) STATIC WHITE


24VDC Linear Fixtures - Corner & Surface

## TEMPERATURE RATINGS

| | | 1.5 W/FT | | 1.5 HE W/FT | | 3.0 W/FT | | 3.0 HE W/FT | | 3.0 HE+ W/FT | | 4.0 W/FT | | 5.0 W/FT | | 6.0 HE W/FT | | 6.0 HE+ W/FT | | 9.0 HE W/FT | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| DRY | Ambient Operating Temp - Surface | -4°F | 140°F | -4°F | 145°F | -4°F | 135°F | -4°F | 140°F | -13°F | 140°F | -4°F | 130°F | -4°F | 125°F | -4°F | 120°F | -13°F | 120°F | -4°F | 105°F |
| DMP | Ambient Operating Temp - Surface | -4°F | 140°F | -4°F | 145°F | -4°F | 135°F | -4°F | 140°F | — | — | -4°F | 130°F | -4°F | 125°F | -4°F | 120°F | — | — | — | — |
| WET | Ambient Operating Temp - Surface | -4°F | 135°F | — | — | -4°F | 130°F | — | — | — | — | -4°F | 125°F | -4°F | 120°F | — | — | — | — | — | — |


## 7 WIRE INPUT/OUTPUT

SINGLE (Input only)





End Feed

PASS THROUGH (Input/Output)





End Feed

## CONFIGURATION OPTIONS





Single End Feed





Connection by others

Non-Continuous End Feed




Connection by others


Non-Continuous Corner Feed

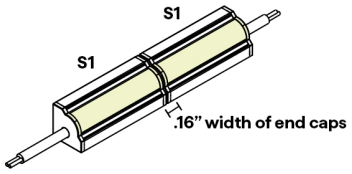



Continuous End to End Feed

## 8/9 CONNECTOR/WIRE – IN/OUT


Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out





Bare Wire 24"
22 AWG




Barrel 6" - DRY/DMP | 22 AWG





Barrel 6"- WET | 22 AWG




6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

## 10 WIRE COLOR



White

Black

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-10-05-26

# ESSENTIALS VEVE™-OPTICS (02) STATIC WHITE

24VDC Linear Fixtures - Corner & Surface

## 12 MOUNTING

**SST**





Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-01

Each clip comes with a #4 x 5/8" Flat Head SS

**M4**





Low Profile Magnet

One M4 provided per foot.

To order separately use MG-04

**MMA-04**





Magnet Mount Accessory for M4

Sold separately, to order use MMA-04

Each bracket comes with 2 #6 x 5/8 Flat Head SS

Required when mounting to a non-magnetic surface

**MG**





Magnet Clip

One MG provided per foot

To order separately use MG-01

**MMA-01**




Magnet Mount Accessory of MG-01

Sold separately, to order use MMA-01

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface

## 13 FINISH



Satin

Black

Bronze

Custom finishes require a longer lead time, consult factory


Custom finishes require a longer lead time, consult factory

## 14 EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →

E/O Explained →

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

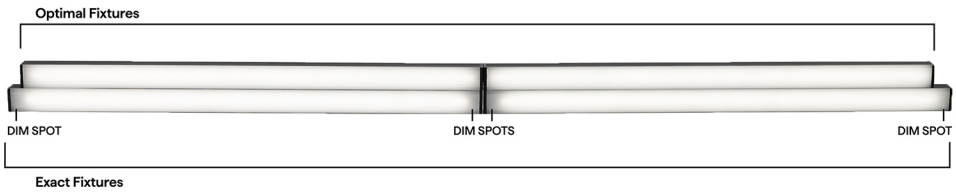



© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# ESSENTIALS VEVE™-OPTICS (02) STATIC WHITE



24VDC Linear Fixtures - Corner & Surface

## SW DRY DMP LENGTHS BY INCH

**EXACT LENGTH**


| Requested Length | Potential dim spot on either end of a S1 fixture   |
|---|---|
| 12" | 0.5" |
| 13" | 0.5" |
| 14" | 0.5" |
| 15" | 0.5" |
| 16" | 0.5" |
| 17" | 0.5" |
| 18" | 0.5" |
| 19" | 0.5" |
| 20" | 0.5" |
| 21" | 0.5" |
| 22" | 0.5" |
| 23" | 0.5" |
| 24" | 0.5" |
| 36" | 0.5" |
| 48" | 0.5" |
| 60" | 0.5" |
| 72" | 0.5" |
| 84" | 0.5" |
| 96" | 0.5" |

**OPTIMAL LENGTH**



| Requested Nominal Length | S1   | P1   |
|---|---|---|
| 12" | 11.41" | 11.66" |
| 13" | 12.41" | 12.66" |
| 14" | 13.41" | 13.66" |
| 15" | 14.41" | 14.66" |
| 16" | 15.41" | 15.66" |
| 17" | 16.41" | 16.66" |
| 18" | 17.41" | 17.66" |
| 19" | 18.41" | 18.66" |
| 20" | 19.41" | 19.66" |
| 21" | 20.41" | 20.66" |
| 22" | 21.41" | 21.66" |
| 23" | 22.41" | 22.66" |
| 24" | 23.41" | 23.66" |
| 36" | 35.41" | 35.66" |
| 48" | 47.41" | 47.66" |
| 60" | 59.41" | 59.66" |
| 72" | 71.41" | 71.66" |
| 84" | 83.41" | 83.66" |
| 96" | 95.41" | 95.66" |

## SW WET LENGTHS BY INCH

**EXACT LENGTH**

| Requested Length | Potential dim spot on either end of a S1 fixture   |
|---|---|
| 12" | 0.5" |
| 13" | 0.5" |
| 14" | 0.5" |
| 15" | 0.5" |
| 16" | 0.5" |
| 17" | 0.5" |
| 18" | 0.5" |
| 19" | 0.5" |
| 20" | 0.5" |
| 21" | 0.5" |
| 22" | 0.5" |
| 23" | 0.5" |
| 24" | 0.5" |
| 36" | 0.5" |
| 48" | 0.5" |
| 60" | 0.5" |
| 72" | 0.5" |
| 84" | 0.5" |
| 96" | 0.5" |

**OPTIMAL LENGTH**

| Requested Nominal Length | S1   | P1   |
|---|---|---|
| 12" | 11.56" | 11.71" |
| 13" | 12.56" | 12.71" |
| 14" | 13.56" | 13.71" |
| 15" | 14.56" | 14.71" |
| 16" | 15.56" | 15.71" |
| 17" | 16.56" | 16.71" |
| 18" | 17.56" | 17.71" |
| 19" | 18.56" | 18.71" |
| 20" | 19.56" | 19.71" |
| 21" | 20.56" | 20.71" |
| 22" | 21.56" | 21.71" |
| 23" | 22.56" | 22.71" |
| 24" | 23.56" | 23.71" |
| 36" | 35.56" | 35.71" |
| 48" | 47.56" | 47.71" |
| 60" | 59.56" | 59.71" |
| 72" | 71.56" | 71.71" |
| 84" | 83.56" | 83.71" |
| 96" | 95.56" | 95.71" |


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# ESSENTIALS VEVE™-OPTICS (02) STATIC WHITE



24VDC Linear Fixtures - Corner & Surface

## SW-HE, SW-HE+ DRY DMP LENGTHS BY INCH

### EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture   End Feed |
|---|---|
| 12" | 1" |
| 13" | 0.5" |
| 14" | 1" |
| 15" | 0.5" |
| 16" | 1" |
| 17" | 0.5" |
| 18" | 1" |
| 19" | 0.5" |
| 20" | 1" |
| 21" | 0.5" |
| 22" | 1" |
| 23" | 0.5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |

### OPTIMAL LENGTH

| Requested Nominal Length | S1   End Feed | P1   End Feed |
|---|---|---|
| 12" | 10.41" | 10.66" |
| 13" | 12.41" | 12.66" |
| 14" | 12.41" | 12.66" |
| 15" | 14.41" | 14.66" |
| 16" | 14.41" | 14.66" |
| 17" | 16.41" | 16.66" |
| 18" | 16.41" | 16.66" |
| 19" | 18.41" | 18.66" |
| 20" | 18.41" | 18.66" |
| 21" | 20.41" | 20.66" |
| 22" | 20.41" | 20.66" |
| 23" | 22.41" | 22.66" |
| 24" | 22.41" | 22.66" |
| 36" | 34.41" | 34.66" |
| 48" | 46.41" | 46.66" |
| 60" | 58.41" | 58.66" |
| 72" | 70.41" | 70.66" |
| 84" | 82.41" | 82.66" |
| 96" | 94.41" | 94.66" |

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIM TO LEVEL | INDOOR | | OUTDOOR | |
|---|---|---|---|---|
| | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ |
| **Dim to Black** | Q6M-DC+CAP<br>QTM-DC+CAP<br>iQ-PH+QD1 | Q6M-DC+CAP<br>QTM-DC+CAP<br>iQ-PH+QD1 | QOM-DC+CAP<br>QOM-PH | QOM-DC+CAP<br>QOM-PH |
| **0.1%** | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-BOWTIE+DIMMER<br>QZ-DMX<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-BOWTIE+DIMMER<br>QZ-DMX<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | Q-SET-QZ-DMX<br>Q-SET-QZ-PH/0-10V<br>Q-SET-eLED+0-10V<br>QOM-eLED+0-10V<br>QOM-eLED+DALI-DT6<br>QOM-eLED+DALI-DT6-PS<br>QZ-DMX<br>QZ-PRO-PH/0-10V | Q-SET-QZ-DMX<br>Q-SET-QZ-PH/0-10V<br>Q-SET-eLED+0-10V<br>QOM-eLED+0-10V<br>QOM-eLED+DALI-DT6<br>QOM-eLED+DALI-DT6-PS<br>QZ-DMX<br>QZ-PRO-PH/0-10V |
| **1%** | Q-DIM<br>QTM-eLED(E)<br>QZ-DALI-DT6 | Q-DIM<br>QTM-eLED(E)<br>QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6<br>QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6<br>QZ-DALI-DT6 |
| **10%** | Non-Dim Power Supply with SW App Dongle | Non-Dim Power Supply with SW App Dongle | Q-HEX-mini-DC<br>Q-SET-mLED | |

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# ESSENTIALS VEVE™-OPTICS (02) STATIC WHITE

24VDC Linear Fixtures - Corner & Surface

| DIMMING PROTOCOL | INDOOR | | OUTDOOR | |
|---|---|---|---|---|
| | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ |
| **Non-Dim** | QT-CAB-eLED-ND<br>QTM-eLED-ND<br>QZ-ND | QT-CAB-eLED-ND<br>QTM-eLED-ND<br>QZ-ND | Q-SET-QZ-ND<br>Q-SET-eLED-ND<br>QOM-eLED-ND<br>QZ-ND | Q-SET-QZ-ND<br>Q-SET-eLED-ND<br>QOM-eLED-ND<br>QZ-ND |
| **Phase** | Q6M-DC+CAP<br>QT-CAB-QZ-PH/0-10V<br>QTM-DC+CAP<br>QTM-eLED(E)<br>QZ-BOWTIE+DIMMER<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP<br>iQ-PH+QD1 | Q6M-DC+CAP<br>QT-CAB-QZ-PH/0-10V<br>QTM-DC+CAP<br>QTM-eLED(E)<br>QZ-BOWTIE+DIMMER<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP<br>iQ-PH+QD1 | Q-HEX-mini-DC<br>Q-SET-QZ-PH/0-10V<br>Q-SET-mLED<br>QOM-DC+CAP<br>QOM-PH<br>QZ-PRO-PH/0-10V | Q-SET-QZ-PH/0-10V<br>QOM-DC+CAP<br>QOM-PH<br>QZ-PRO-PH/0-10V |
| **0-10V** | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | Q-SET-QZ-PH/0-10V<br>Q-SET-eLED+0-10V<br>QOM-eLED+0-10V<br>QZ-PRO-PH/0-10V | Q-SET-QZ-PH/0-10V<br>Q-SET-eLED+0-10V<br>QOM-eLED+0-10V<br>QZ-PRO-PH/0-10V |
| **Lutron Athena** | QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6-AWN | QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6-AWN | | |
| **ECO System** | QTM-eLED(E) | QTM-eLED(E) | | |
| **DMX** | QZ-DMX | QZ-DMX | Q-SET-QZ-DMX<br>QZ-DMX | Q-SET-QZ-DMX<br>QZ-DMX |
| **DALI-2: DT6** | QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-DALI-DT6 | QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6<br>QOM-eLED+DALI-DT6<br>QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6<br>QOM-eLED+DALI-DT6<br>QZ-DALI-DT6 |
| **SCENE App Dimmed** | Non-Dim Power Supply with SW App Dongle | Non-Dim Power Supply with SW App Dongle | | |


## COMPATIBLE MOUNTING ACCESSORIES

**HINGE - HMB-M**




Adjustable mounting bracket - Medium

**HINGE - HMB-L**




Adjustable mounting bracket - Large

**HINGE - HMB-XL**




Adjustable mounting bracket - XLarge

**Q-PIVOT**





Small mounting accessory

**Q-ANGLE**





Adjustable mounting accessory

**MMA-01**




Magnet Mount Accessory of MG-01

**MMA-04**




Magnet Mount Accessory of MG-04

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-10-05-26