




MICRO 5 ALTA-DROP (04) FOR WARM DIM

24VDC Linear Fixtures - Surface & Recessed

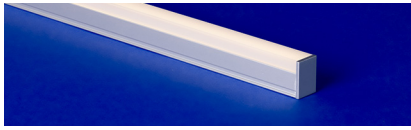

- MICRO 5 Series linear LED fixture engineered for exceptional light quality and even distribution, seamlessly blending with millwork details
- Sleek flat profile and three-sided dropped lens
- 62% smaller than ESSENTIALS-TRE3
- Delivers equivalent efficacy as standard size fixtures
- Choose from diffused or frosted lens options for varying diode visibility and beam angles
- Ideal for surface mounted or recessed installations that call for low-profile light in small areas
- Mounting options include a mounting clip, magnet option, or TBAR clip, making installation and repositioning effortless
- Used in applications to provide warmer CCTs as the light is dimmed
- When using DALI and DMX power supplies, LED wattage must be doubled
- Consult factory for field assembly options

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5
PRODUCT	WATTS/ FT	CCT	RATED	LENS
	2.0		DRY	

ADDITIONAL INFORMATION REQUIRED TO ORDER

6	7	8	9	10	11	12	13	14
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **ALTA-04-DW-2.0-20/27-DRY-FR-S1-BW-CLS-WH-CL2-SST-ST-48"-E**

1

PRODUCT

ALTA-04-DW
ALTA-04-DW-USA

Select USA option for BAA and BABA projects.

LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.

2

WATTS/FT

2.02.0W/ft

3

CCT

20/272000K/2700K
20/302000K/3000K
27/402700K/4000K
27/552700K/5500K

4

RATED

DRYIP20

5

LENS

DFDiffused
FRFrosted

For representation of LED visibility, see Diode Visibility section on following pages.
For beam angles, see Photometric Performance section on following pages

6

WIRE INPUT/OUTPUT

SINGLE (Input only)
S1End Feed
S2Bottom Feed

For continuous mounting, consider bottom feed.
When using TBC Mounting, a bare wire S2 wire feed is recommended.
See install instructions for details.

PASS THROUGH (Input/output)
P1End Feed
P2Bottom Feed

For continuous mounting, consider bottom feed.
When using TBC Mounting, a bare wire S2 wire feed is recommended.
See install instructions for details.

7

CONNECTOR/WIRE IN

BW
CON6
CON24

Bare Wire (Standard 24")
Connector 6"
Connector 24"

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

BW
CON6
CON24

Bare Wire (Standard 24")
Connector 6"
Connector 24"

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

8

CONNECTOR/WIRE OUT

CLS
Closed End (No feed)

BW
CON6
CON24

Bare Wire (Standard 24")
Connector 6"
Connector 24"

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9

WIRE COLOR

WHWhite
BKBlack

10

WIRE TYPE

CL2Class 2
CL2PPlenum Rated

CL2P only available with bare wire leads (BW)

11

MOUNTING

SSTStainless Steel
MG
TBC-099/16" Flat or Tegular TB-Grid
TBC-1015/16" Flat or Tegular TB-Grid

12

FINISH

ST
BK
CU

Satin
Black
Custom

Custom finishes require a longer lead time, consult factory

13

LENGTH (IN)

Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".

14

EXACT/OPTIMAL

E
O

Exact specified length
Optimal illumination

Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end.


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



MICRO 5 ALTA-DROP (04) FOR WARM DIM

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

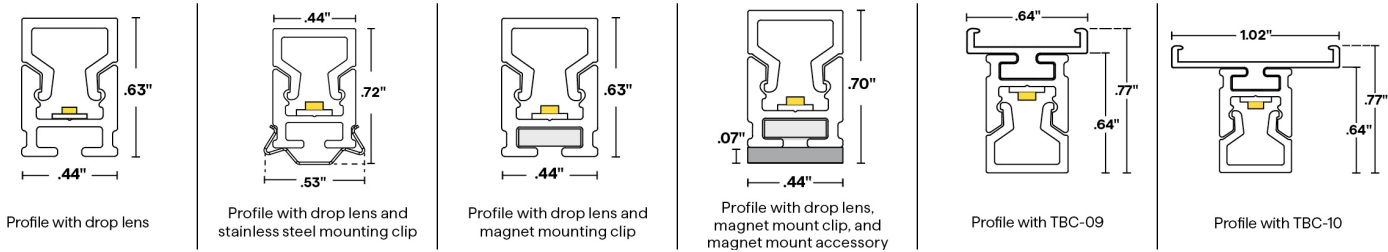


2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with ALTA-04-DW-2.0-**-DRY


	2000K		2700K		3000K		4000K		5500K	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
FR	100	94	117	98	120	98	128	97	135	97
DF	79	94	92	98	95	98	102	97	107	97

5 DIODE VISIBILITY

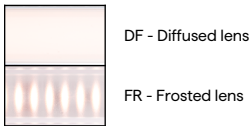

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



TEMPERATURE RATINGS

		DW 2.0 W/FT		DW 4.0 W/FT	
		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
		Min	Max	Min	Max
DRY	Ambient Operating Temp - Recessed	**	**	**	**
	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	120°F




MICRO 5 ALTA-DROP (04) FOR WARM DIM


24VDC Linear Fixtures - Surface & Recessed

6 WIRE INPUT/OUTPUT


SINGLE (Input only)



PASS THROUGH (Input/Output)




CONFIGURATION OPTIONS

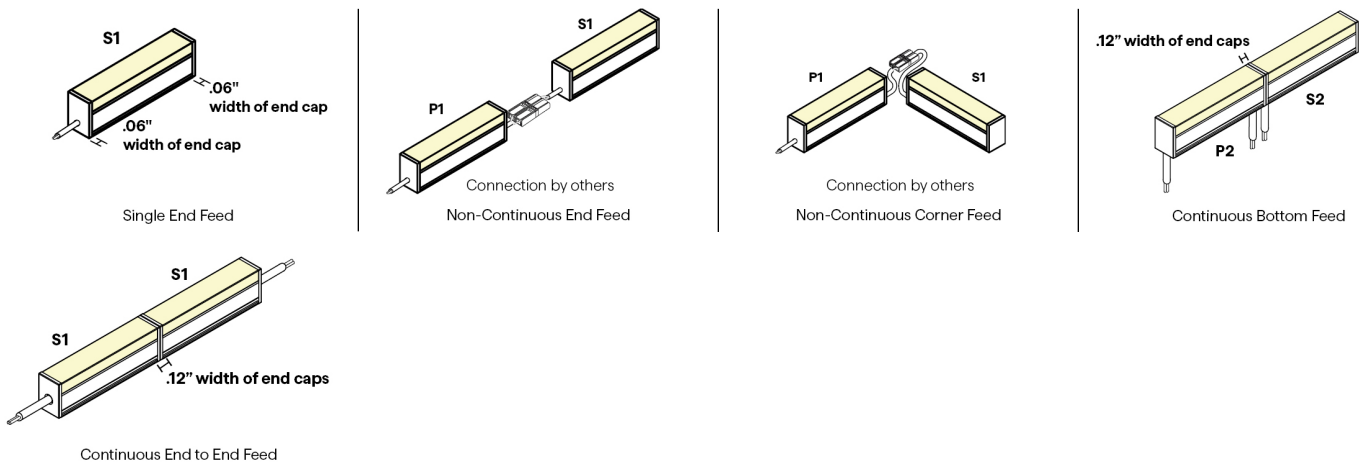

7 / 8 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out

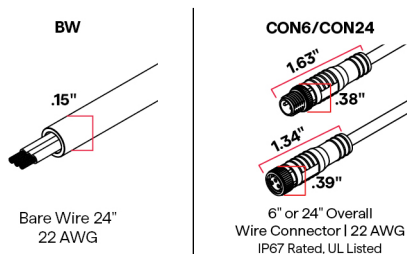

9 WIRE COLOR





MICRO 5 ALTA-DROP (04) FOR WARM DIM

24VDC Linear Fixtures - Surface & Recessed

11 MOUNTING

SST	MG	MMA-03	TBC-09	TBC-10
Stainless Steel Clip	Magnet Clip	Magnet Mount Accessory for MG-03	Plastic T-Bar Clip	Plastic T-Bar Clip
2 pieces of hardware provided for 4' or less; 4 pieces provided for greater than 4'	One MG provided per foot	96" lengths Sold separately, to order use MMA-03	Use on 9/16" Flat or Tegular Drop Ceiling	Use on 15/16" Flat or Tegular Drop Ceiling
To order separately use SST-08	To order separately use MG-03	Each bracket comes with 2 #6 x 5/8" Flat Head SS per foot	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.
Each clip comes with a #4 x 5/8" Flat Head SS		Required when mounting to a non-magnetic surface	To order separately use TBC-09	To order separately use TBC-10
			Each pair of clips comes with M2.5 x 4mm	Each pair of clips comes with M2.5 x 4mm

12 FINISH




Custom finishes require a longer lead time, consult factory

15 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

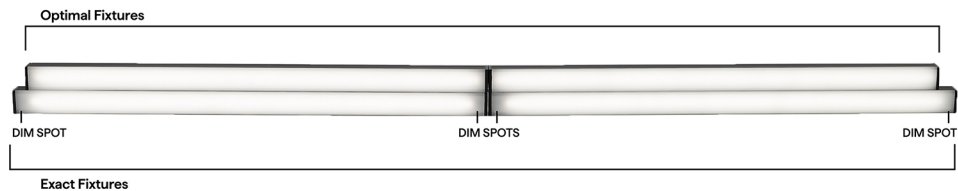



MICRO 5 ALTA-DROP (04) FOR WARM DIM





24VDC Linear Fixtures - Surface & Recessed

DW DRY LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
				
12"	10.48"		10.83"	
13"	12.48"		12.83"	
14"	12.48"		12.83"	
15"	14.48"		14.83"	
16"	14.48"		14.83"	
17"	16.48"		16.83"	
18"	16.48"		16.83"	
19"	18.48"		18.83"	
20"	18.48"		18.83"	
21"	20.48"		20.83"	
22"	20.48"		20.83"	
23"	22.48"		22.83"	
24"	22.48"		22.83"	
36"	34.48"		34.83"	
48"	46.48"		46.83"	
60"	58.48"		58.83"	
72"	70.48"		70.83"	
84"	82.48"		82.83"	
96"	94.48"		94.83"	


14

EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →

E/O Explained →

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

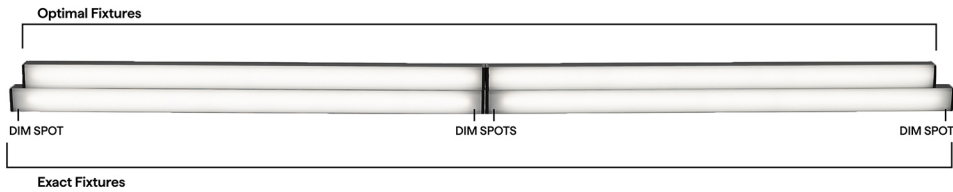



MICRO 5 ALTA-DROP (04) FOR WARM DIM

24VDC Linear Fixtures - Surface & Recessed





DW DRY LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2	
				
12"		10.48"		10.83"
13"		12.48"		12.83"
14"		12.48"		12.83"
15"		14.48"		14.83"
16"		14.48"		14.83"
17"		16.48"		16.83"
18"		16.48"		16.83"
19"		18.48"		18.83"
20"		18.48"		18.83"
21"		20.48"		20.83"
22"		20.48"		20.83"
23"		22.48"		22.83"
24"		22.48"		22.83"
36"		34.48"		34.83"
48"		46.48"		46.83"
60"		58.48"		58.83"
72"		70.48"		70.83"
84"		82.48"		82.83"
96"		94.48"		94.83"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	MICRO 5-DW Warm Dim Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DMX QZ-DW
1%	QZ-DALI-DT8
10%	Non-Dim Power Supply with WD App Dongle




MICRO 5 ALTA-DROP (04) FOR WARM DIM

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR
	MICRO 5-DW Warm Dim Applications
Phase	QZ-DW
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN
DMX LED wattage must be doubled for DW-HE products	QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle

COMPATIBLE MOUNTING ACCESSORIES


HINGE - HMB-S



1.41" .51"


Adjustable mounting bracket - Small

VHB




Double sided mounting tape

NJ-MICRO




J Mounting Bracket

BL-MICRO




Backwards L Mounting Bracket

NL-MICRO



L Mounting Bracket

SD-L-MICRO



L Mounting Bracket

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5



2.80" 2.27"

UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



1.36" 2.58"

Wi-Fi or Bluetooth Connectivity



MICRO 5 ALTA-DROP (04) FOR WARM DIM

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage