




MICRO 5 ALTA-DROP (04) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed



410.2 & 410.16
Closet Rated
in 1.0-2.0W/ft

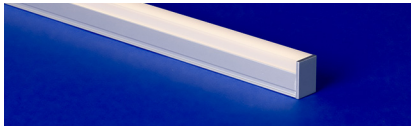

- MICRO 5 Series linear LED fixture engineered for exceptional light quality and even distribution, seamlessly blending with millwork details
- Sleek flat profile and three-sided dropped lens
- 62% smaller than ESSENTIALS-TRE3
- Delivers equivalent efficacy as standard size fixtures
- Choose from diffused or frosted lens options for varying diode visibility and beam angles
- Ideal for surface mounted or recessed installations that call for low-profile light in small areas
- Mounting options include a mounting clip, magnet option, or TBAR clip, making installation and repositioning effortless
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 2.0 watts or less per foot per NEC regulations
- Consult factory for field assembly options

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5
PRODUCT	WATTS/ FT	CCT	RATED	LENS

ADDITIONAL INFORMATION REQUIRED TO ORDER

6	7	8	9	10	11	12	13	14
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **ALTA-04-SW-1.0-30-DRY-FR-S1-BW-CLS-WH-CL2-SST-ST-48"-E**

1

PRODUCT

ALTA-04-SW

ALTA-04-SW-USA

Select USA option for BAA and BABA projects. Only DRY ratings apply.

See following pages for compatible power supplies.

2

WATTS/FT

1.01.0W/ft

2.02.0W/ft

4.04.0W/ft

1.01.0W/ft

2.02.0W/ft

4.04.0W/ft

3

CCT

202000K

222200K

242400K

272700K

303000K

353500K

404000K

242400K

272700K

303000K

353500K

404000K

4

RATED

DRYIP20

DMPIP54

5

LENS

DFDiffused

FRFrosted

For representation of LED visibility, see Diode Visibility section on following pages.

For beam angles, see Photometric Performance section on following pages

6

WIRE INPUT/OUTPUT

SINGLE (Input only)

S1End Feed

S2Bottom Feed

For continuous mounting, consider bottom feed.

When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.

PASS THROUGH (Input/output)

P1End Feed

P2Bottom Feed

For continuous mounting, consider bottom feed.

When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.

7

CONNECTOR/WIRE IN

BWBare Wire (Standard 24")

BRLBarrel

CON6Connector 6"

CON24Connector 24"

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

BWBare Wire (Standard 24")

BRLBarrel

CON6Connector 6"

CON24Connector 24"

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

8

CONNECTOR/WIRE OUT

CLSClosed End (No feed)

BWBare Wire (Standard 24")

BRLBarrel

CON6Connector 6"

CON24Connector 24"

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9

WIRE COLOR

WHWhite

BKBlack

N/AFor Barrel

10

WIRE TYPE

CL2Class 2

CL2PPlenum Rated

N/AFor Barrel

CL2P only available with bare wire leads (BW)

11

MOUNTING

SSTStainless Steel

MGMagnet

TBC-099/16" Flat or Tegular TB-Grid

TBC-1015/16" Flat or Tegular TB-Grid

12

FINISH

STSatin

BKBlack

CUCustom

Custom finishes require a longer lead time, consult factory

13

LENGTH (IN)

Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".

14

EXACT/OPTIMAL

EExact specified length

OOptimal illumination

Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end.


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance | Title 24 - JA8-2019 Static White Strip: All wattages, CCT and IP



MICRO 5 ALTA-DROP (04) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

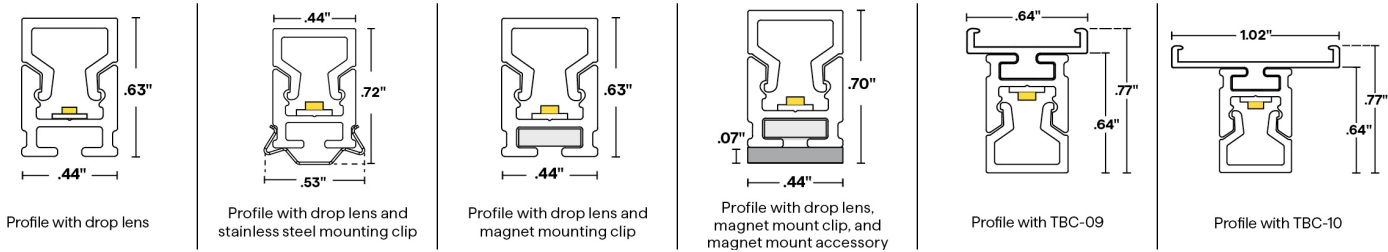


2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with ALTA-04-SW-**-30-DRY


	1.0 W/FT		2.0 W/FT		4.0 W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
FR	61	97	124	98	262	98
DF	49	97	97	98	204	98

5 DIODE VISIBILITY



PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.





MICRO 5 ALTA-DROP (04) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS


		1.0 W/FT		2.0 W/FT		4.0 W/FT	
		Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Recessed	**	**	**	**	**	**
	Ambient Operating Temp - Surface	-4°F	145°F	-4°F	140°F	-4°F	120°F
DMP	Ambient Operating Temp - Recessed	**	**	**	**	**	**
	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	135°F	-4°F	115°F

6 WIRE INPUT/OUTPUT


SINGLE (Input only)

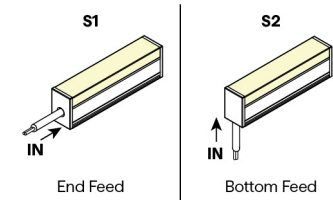

PASS THROUGH (Input/Output)



CONFIGURATION OPTIONS

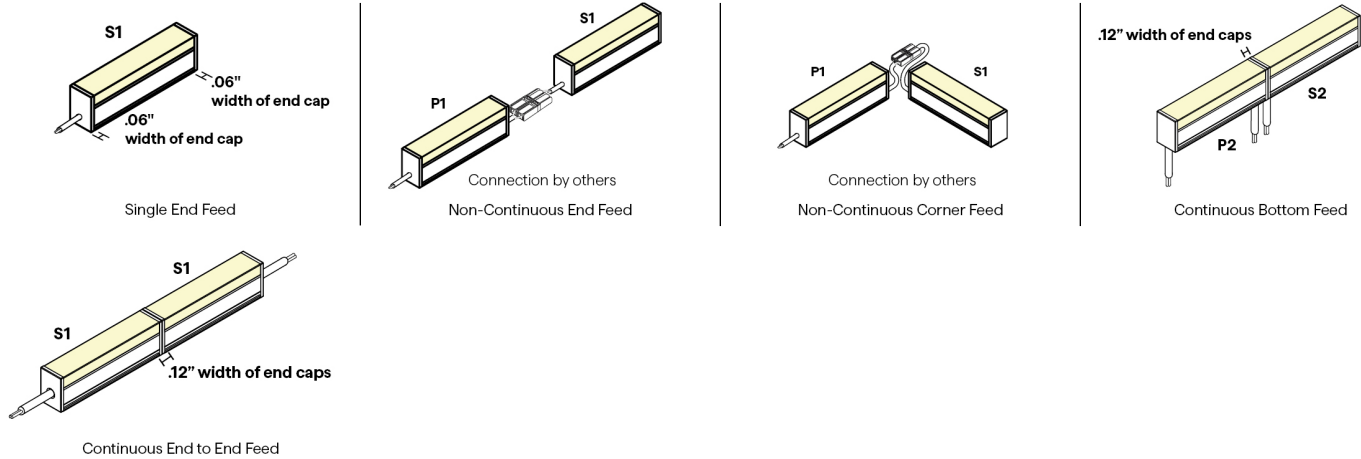




MICRO 5 ALTA-DROP (04) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

7 / 8 CONNECTOR/WIRE – IN/OUT


Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out



Bare Wire 24"
22 AWG



Barrel 6" - DRY/DMP |
22 AWG




6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

9 WIRE COLOR



11 MOUNTING

SST




Stainless Steel Clip

2 pieces of hardware
provided for 4' or less; 4
pieces provided for greater
than 4'

To order separately use
SST-08

Each clip comes with a #4 x
5/8" Flat Head SS

MG




Magnet Clip

One MG provided per foot

To order separately use
MG-03

MMA-03




Magnet Mount
Accessory for MG-03

96" lengths | Sold separately,
to order use MMA-03

Each bracket comes with 2
#6 x 5/8" Flat Head SS per
foot

Required when mounting to
a non-magnetic surface

TBC-09



Plastic T-Bar Clip


Use on 9/16" Flat or Tegular
Drop Ceiling

2 clips provided for first 12"; 1
clip provided for each
additional 12" or less length. 1
T-Bar Mounting Jig included
with each fixture.

To order separately use
TBC-09

Each pair of clips comes with
M2.5 x 4mm

TBC-10



Plastic T-Bar Clip

Use on 15/16" Flat or Tegular
Drop Ceiling

2 clips provided for first 12"; 1
clip provided for each
additional 12" or less length. 1
T-Bar Mounting Jig included
with each fixture.

To order separately use
TBC-10

Each pair of clips comes with
M2.5 x 4mm

12 FINISH



Custom finishes require a longer lead time, consult factory



MICRO 5 ALTA-DROP (04) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

15

EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →

E/O Explained →

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.



SW DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	S1
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2	P1 & P2
	S1 End Feed Bottom Feed	P1 End Feed Bottom Feed
12"	11.38"	11.63"
13"	12.38"	12.63"
14"	13.38"	13.63"
15"	14.38"	14.63"
16"	15.38"	15.63"
17"	16.38"	16.63"
18"	17.38"	17.63"
19"	18.38"	18.63"
20"	19.38"	19.63"
21"	20.38"	20.63"
22"	21.38"	21.63"
23"	22.38"	22.63"
24"	23.38"	23.63"
36"	35.38"	35.63"
48"	47.38"	47.63"
60"	59.38"	59.63"
72"	71.38"	71.63"
84"	83.38"	83.63"
96"	95.38"	95.63"


14

EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →

E/O Explained →

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

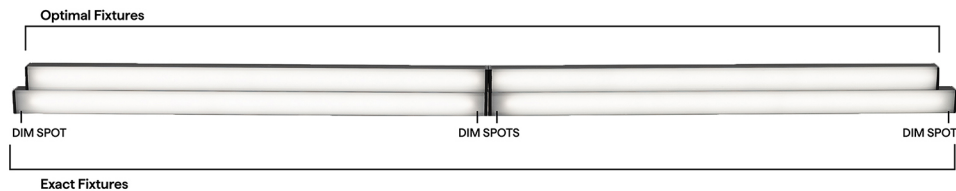




MICRO 5 ALTA-DROP (04) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

SW DRY DMP LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH		OPTIMAL LENGTH		
Requested Length	Potential dim spot on either end of fixture	Requested Nominal Length	<div><div>S1</div><div>S2</div></div>	<div><div>P1 & P2</div></div>
12"	.5"	12"	 End Feed	 End Feed
13"	.5"	13"	 Bottom Feed	 Bottom Feed
14"	.5"	14"		
15"	.5"	15"		
16"	.5"	16"		
17"	.5"	17"		
18"	.5"	18"		
19"	.5"	19"		
20"	.5"	20"		
21"	.5"	21"		
22"	.5"	22"		
23"	.5"	23"		
24"	.5"	24"		
36"	.5"	36"		
48"	.5"	48"		
60"	.5"	60"		
72"	.5"	72"		
84"	.5"	84"		
96"	.5"	96"		

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	MICRO 5-SW
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle









MICRO 5 ALTA-DROP (04) STATIC WHITE








24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR
	MICRO 5-SW
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)
DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-S	VHB	NJ-MICRO	BL-MICRO	NL-MICRO	SD-L-MICRO
					
Adjustable mounting bracket - Small 1.41" .51"	Double sided mounting tape	J Mounting Bracket	Backwards L Mounting Bracket	L Mounting Bracket	L Mounting Bracket

COMPATIBLE WIRING ACCESSORIES

Q-mini-J	Q-mini-J5	BARREL-EXT	BARREL FOUR-FER	CON120-EXT	CON FOUR-FER	CON M - BARREL F
						
UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	8ft barrel cable extender DRY ONLY	Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	10ft Con cable extender DRY/DMP/WET	Splits lead from one to four LED Con connectors DRY/DMP/WET	Male con to barrel cable adaptor DRY/DMP



MICRO 5 ALTA-DROP (04) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth
Connectivity

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage