





MICRO 5 ATOM-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed



- MICRO 5 Series linear LED fixture engineered for exceptional light quality and even distribution, seamlessly blending with millwork details
- 60% smaller than ESSENTIALS-TORQ
- Delivers equivalent efficacy as standard size fixtures
- Choose from diffused or frosted lens options for varying diode visibility and beam angles
- Ideal for surface mounted or recessed installations that call for low-profile light in small areas
- Features a stainless steel mounting clip, making installation and repositioning effortless
- Used in applications where CCT and brightness need to be controlled separately
- When using DALI and DMX power supplies, LED wattage must be doubled
- Consult factory for field assembly options

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5
PRODUCT	WATTS/ FT	CCT	RATED	LENS
	2.0		DRY	

ADDITIONAL INFORMATION REQUIRED TO ORDER

6	7	8	9	10	11	12	13	14
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL
					SST			

Sample Part Number: **ATOM-01-DW-2.0-20/27-DRY-FR-S1-BW-CLS-WH-CL2-SST-ST-48"-E**

1

PRODUCT

ATOM-01-DW

ATOM-01-DW-USA

Select USA option for BAA and BABA projects.

LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.

2

WATTS/FT

2.0

2.0W/ft

3

CCT

20/27

2000K/2700K

20/30

2000K/3000K

27/40

2700K/4000K

27/55

2700K/5500K

4

RATED

DRY

IP20

5

LENS

DF

Diffused

FR

Frosted

For representation of LED visibility, see Diode Visibility section on following pages.

For beam angles, see Photometric Performance section on following pages

6

WIRE INPUT/OUTPUT

SINGLE (Input only)

S1End Feed

S2Bottom Feed

S3Left Side Feed

S4Right Side Feed

For continuous mounting, consider bottom feed.

PASS THROUGH (Input/output)

P1End Feed

P2Bottom Feed

P3Left Side Feed

P4Right Side Feed

For continuous mounting, consider bottom feed.

7

CONNECTOR/WIRE IN

BW

Bare Wire (Standard 24")

CON6

Connector 6"

CON24

Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

BW

Bare Wire (Standard 24")

CON6

Connector 6"

CON24

Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

8

CONNECTOR/WIRE OUT

CLS

Closed End (No feed)

BW

Bare Wire (Standard 24")

CON6

Connector 6"

CON24

Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9

WIRE COLOR

WH

White

BK

Black

10

WIRE TYPE

CL2

Class 2

CL2P

Plenum Rated

CL2P only available with bare wire leads (BW)

11

MOUNTING

SST

Stainless Steel

12

FINISH

ST

Satin

BK

Black

CU

Custom

Custom finishes require a longer lead time, consult factory

13

LENGTH (IN)

Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".

14

EXACT/OPTIMAL

E

Exact specified length

O

Optimal illumination

Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end.


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




MICRO 5 ATOM-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS



Profile with flat lens




Profile with flat lens and stainless steel mounting clip

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with ATOM-01-DW-2.0-**-DRY

	2000K		2700K		3000K		4000K		5500K	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
FR	123	93	135	98	145	98	149	98	158	97
DF	72	93	78	98	80	98	85	98	89	97

5 DIODE VISIBILITY




DF - Diffused lens

FR - Frosted lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



DF lens at 3000K

TEMPERATURE RATINGS

		DW 2.0 W/FT		DW 4.0 W/FT	
		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
		Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	120°F

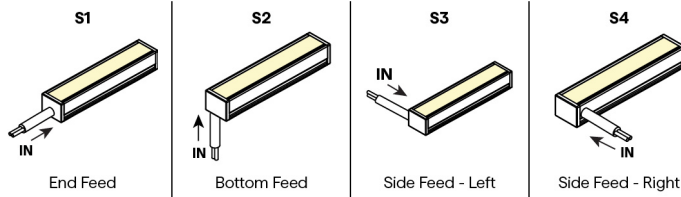


MICRO 5 ATOM-FLAT (01) FOR TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

6 WIRE INPUT/OUTPUT


SINGLE (Input only)



PASS THROUGH (Input/Output)

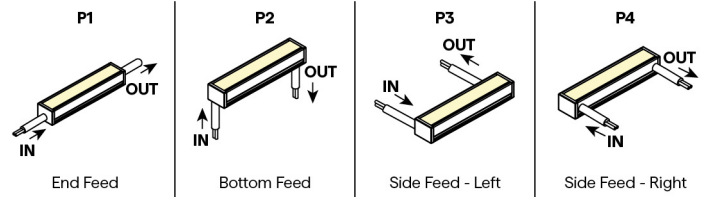


CONFIGURATION OPTIONS

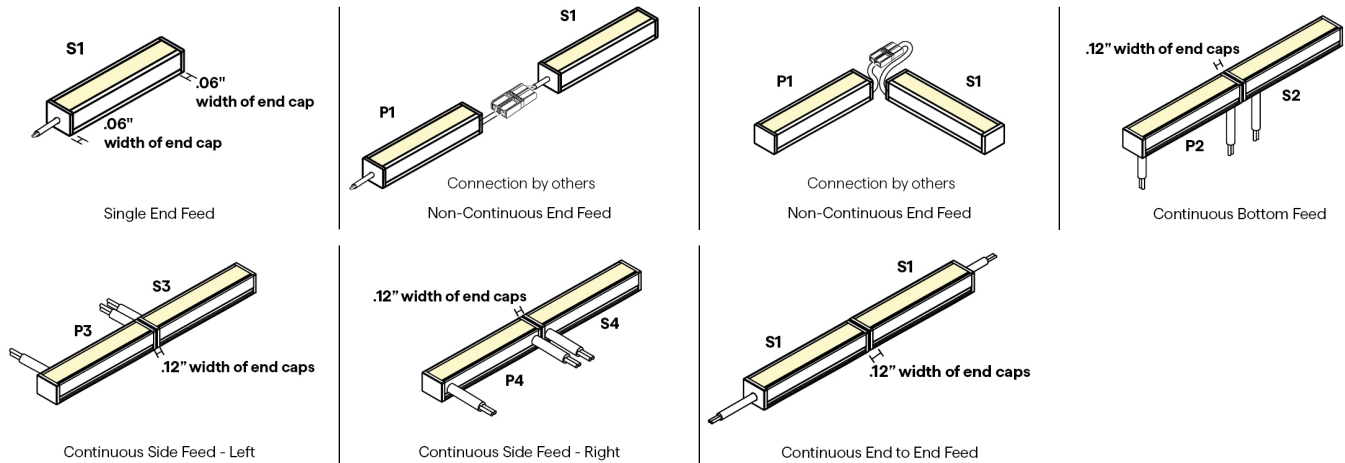

7 / 8 CONNECTOR/WIRE - IN/OUT

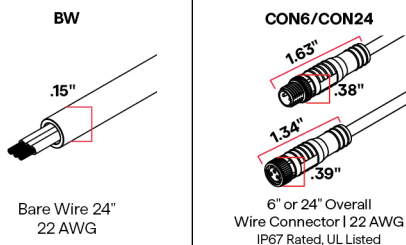Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out



9 WIRE COLOR






MICRO 5 ATOM-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

11 MOUNTING

SST



Stainless Steel Clip

2 pieces of hardware provided for 4' or less; 4 pieces provided for greater than 4'

To order separately use SST-08

Each clip comes with a #4 x 5/8" Flat Head SS

12 FINISH



Satin

Black

Custom finishes require a longer lead time, consult factory

15 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.





MICRO 5 ATOM-FLAT (01) FOR TUNABLE APPLICATIONS









24VDC Linear Fixtures - Surface & Recessed

DW DRY LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 & S3 & S4				P1 & P2 & P3 & P4			
								
12"			10.48"				10.83"	
13"			12.48"				12.83"	
14"			12.48"				12.83"	
15"			14.48"				14.83"	
16"			14.48"				14.83"	
17"			16.48"				16.83"	
18"			16.48"				16.83"	
19"			18.48"				18.83"	
20"			18.48"				18.83"	
21"			20.48"				20.83"	
22"			20.48"				20.83"	
23"			22.48"				22.83"	
24"			22.48"				22.83"	
36"			34.48"				34.83"	
48"			46.48"				46.83"	
60"			58.48"				58.83"	
72"			70.48"				70.83"	
84"			82.48"				82.83"	
96"			94.48"				94.83"	

14

EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →

E/O Explained →

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.





MICRO 5 ATOM-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed









DW DRY LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2 & S3 & S4				P1 & P2 & P3 & P4			
	S1 	S2 	S3 	S4 	P1 	P2 	P3 	P4 
12"			10.48"				10.83"	
13"			12.48"				12.83"	
14"			12.48"				12.83"	
15"			14.48"				14.83"	
16"			14.48"				14.83"	
17"			16.48"				16.83"	
18"			16.48"				16.83"	
19"			18.48"				18.83"	
20"			18.48"				18.83"	
21"			20.48"				20.83"	
22"			20.48"				20.83"	
23"			22.48"				22.83"	
24"			22.48"				22.83"	
36"			34.48"				34.83"	
48"			46.48"				46.83"	
60"			58.48"				58.83"	
72"			70.48"				70.83"	
84"			82.48"				82.83"	
96"			94.48"				94.83"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	MICRO 5-DW Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED+TW-AWN
1%	QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle










MICRO 5 ATOM-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR
	MICRO 5-DW Tunable Applications
0-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-S	QUOVA-MICRO	VHB	NJ-MICRO	BL-MICRO	NL-MICRO	SD-L-MICRO
						
1.41" .51"						
Adjustable mounting bracket - Small	QUOVA Knife Edge	Double sided mounting tape	J Mounting Bracket	Backwards L Mounting Bracket	L Mounting Bracket	L Mounting Bracket

COMPATIBLE WIRING ACCESSORIES



COMPATIBLE CONTROL ACCESSORIES





MICRO 5 ATOM-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage