





MICRO 5 POP-FLAT (01)

STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed



410.2 & 410.16
Closet Rated
in 1.0-2.0W/ft



- MICRO 5 Series linear LED fixture engineered for exceptional light quality and even distribution, seamlessly blending with millwork details
- Asymmetric fixture with an 80° focused beam 20° off-nadir
- Ideal for recessed installations that call for low-profile light in small areas
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 2.0 watts or less per foot per NEC regulations
- Consult factory for field assembly options

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5
PRODUCT	WATTS/ FT	CCT	RATED	LENS

ADDITIONAL INFORMATION REQUIRED TO ORDER

6	7	8	9	10	11	12	13	14
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **POP-01-SW-4.0-30-DRY-DF-S1A-BW-CLS-WH-CL2-MG-ST-48"-E**

1

PRODUCT

POP-01-SW

POP-01-SW-USA

Select USA option for BAA and BABA projects. Only DRY ratings apply.

See following pages for compatible power supplies.

2

WATTS/FT

1.01.0W/ft

2.02.0W/ft

4.04.0W/ft

1.01.0W/ft

2.02.0W/ft

4.04.0W/ft

3

CCT

202000K

222200K

242400K

272700K

303000K

353500K

404000K

242400K

272700K

303000K

353500K

404000K

4

RATED

DRYIP20

DMPIP54

5

LENS

DFDiffused

PRPolar

For representation of LED visibility, see Diode Visibility section on following pages.
For beam angles, see Photometric Performance section on following pages

6

WIRE INPUT/OUTPUT

SINGLE (Input only)

S1AEnd Feed

S1BEnd Feed

S2ABottom Feed

S2BBottom Feed

For continuous mounting, consider bottom feed.

PASS THROUGH (Input/output)

P1AEnd Feed

P1BEnd Feed

P2ABottom Feed

P2BBottom Feed

For continuous mounting, consider bottom feed.

7

CONNECTOR/WIRE IN

BWBare Wire (Standard 24")

BRLBarrel

CON6Connector 6"

CON24Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

BWBare Wire (Standard 24")

BRLBarrel

CON6Connector 6"

CON24Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

8

CONNECTOR/WIRE OUT

CLSClosed End (No feed)

BWBare Wire (Standard 24")

BRLBarrel

CON6Connector 6"

CON24Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9

WIRE COLOR

WHWhite

BKBlack

N/AFor Barrel

10

WIRE TYPE

CL2Class 2

CL2PPlenum Rated

N/AFor Barrel

CL2P only available with bare wire leads (BW)

11

MOUNTING

MGMagnet

832832 Silicone

PLPlastic Clip

12

FINISH

STSatin

BKBlack

BZBronze

WHWhite

CUCustom

Custom finishes have longer lead times. Non-RAL

13

LENGTH (IN)

Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".

14

EXACT/OPTIMAL

EExact specified length

OOptimal illumination

Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end.

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




MICRO 5 POP-FLAT (01)

STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

1


PRODUCT - DIMENSIONS




Profile



Profile with magnet clip



Profile with magnet clip and magnet mount accessory



Profile with plastic mounting clip

2


DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with POP-01-SW-**-30-DRY

	1.0 W/FT		2.0 W/FT		4.0 W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
PR	42	97	85	98	198	98
DF	38	97	74	98	178	98


5

DIODE VISIBILITY



PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



DF lens at 3000K



MICRO 5 POP-FLAT (01)

STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS


		1.0 W/FT		2.0 W/FT		4.0 W/FT	
		Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Recessed	-4°F	135°F	-4°F	130°F	-4°F	110°F
DMP	Ambient Operating Temp - Recessed	-4°F	130°F	-4°F	125°F	-4°F	105°F

6 WIRE INPUT/OUTPUT


ASYMMETRIC ONLY SINGLE (Input only)

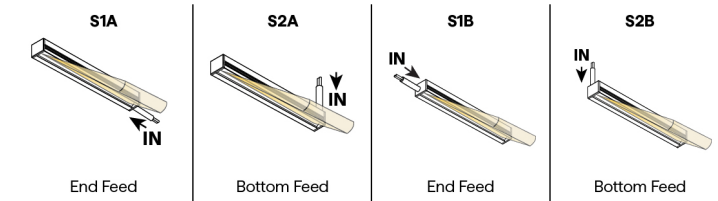

ASYMMETRIC ONLY PASS THROUGH (Input/Output)

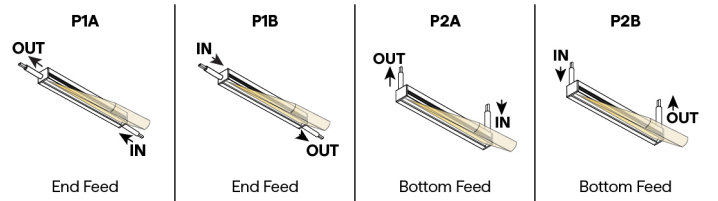

CONFIGURATION OPTIONS

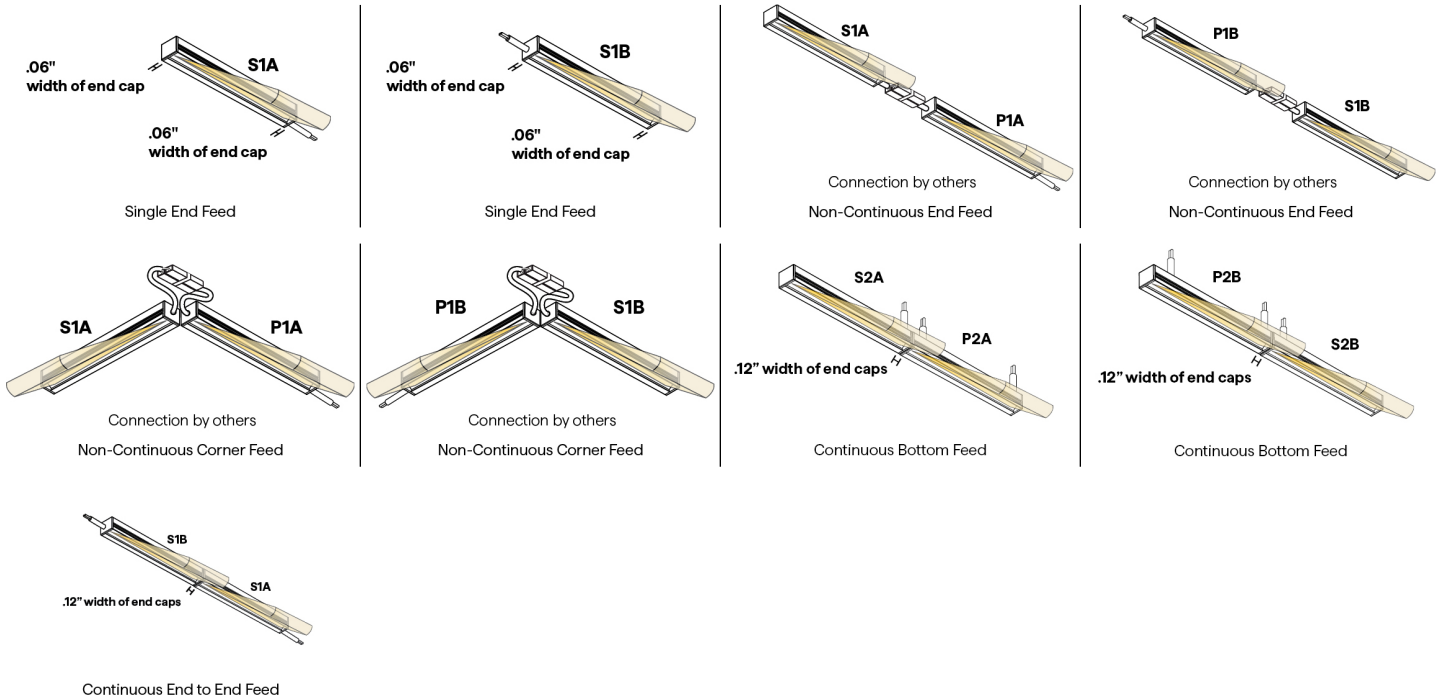



MICRO 5 POP-FLAT (01)


STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed


7 / 8

CONNECTOR/WIRE – IN/OUT


Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out



Bare Wire 24" 22 AWG



Barrel 6" - DRY/DMP I 22 AWG



6" or 24" Overall Wire Connector | 22 AWG IP67 Rated, UL Listed

9


WIRE COLOR



11

MOUNTING


MG



Magnet Clip

One MG provided per foot
To order separately use MG-05

PL



Plastic Clip

2 clips provided for 4' or less;
4 clips provided for greater than 4'

To order separately use PLC-16

Each clip comes with a #6x1/4" and #6x1/2" Flat Head SS


832



832 Silicone

Sold separately

MMA-05



Magnet Mount Accessory for MG-05


Sold separately, to order use MMA-05

Each bracket comes with 2 #6 x 5/8" Flat Head SS per foot

Required when mounting to a non-magnetic surface

12

FINISH



Custom finishes require a longer lead time, consult factory



MICRO 5 POP-FLAT (01)

STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

15

EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →

E/O Explained →

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.



SW DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	S1
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

OPTIMAL LENGTH

Requested Nominal Length	S1A/B & S2A/B		P1A/B & P2A/B	
	S1	S2	P1	P2
12"	11.50"		11.75"	
13"	12.50"		12.75"	
14"	13.50"		13.75"	
15"	14.50"		14.75"	
16"	15.50"		15.75"	
17"	16.50"		16.75"	
18"	17.50"		17.75"	
19"	18.50"		18.75"	
20"	19.50"		19.75"	
21"	20.50"		20.75"	
22"	21.50"		21.75"	
23"	22.50"		22.75"	
24"	23.50"		23.75"	
36"	35.50"		35.75"	
48"	47.50"		47.75"	
60"	59.50"		59.75"	
72"	71.50"		71.75"	
84"	83.50"		83.75"	
96"	95.50"		95.75"	


14

EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →

E/O Explained →

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

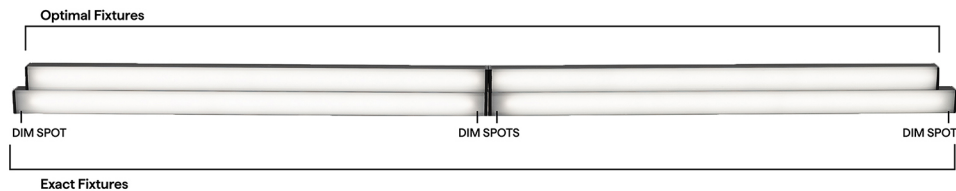





MICRO 5 POP-FLAT (01)

STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

SW DRY DMP LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 – 1/8". Consult factory for lengths under 12".

EXACT LENGTH		OPTIMAL LENGTH		
Requested Length	Potential dim spot on either end of fixture	S1A/B & S2A/B		P1A/B & P2A/B
				 
12"	.5"		11.5"	11.75"
13"	.5"		12.5"	12.75"
14"	.5"		13.5"	13.75"
15"	.5"		14.5"	14.75"
16"	.5"		15.5"	15.75"
17"	.5"		16.5"	16.75"
18"	.5"		17.5"	17.75"
19"	.5"		18.5"	18.75"
20"	.5"		19.5"	19.75"
21"	.5"		20.5"	20.75"
22"	.5"		21.5"	21.75"
23"	.5"		22.5"	22.75"
24"	.5"		23.5"	23.75"
36"	.5"		35.5"	35.75"
48"	.5"		47.5"	47.75"
60"	.5"		59.5"	59.75"
72"	.5"		71.5"	71.75"
84"	.5"		83.5"	83.75"
96"	.5"		95.5"	95.75"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	MICRO 5-SW
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle










MICRO 5 POP-FLAT (01)

STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR
	MICRO 5-SW
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)
DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle

COMPATIBLE WIRING ACCESSORIES

<div>Q-mini-J</div> <div></div> <div>UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)</div>	<div>Q-mini-J5</div> <div></div> <div>UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)</div>	<div>BARREL-EXT</div> <div></div> <div>8ft barrel cable extender DRY ONLY</div>	<div>BARREL FOUR-FER</div> <div></div> <div>Splits lead from one to four LED Barrel connector fixtures, DRY/DMP</div>	<div>CON120-EXT</div> <div></div> <div>10ft Con cable extender DRY/DMP/WET</div>	<div>CON FOUR-FER</div> <div></div> <div>Splits lead from one to four LED Con connectors DRY/DMP/WET</div>	<div>CON M - BARREL F</div> <div></div> <div>Male con to barrel cable adaptor DRY/DMP</div>
--	---	--	--	---	---	---

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE





MICRO 5 POP-FLAT (01)

STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage