



OPTI-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed





410.2 & 410.16
Closet Rated
up to 4.0W/ft



BUY AMERICAN
ACT COMPLIANT



BUILD AMERICA
BUY AMERICA
COMPLIANT



- Choose from diffused, polar or frosted lens options for varying diode visibility and beam cutoff
- Delivers smooth and consistent light to highlight architectural features and surfaces
- Ideal for surface-mounted installations
- Integrated metal end caps combined with an extruded aluminum housing give this fixture a polished modern look
- Suitable for installation in the storage area of a clothes closet when specified at 4.0 watts or less per foot per NEC regulations

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5
PRODUCT	WATTS/ FT	CCT	RATED	LENS

ADDITIONAL INFORMATION REQUIRED TO ORDER

6	7	8	9	10	11	12	13	14
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **OP1SW-5.0-30-DRY-DF-S1-BW-CLS-BK-CL2-CC-BK-48"-E**

1 PRODUCT OP1SW OP1SW-USA Select USA option for BAA and BABA projects. Only DRY or WET ratings apply. See following pages for compatible power supplies.	2 WATTS/FT <table><tr><td>1.5</td><td>1.5W/ft</td></tr><tr><td>3.0</td><td>3.0W/ft</td></tr><tr><td>4.0</td><td>4.0W/ft</td></tr><tr><td>5.0</td><td>5.0W/ft</td></tr><tr><td>1.5HE</td><td>1.5W/ft HE</td></tr><tr><td>3.0HE</td><td>3.0W/ft HE</td></tr><tr><td>6.0HE</td><td>6.0W/ft HE</td></tr><tr><td>9.0HE</td><td>9.0W/ft HE</td></tr></table> <table><tr><td>1.5</td><td>1.5W/ft</td></tr><tr><td>3.0</td><td>3.0W/ft</td></tr><tr><td>4.0</td><td>4.0W/ft</td></tr><tr><td>5.0</td><td>5.0W/ft</td></tr><tr><td>1.5HE</td><td>1.5W/ft HE</td></tr><tr><td>3.0HE</td><td>3.0W/ft HE</td></tr><tr><td>6.0HE</td><td>6.0W/ft HE</td></tr></table> <table><tr><td>1.5</td><td>1.5W/ft</td></tr><tr><td>3.0</td><td>3.0W/ft</td></tr><tr><td>4.0</td><td>4.0W/ft</td></tr><tr><td>5.0</td><td>5.0W/ft</td></tr></table>	1.5	1.5W/ft	3.0	3.0W/ft	4.0	4.0W/ft	5.0	5.0W/ft	1.5HE	1.5W/ft HE	3.0HE	3.0W/ft HE	6.0HE	6.0W/ft HE	9.0HE	9.0W/ft HE	1.5	1.5W/ft	3.0	3.0W/ft	4.0	4.0W/ft	5.0	5.0W/ft	1.5HE	1.5W/ft HE	3.0HE	3.0W/ft HE	6.0HE	6.0W/ft HE	1.5	1.5W/ft	3.0	3.0W/ft	4.0	4.0W/ft	5.0	5.0W/ft	3 CCT <table><tr><td>18</td><td>1800K</td></tr><tr><td>20</td><td>2000K</td></tr><tr><td>22</td><td>2200K</td></tr><tr><td>24</td><td>2400K</td></tr><tr><td>27</td><td>2700K</td></tr><tr><td>30</td><td>3000K</td></tr><tr><td>35</td><td>3500K</td></tr><tr><td>40</td><td>4000K</td></tr></table> <table><tr><td>18</td><td>1800K</td></tr><tr><td>20</td><td>2000K</td></tr><tr><td>22</td><td>2200K</td></tr><tr><td>24</td><td>2400K</td></tr><tr><td>27</td><td>2700K</td></tr><tr><td>30</td><td>3000K</td></tr><tr><td>35</td><td>3500K</td></tr><tr><td>40</td><td>4000K</td></tr></table> <table><tr><td>18</td><td>1800K</td></tr><tr><td>20</td><td>2000K</td></tr><tr><td>22</td><td>2200K</td></tr><tr><td>24</td><td>2400K</td></tr><tr><td>27</td><td>2700K</td></tr><tr><td>30</td><td>3000K</td></tr><tr><td>35</td><td>3500K</td></tr><tr><td>40</td><td>4000K</td></tr></table>	18	1800K	20	2000K	22	2200K	24	2400K	27	2700K	30	3000K	35	3500K	40	4000K	18	1800K	20	2000K	22	2200K	24	2400K	27	2700K	30	3000K	35	3500K	40	4000K	18	1800K	20	2000K	22	2200K	24	2400K	27	2700K	30	3000K	35	3500K	40	4000K	4 RATED <table><tr><td>DRY</td><td>IP20</td></tr></table> <table><tr><td>DMP</td><td>IP54</td></tr></table> <table><tr><td>WET</td><td>IP67</td></tr><tr><td colspan="2">Can be suitable for exterior use. Contact factory for more information</td></tr></table>	DRY	IP20	DMP	IP54	WET	IP67	Can be suitable for exterior use. Contact factory for more information	
1.5	1.5W/ft																																																																																																
3.0	3.0W/ft																																																																																																
4.0	4.0W/ft																																																																																																
5.0	5.0W/ft																																																																																																
1.5HE	1.5W/ft HE																																																																																																
3.0HE	3.0W/ft HE																																																																																																
6.0HE	6.0W/ft HE																																																																																																
9.0HE	9.0W/ft HE																																																																																																
1.5	1.5W/ft																																																																																																
3.0	3.0W/ft																																																																																																
4.0	4.0W/ft																																																																																																
5.0	5.0W/ft																																																																																																
1.5HE	1.5W/ft HE																																																																																																
3.0HE	3.0W/ft HE																																																																																																
6.0HE	6.0W/ft HE																																																																																																
1.5	1.5W/ft																																																																																																
3.0	3.0W/ft																																																																																																
4.0	4.0W/ft																																																																																																
5.0	5.0W/ft																																																																																																
18	1800K																																																																																																
20	2000K																																																																																																
22	2200K																																																																																																
24	2400K																																																																																																
27	2700K																																																																																																
30	3000K																																																																																																
35	3500K																																																																																																
40	4000K																																																																																																
18	1800K																																																																																																
20	2000K																																																																																																
22	2200K																																																																																																
24	2400K																																																																																																
27	2700K																																																																																																
30	3000K																																																																																																
35	3500K																																																																																																
40	4000K																																																																																																
18	1800K																																																																																																
20	2000K																																																																																																
22	2200K																																																																																																
24	2400K																																																																																																
27	2700K																																																																																																
30	3000K																																																																																																
35	3500K																																																																																																
40	4000K																																																																																																
DRY	IP20																																																																																																
DMP	IP54																																																																																																
WET	IP67																																																																																																
Can be suitable for exterior use. Contact factory for more information																																																																																																	
5 LENS <table><tr><td>DF</td><td>Diffused</td></tr><tr><td>PR</td><td>Polar</td></tr><tr><td>FR</td><td>Frosted</td></tr></table>	DF	Diffused	PR	Polar	FR	Frosted	6 WIRE INPUT/OUTPUT <table><tr><td colspan="2">SINGLE (Input only)</td></tr><tr><td>S1</td><td>End Feed</td></tr><tr><td>S2</td><td>Bottom Feed</td></tr></table> <table><tr><td colspan="2">PASS THROUGH (Input/Output)</td></tr><tr><td>P1</td><td>End Feed</td></tr><tr><td>P2</td><td>Bottom Feed</td></tr></table>	SINGLE (Input only)		S1	End Feed	S2	Bottom Feed	PASS THROUGH (Input/Output)		P1	End Feed	P2	Bottom Feed	7 CONNECTOR/WIRE IN <table><tr><td>BW</td><td>Bare Wire (Standard 36")</td></tr><tr><td>CON6</td><td>Connector 6"</td></tr><tr><td>CON24</td><td>Connector 24"</td></tr></table> <table><tr><td>BW</td><td>Bare Wire (Standard 36")</td></tr><tr><td>CON6</td><td>Connector 6"</td></tr><tr><td>CON24</td><td>Connector 24"</td></tr></table>	BW	Bare Wire (Standard 36")	CON6	Connector 6"	CON24	Connector 24"	BW	Bare Wire (Standard 36")	CON6	Connector 6"	CON24	Connector 24"	8 CONNECTOR/WIRE OUT <table><tr><td>CLS</td><td>Closed End (No feed)</td></tr></table> <table><tr><td>BW</td><td>Bare Wire (Standard 36")</td></tr><tr><td>CON6</td><td>Connector 6"</td></tr><tr><td>CON24</td><td>Connector 24"</td></tr></table>	CLS	Closed End (No feed)	BW	Bare Wire (Standard 36")	CON6	Connector 6"	CON24	Connector 24"																																																								
DF	Diffused																																																																																																
PR	Polar																																																																																																
FR	Frosted																																																																																																
SINGLE (Input only)																																																																																																	
S1	End Feed																																																																																																
S2	Bottom Feed																																																																																																
PASS THROUGH (Input/Output)																																																																																																	
P1	End Feed																																																																																																
P2	Bottom Feed																																																																																																
BW	Bare Wire (Standard 36")																																																																																																
CON6	Connector 6"																																																																																																
CON24	Connector 24"																																																																																																
BW	Bare Wire (Standard 36")																																																																																																
CON6	Connector 6"																																																																																																
CON24	Connector 24"																																																																																																
CLS	Closed End (No feed)																																																																																																
BW	Bare Wire (Standard 36")																																																																																																
CON6	Connector 6"																																																																																																
CON24	Connector 24"																																																																																																
9 WIRE COLOR <table><tr><td>WH</td><td>White</td></tr><tr><td>BK</td><td>Black</td></tr></table>	WH	White	BK	Black	10 WIRE TYPE <table><tr><td>CL2</td><td>Class 2</td></tr><tr><td>CL2P</td><td>Plenum Rated</td></tr></table> CL2P only available with bare wire leads (BW)	CL2	Class 2	CL2P	Plenum Rated	11 MOUNTING <table><tr><td>CC</td><td>Concealed Clip</td></tr><tr><td>MG</td><td>Magnet</td></tr></table>	CC	Concealed Clip	MG	Magnet	12 FINISH <table><tr><td>ST</td><td>Satin</td></tr><tr><td>BK</td><td>Black</td></tr><tr><td>WH</td><td>White</td></tr><tr><td>CU</td><td>Custom</td></tr></table> Custom finishes have longer lead times. Non-RAL 9003 whites custom.	ST	Satin	BK	Black	WH	White	CU	Custom	13 LENGTH (IN) Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".	14 EXACT/OPTIMAL <table><tr><td>O</td><td>Optimal Illumination</td></tr><tr><td>E</td><td>Exact Specified Length</td></tr></table> Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end.	O	Optimal Illumination	E	Exact Specified Length																																																																				
WH	White																																																																																																
BK	Black																																																																																																
CL2	Class 2																																																																																																
CL2P	Plenum Rated																																																																																																
CC	Concealed Clip																																																																																																
MG	Magnet																																																																																																
ST	Satin																																																																																																
BK	Black																																																																																																
WH	White																																																																																																
CU	Custom																																																																																																
O	Optimal Illumination																																																																																																
E	Exact Specified Length																																																																																																

For continuous mounting, consider bottom feed.

BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)


BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)




OPTI-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed


1 PRODUCT - DIMENSIONS




Profile



Profile with
concealed clip



Profile with magnet clip



Profile with magnet mount
clip and magnet mount
accessory

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 66000 for HE]
Tested with OP1SW-**-30-DRY-STD

	1.5 W/FT		1.5HE W/FT		3.0 W/FT		3.0HE W/FT		4.0 W/FT		5.0 W/FT		6.0HE W/FT		9.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
FR	132	98	150	98	226	98	288	98	286	98	372	98	625	98	917	98
PR	125	97	142	98	214	98	277	98	270	98	352	98	591	98	874	98
DF	110	97	126	98	188	97	245	98	238	98	309	98	524	98	776	98

TEMPERATURE RATINGS

DRY	Ambient Operating Temp - Surface	1.5 W/FT		1.5 W/FT HE		3.0 W/FT		3.0 W/FT HE		4.0 W/FT		5.0 W/FT		6.0 W/FT HE		9.0 HE	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
		-4°F	140°F	-4°F	145°F	-4°F	135°F	-4°F	135°F	-4°F	130°F	-4°F	125°F	-4°F	125°F	-4°F	105°F



OPTI-FLAT (01) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.


5W/ft

Frosted Lens




6 WIRE INPUT/OUTPUT


SINGLE (Input only)



PASS THROUGH (Input/Output)



CONFIGURATION OPTIONS

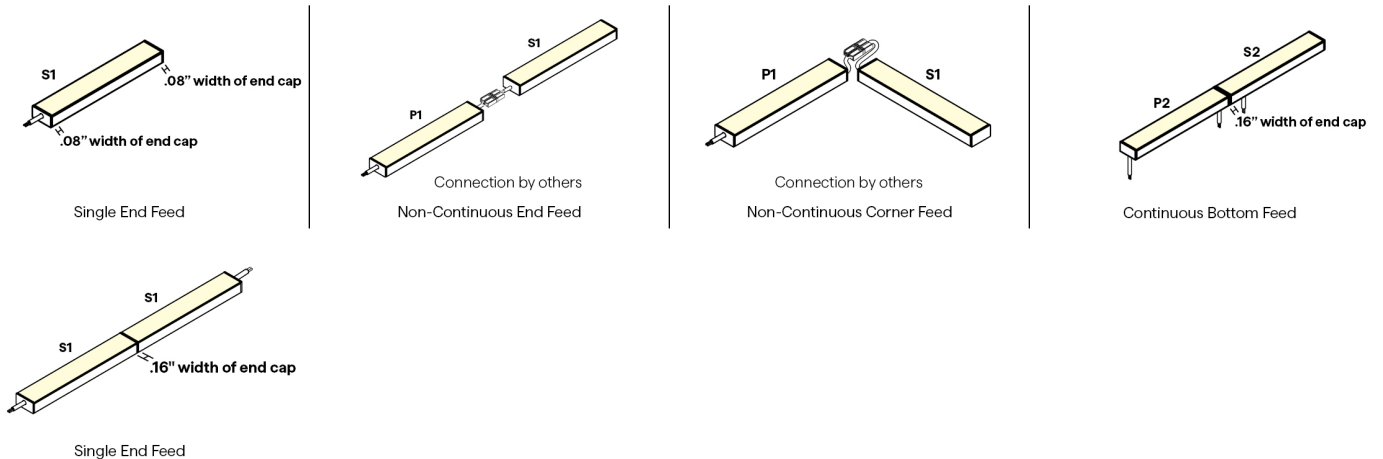




OPTI-FLAT (01) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

7 / 8 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out



Bare Wire 36"
22 AWG




6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

9 WIRE COLOR



11 MOUNTING

CC
(CC-01)



Concealed Clip

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'

To order separately use CC-01 (sold in pairs)

Each clips comes with a #4 x 5/8" Flat Head screw.

MG




Magnet Clip

One MG provided per foot

To order separately use MG-02

MMA-02




Magnet Mount
Accessory for MG-02

Sold separately, to order use MMA-02

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface


12 FINISH



Custom finishes require a longer lead time, consult factory

14 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

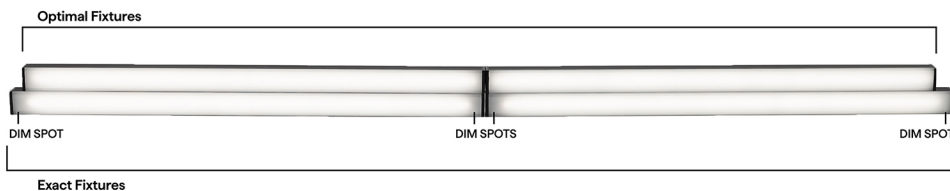




OPTI-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed





SW DRY DMP LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"


OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
				
12"	11.41"		11.66"	
13"	12.41"		12.66"	
14"	13.41"		13.66"	
15"	14.41"		14.66"	
16"	15.41"		15.66"	
17"	16.41"		16.66"	
18"	17.41"		17.66"	
19"	18.41"		18.66"	
20"	19.41"		19.66"	
21"	20.41"		20.66"	
22"	21.41"		21.66"	
23"	22.41"		22.66"	
24"	23.41"		23.66"	
36"	35.41"		35.66"	
48"	47.41"		47.66"	
60"	59.41"		59.66"	
72"	71.41"		71.66"	
84"	83.41"		83.66"	
96"	95.41"		95.66"	





SW WET LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
				
12"	11.56"		11.71"	
13"	12.56"		12.71"	
14"	13.56"		13.71"	
15"	14.56"		14.71"	
16"	15.56"		15.71"	
17"	16.56"		16.71"	
18"	17.56"		17.71"	
19"	18.56"		18.71"	
20"	19.56"		19.71"	
21"	20.56"		20.71"	
22"	21.56"		21.71"	
23"	22.56"		22.71"	
24"	23.56"		23.71"	
36"	35.56"		35.71"	
48"	47.56"		47.71"	
60"	59.56"		59.71"	
72"	71.56"		71.71"	
84"	83.56"		83.71"	
96"	95.56"		95.71"	




OPTI-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed





SW-HE DRY DMP LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2  End Feed	 Bottom Feed	P1 & P2  End Feed	 Bottom Feed
12"	10.41"		10.66"	
13"	12.41"		12.66"	
14"	12.41"		12.66"	
15"	14.41"		14.66"	
16"	14.41"		14.66"	
17"	16.41"		16.66"	
18"	16.41"		16.66"	
19"	18.41"		18.66"	
20"	18.41"		18.66"	
21"	20.41"		20.66"	
22"	20.41"		20.66"	
23"	22.41"		22.66"	
24"	22.41"		22.66"	
36"	34.41"		34.66"	
48"	46.41"		46.66"	
60"	58.41"		58.66"	
72"	70.41"		70.66"	
84"	82.41"		82.66"	
96"	94.41"		94.66"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	SW24/15-4.0
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle

















OPTI-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR
	SW24/15-4.0
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)
DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M  1.41" .71" Adjustable mounting bracket - Medium	HINGE - HMB-L  1.46" 1.29" Adjustable mounting bracket - Large	HINGE - HMB-XL  4" 1.46" Adjustable mounting bracket - XLarge	Q-PIVOT  .75" 1.03" Small mounting accessory	Q-ANGLE  2.23" 1.38" Adjustable mounting accessory	QUOVA-STANDARD  QUOVA Knife Edge	NJ-LARGE  J Mounting Bracket	NU-LARGE  U Mounting Bracket	SD-J-LARGE  J Mounting Bracket	BL-LARGE  Backwards L Mounting Bracket
BL-LARGE  Backwards L Mounting Bracket	NL-LARGE  L Mounting Bracket	SD-L-LARGE  L Mounting Bracket	MMA-02  .58" Magnet Mount Accessory of MG-02						



OPTI-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE WIRING ACCESSORIES

Q-mini-J  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	Q-mini-J5  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	CON120-EXT  10ft Con cable extender DRY/DMP/WET	CON FOUR-FER  Splits lead from one to four LED Con connectors DRY/DMP/WET	CON M - BARREL F  Male con to barrel cable adaptor DRY/DMP
--	---	--	--	---

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage