

MICRO 5 SLITE-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed

410.2 & 410.16 Closet Rated in 1.0-2.0W/ft





- MICRO 5 Series linear LED fixture designed to provide superior light performance and uniformity with discreet integration into drywall
- Two-piece mud-in fixture
- 48% smaller than QTL's standard size extrusion (MDIN)
- Delivers equivalent efficacy as standard size fixtures
- Once installed, its wings are covered with tape and compound to create a seamless look
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 2.0 watts or less per foot and ordered as a factory assembled fixture per NEC regulations
- Consult factory for field assembly options

Specify either factory assembled fixtures or field assembled extrusions and LEDs.

A LEDs will be installed into a complete fixture. Ideal for single fixtures. Avoids installers needing to handle the delicate 5mm LED.

OR

B Extrusions and LEDs will be shipped not installed. Ideal for long runs or light with no interruptions in LED up to Class 2 limitations. Due to the delicate nature of the 5mm LED, care must be taken in the installation process

A. Factory Assembled Option

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

A1 PRODUCT	A2 WATTS/ FT	A3 CCT	A4 RATED	A5 LENS
				DF

ADDITIONAL INFORMATION REQUIRED TO ORDER

A6 WIRE INPUT/ OUTPUT	A7 CONNECTOR/ WIRE IN	A8 CONNECTOR/ WIRE OUT	A9 WIRE COLOR	A10 WIRE TYPE	A11 MOUNTING	A12 FINISH	A13 LENGTH (IN)	A14 EXACT/ OPTIMAL
					SC			

Sample Part Number: **SLITE-01-SW-4.0-30-DRY-DF-S1-BW-CLS-WH-CL2-SC-ST-48"-E**

A1 PRODUCT

SLITE-01-SW
SLITE-01-SW-USA

Select USA option for BAA and BABA projects. Only DRY ratings apply. DMP options will require custom modifications, contact factory.

See following pages for compatible power supplies.

A2 WATTS/FT

1.0	1.0W/ft
2.0	2.0W/ft
4.0	4.0W/ft

A3 CCT

18	1800K
20	2000K
22	2200K
24	2400K
27	2700K
30	3000K
35	3500K
40	4000K

A4 RATED

DRY	IP20
DMP	IP54

A5 LENS

DF	Diffused

For representation of LED visibility, see Diode Visibility section on following pages.
For beam angles, see Photometric Performance section on following pages

A6 WIRE INPUT/ OUTPUT

SINGLE (Input only)

S1	End Feed
S2	Bottom Feed

For continuous mounting, consider bottom feed.

PASS THROUGH (Input/output)

P1	End Feed
P2	Bottom Feed

For continuous mounting, consider bottom feed.

A7 CONNECTOR/ WIRE IN

BW	Bare Wire (Standard 24")
BRL	Barrel
CON6	Connector 6"
CON24	Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

BW	Bare Wire (Standard 24")
BRL	Barrel
CON6	Connector 6"
CON24	Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

A8 CONNECTOR/ WIRE OUT

CLS	Closed End (No feed)

BW	Bare Wire (Standard 24")
BRL	Barrel
CON6	Connector 6"
CON24	Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

A9 WIRE COLOR

WH	White
BK	Black
N/A	For Barrel

A10 WIRE TYPE

CL2	Class 2
CL2P	Plenum Rated
N/A	For Barrel

CL2P only available with bare wire leads (BW)

A11 MOUNTING

SC	Screw

A12 FINISH

ST	Satin
CU	Custom

Custom finishes require a longer lead time, consult factory

A13 LENGTH (IN)

Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".

A14 EXACT/ OPTIMAL

E	Exact specified length
O	Optimal illumination

Exact fixtures are the exact length specified +0 – 1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.

5 year warranty | Warranty only valid with QTL power supplies | Field modifications must comply with QTL's installation methods otherwise warranty is null & void | Data subject to change, all data has +/- 5% tolerance | Title 24 – JA8-2019 Static White Strip: All wattages, CCT and IP

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

Specification subject to change. Rev-10-08-26

MICRO 5 SLITE-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed

B. Field Assembled Option

EXTRUSION ORDERING

B1	B2	B3	B4	B5	B6
PRODUCT	FINISH	MOUNTING	LENS	WIRE INPUT/ OUTPUT	EXTRUSION LENGTH (IN)
SLITE-01		SC	DF	NI	

LED STRIP ORDERING

B7	B8	B9	B10	B11	B12	B13	B14
V/ WATTS	RATED	CCT - LUMENS/ CRI	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	ILLUMINATED LENGTH
			BW	CLS		CL2	

EXTRUSION ORDERING

Sample Part Number: **SLITE-01-ST-SC-DF-NI-98.43"**

B1 PRODUCT

SLITE-01

B2 FINISH

ST Satin
CU Custom

Custom finishes require a longer lead time, consult factory

B3 MOUNTING

SC Screw

B4 LENS

DF Diffused

For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages

B5 WIRE INPUT/OUTPUT

NI Not Installed

B6 EXTRUSION LENGTH (IN)

1" increments from 1" - 98.43"
Extrusion Tolerance +0 -1/8".

LED STRIP ORDERING

Sample Part Number: **SW24-5MM/2.0-DRY-30-BW-CLS-WH-CL2-100"**

B7 V/WATTS

SW24-5MM/1.0
SW24-5MM/2.0
SW24-5MM/4.0

Wattage: 1.0W/ft, 2.0W/ft, 4.0W/ft
Voltage: 24VDC
See following pages for compatible power supplies.

B8 RATED

DRY IP20
DMP IP54

B9 CCT - LUMENS/CRI

18	1800K
20	2000K
22	2200K
24	2400K
27	2700K
30	3000K
35	3500K
40	4000K

B10 CONNECTOR/WIRE IN

BW Bare Wire (Standard 24")

B11 CONNECTOR/WIRE OUT

CLS Closed End (No feed)

B12 WIRE COLOR

WH White
BK Black

B13 WIRE TYPE

CL2 Class 2

B14 ILLUMINATED LENGTH

1.0W - 1"-1152" in 1" increments
2.0W - 1"-576" in 1" increments
4.0W - 1"-288" in 1" increments

Order LED length needed for each run. Lengths cannot exceed 96' at 1.0W, 48' at 2.0W, or 24' at 4.0W (Class 2). All lengths will have a 2' soldered lead wire attached. This product is not to be field-soldered.

REQUIRED ACCESSORY

UNIV-ROLLER




Roller tool used to lay MICRO 5 LED strips into extrusion housing

Included and required for all MICRO 5 field assembled options

To order additional, use UNIV-ROLLER


END CAPS

One pair of end caps is provided with each length of extrusion ordered.



Feed

To order separately, use SLITE-EC-ST



No Feed

To order separately, use SLITE-EC-ST


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-10-08-26


MICRO 5 SLITE-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed

A1 / B1 PRODUCT - DIMENSIONS




Installed mud-in profile with snap-in fixture



Mud-in profile



Snap-in fixture profile




Installed with screws

A2 / B9 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with SLITE-01-SW-**-30-DRY


	1.0 W/FT		2.0 W/FT		4.0 W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
DF	47	98	90	98	181	98

A5 / B4 DIODE VISIBILITY



PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



DF lens at 3000K

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-10-08-26

MICRO 5 SLITE-FLAT (01) STATIC WHITE


24VDC Linear Fixtures - Recessed

TEMPERATURE RATINGS

		1.0 W/FT		2.0 W/FT		4.0 W/FT	
		Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Recessed	-4°F	135°F	-4°F	130°F	-4°F	110°F
DMP	Ambient Operating Temp - Recessed	-4°F	135°F	-4°F	130°F	-4°F	110°F


A6 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed | Bottom Feed

PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP




End Feed | Bottom Feed


CONFIGURATION OPTIONS




Single End Feed




Non-Continuous End Feed

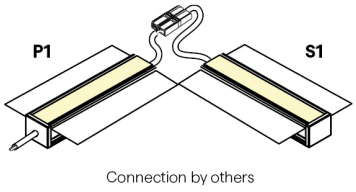

Non-Continuous Corner Feed



Continuous Bottom Feed



Continuous End to End Feed

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


MICRO 5 SLITE-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed

A7 / A8 / B10 / B11 CONNECTOR/WIRE – IN/OUT


Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out

BW




Bare Wire 24"
22 AWG

BRL



Barrel 6" - DRY/DMP I
22 AWG

CON6/CON24



6" or 24" Overall
Wire Connector I 22 AWG
IP67 Rated, UL Listed


A9 / B12 WIRE COLOR

White

Black

A11 / B3 MOUNTING

SC



Screw

#8 flat head screw

A12 / B2 FINISH

Satin


Custom finishes require a longer lead time, consult factory

A14 EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →

E/O Explained →

Exact fixtures are the exact length specified +0 – 1/8". Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

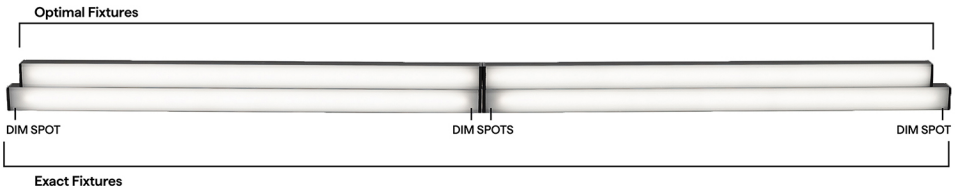

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting


Specification subject to change. Rev-10-08-26

MICRO 5 SLITE-FLAT (01) STATIC WHITE



24VDC Linear Fixtures - Recessed

SW DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture  End Feed
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

OPTIMAL LENGTH

Requested Nominal Length	S1  End Feed	S2  Bottom Feed	P1  End Feed	P2  Bottom Feed
12"	11.38"	11.38"	11.63"	11.63"
13"	12.38"	12.38"	12.63"	12.63"
14"	13.38"	13.38"	13.63"	13.63"
15"	14.38"	14.38"	14.63"	14.63"
16"	15.38"	15.38"	15.63"	15.63"
17"	16.38"	16.38"	16.63"	16.63"
18"	17.38"	17.38"	17.63"	17.63"
19"	18.38"	18.38"	18.63"	18.63"
20"	19.38"	19.38"	19.63"	19.63"
21"	20.38"	20.38"	20.63"	20.63"
22"	21.38"	21.38"	21.63"	21.63"
23"	22.38"	22.38"	22.63"	22.63"
24"	23.38"	23.38"	23.63"	23.63"
36"	35.38"	35.38"	35.63"	35.63"
48"	47.38"	47.38"	47.63"	47.63"
60"	59.38"	59.38"	59.63"	59.63"
72"	71.38"	71.38"	71.63"	71.63"
84"	83.38"	83.38"	83.63"	83.63"
96"	95.38"	95.38"	95.63"	95.63"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	MICRO 5-SW
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	Q-DIM QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

MICRO 5 SLITE-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed

DIMMING PROTOCOL	INDOOR
	MICRO 5-SW
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)
DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle


COMPATIBLE WIRING ACCESSORIES

Q-mini-J



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

BARREL-EXT



8ft barrel cable extender
DRY ONLY

BARREL FOUR-FER



Splits lead from one to four LED Barrel connector fixtures, DRY/DMP

CON120-EXT



10ft Con cable extender
DRY/DMP/WET

CON FOUR-FER



Splits lead from one to four LED Con connectors
DRY/DMP/WET

CON M - BARREL F



Male con to barrel cable adaptor
DRY/DMP

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

© 2026 QTL. All rights reserved

MICRO 5 SLITE-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting