





Q-CAP BOXA™ RGB

24VDC Flexible Fixtures

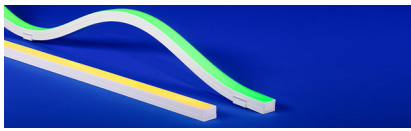

- Flexible encapsulated fixture
- Up/down bend
- 6" bend radius
- Interior and exterior rated (not including FC)
- Seven different mounting options
- Available in a seamless configuration for a continuous line of light
- Utilize clear endcaps for continuous runs
- Pair with ZALA's side bend to achieve compound curves
- standard Q-CAP flexible fixtures are not field cuttable
- IK10 impact rated

ORDERING PROCESS

A Specify Non-Field Cuttable Q-CAP

B (Optional) Specify field cuttable 4' piece - used to adjust total run length in the field (dry applications only)

A. NON-FIELD CUTTABLE Q-CAP

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

A1	A2	A3	A4	A5	A6
PRODUCT	MOUNTING	RATED	CCT	WATTAGE	LENS
BOXA-RGB			RGB	6.0	

ADDITIONAL INFORMATION REQUIRED TO ORDER

A7	A8	A9	A10	A11	A12
WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	END CAPS	LENGTH (IN)	EXACT/OPTIMAL

Sample Part Number: **BOXA-RGB-PPS-2-DRY-RGB-6.0-ENC/CL-S1-BW-N/A-CL-48"-E**

A1 PRODUCT BOXA-RGB See last page for compatible power supplies.	A2 MOUNTING RLC Rigid Lock Channel MC Magnetic Clip SGC Side Graze Channel PPS-2 PVC Clip PPS-96 PVC Channel PPS-LP-2 PVC Low Profile Clip PPS-LP-96 PVC Low Profile Channel WSC White Snug Clip BN-UD-SST-16' 16' BENDIT Up/Down Stainless Steel Channel BN-UD-SST-32' 32' BENDIT Up/Down Stainless Steel Channel BN-UD-WH-16' 16' BENDIT Up/Down White Stainless Channel BN-UD-WH-32' 32' BENDIT Up/Down White Stainless Channel White snug clip only for indirect cove use, not intended for hanging fixtures upside down. PPS mounting clip recommended for seamless applications	A3 RATED DRY IP20 WET IP67	A4 CCT RGB	
A5 WATTAGE 6.0 6.0W-SO SO: Standard Output	A6 LENS ENC/CL Encapsulated in Clear ENC/TL Encapsulated in Translucent For representation of LED visibility, see Diode Visibility section on following pages	A7 WIRE INPUT/OUTPUT SINGLE (Input only) S1 End Feed S2 Bottom Feed S3 Left Side Feed S4 Right Side Feed S5 Seamless Feed PASS THROUGH (Input/Output) P1 End Feed P2 Bottom Feed P3 Left Side Feed P4 Right Side Feed P5 Seamless Feed	A8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48) BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	A9 CONNECTOR/WIRE OUT N/A Closed End (No feed) BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)
A10 END CAPS CL Clear WH White N/A Not Applicable	A11 LENGTH (IN) Minimum length is 12", maximum length is 191" not including end caps. Contact us for lengths under 12". Available in 2" increments.	A12 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures are the exact length specified +0 - 1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.		

5 year warranty | Up/Down Bend | Data subject to change, all data has +/- 5% tolerance | Ambient or mounting surface must not be lower than -4°F or higher than 125°F | Patent # D872,931 S, D847,395 S, 10,619,828 B2 | Only FC fixtures are Field-Cuttable per installation instructions | Field Cuttable is not returnable or refundable after it has been cut



Q-CAP BOXA™ RGB

24VDC Flexible Fixtures

B. FIELD CUTTABLE Q-CAP

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

B1	B2	B3	B4	B5	B6
PRODUCT	MOUNTING	RATED	CCT	WATTAGE	LENS
BOXA-FC-RGB		DRY	RGB	6.0	

ADDITIONAL INFORMATION REQUIRED TO ORDER

B7	B8	B9	B10	B11	B12
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	END CAPS	LENGTH (IN)	EXACT/ OPTIMAL
		N/A	CL	48"	N/A

Sample Part Number: **BOXA-FC-RGB-PPS-2-DRY-RGB-6.0-ENC/CL-S1-BW-N/A-CL-48"-N/A**

B1

PRODUCT

BOXA-FC-RGB

See last page for compatible power supplies.

B2

MOUNTING

RLC

MC

SGC

PPS-2

PPS-96

PPS-LP-2

PPS-LP-96

WSC

BN-UD-SST-16'

BN-UD-SST-32'

BN-UD-WH-16'

BN-UD-WH-32'

Rigid Lock Channel

Magnetic Clip

Side Graze Channel

PVC Clip

PVC Channel

PVC Low Profile Clip

PVC Low Profile Channel

White Snug Clip

16' BENDIT Up/Down Stainless Steel Channel

32' BENDIT Up/Down Stainless Steel Channel

16' BENDIT Up/Down White Stainless Channel

32' BENDIT Up/Down White Stainless Channel

White snug clip only for indirect cove use, not intended for hanging fixtures upside down.

PPS mounting clip recommended for seamless applications

B3

RATED

DRY

IP20

B4

CCT

RGB

B5

WATTAGE

6.0

6.0W-SO

SO: Standard Output

B6

LENS

ENC/CL

ENC/TL

Encapsulated in Clear

Encapsulated in Translucent

For representation of LED visibility, see Diode Visibility section on following pages

B7

WIRE INPUT/OUTPUT

SINGLE (Input only)

S1

S2

S3

S4

S5

End Feed

Bottom Feed

Left Side Feed

Right Side Feed

Seamless Feed

B8

CONNECTOR/WIRE IN

BW

CON6

CON24

Bare Wire (Standard 24")

Connector 6"

Connector 24"

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

B9

CONNECTOR/WIRE OUT

N/A

Closed End (No feed)

B10

END CAPS

CL

Clear

Due to cutting, white endcaps are not available.

B11

LENGTH (IN)

48"

Nominal

Starting Run length is 48.475" for S1, S5 and 48.725" for S2, S3, S4

Each cut point subtracts from the Starting Run Length

6.0 has a 2" cut point

S2, S3, & S4 can be cut down to as little as 2.725"

S1 can be cut down to as little as 2.475"

S5 can be cut down to as little as 6.475"

B12

EXACT/OPTIMAL


N/A




Q-CAP BOXA™ RGB

24VDC Flexible Fixtures


1 PRODUCT - DIMENSIONS



Profile
(Standard)




Profile
(Seamless bare wire)



Profile
(CON6-24 barrel)


BEND RADIUS

Up/Down Bend




6" bending radius

FLEXIBILITY

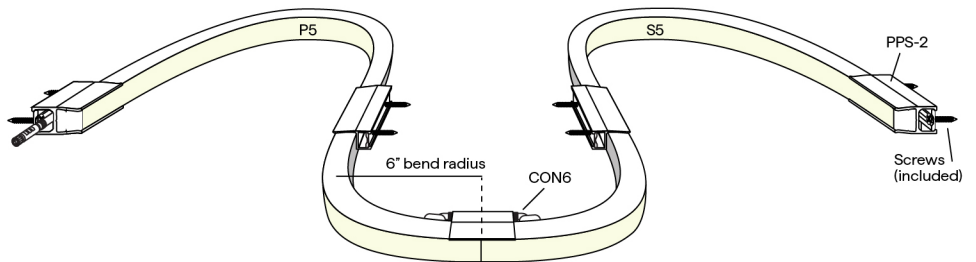

2 MOUNTING

WSC



White Snug Clip
Indirect uplight

To order separately use WSC

Each clip comes with a #6x5/8" flat screw

RLC



Rigid Lock Channel

To order separately use RLC

Each clip comes with a #6x5/8" flat screw

MC



Magnetic Clip
Cove use only

To order separately use MC

Each clip comes with a #6x5/8" flat screw

SGC




Side Graze Clip

To order separately use SGC

Each clip comes with a #6x5/8" flat screw

PPS-2



PVC Mounting Clip

To order separately use BOXA-PPS2



Q-CAP BOXA™ RGB

24VDC Flexible Fixtures

MOUNTING CONTINUED

PPS-96

96" straight linear run

To order separately use BOXA-PPS-96

Each clip comes with a #8" flat screw

PPS-LP-2

Low profile PVC Mounting Clip

To order separately use BOXA-PPS-LP-2

PPS-LP-96

Low profile PVC channel 96" straight linear run

To order separately use BOXA-PPS-LP-96

Each clip comes with a #8" flat screw

BN-UD

BENDIT Channel
Vertical Stainless Steel
Flexible Channel

Continuous mounting solution for flexible fixtures, 16' or 32' field cuttable lengths

To order separately use either STND-QCAP-BN-UD-SST-16', STND-QCAP-BN-UD-SST-32', STND-QCAP-BN-UD-WH-16', or STND-QCAP-BN-UD-WH-32'

64 #4-40 1/2" screws provided per 16'

4 / 5 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with BOXA-RGB-WSC-DRY

CCT	6.0W/FT Total Load				
	ENC/CL		ENC/TL		Circuit Wattage
	LM	Wavelength	LM	Wavelength	
Red	90	630	67	631	2.4
Green	174	522	127	522	1.9
Blue	52	470	37	470	1.7
All	294	-	216	-	6.0

6 DIODE VISIBILITY

ENC/CL - Clear encapsulation

ENC/TL - Translucent encapsulation

6 DIODE VISIBILITY

RGB

ENC/CL - Clear Encapsulation

ENC/TL - Translucent Encapsulation

BUG RATING

WATTAGE	B	U	G
6.0 (ALL CCTs)	B0	U1	G0

TEMPERATURE RATINGS

	6.0 W/FT	
	Min	Max
Ambient Operating Temp - Surface	-14°F	90°F
Storage Temp	-13°F	176°F
Installation Temp	50°F	100°F




Q-CAP BOXA™ RGB


24VDC Flexible Fixtures

7 WIRE INPUT/OUTPUT


SINGLE (Input only)

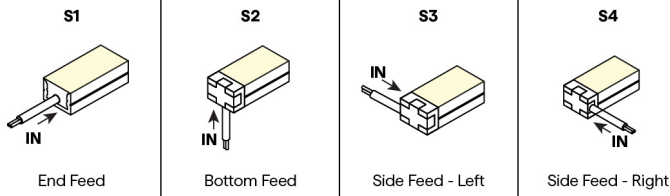


PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP

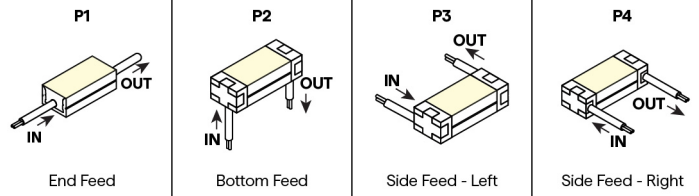


SEAMLESS SINGLE (Input only)




SEAMLESS PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP



CONFIGURATION OPTIONS

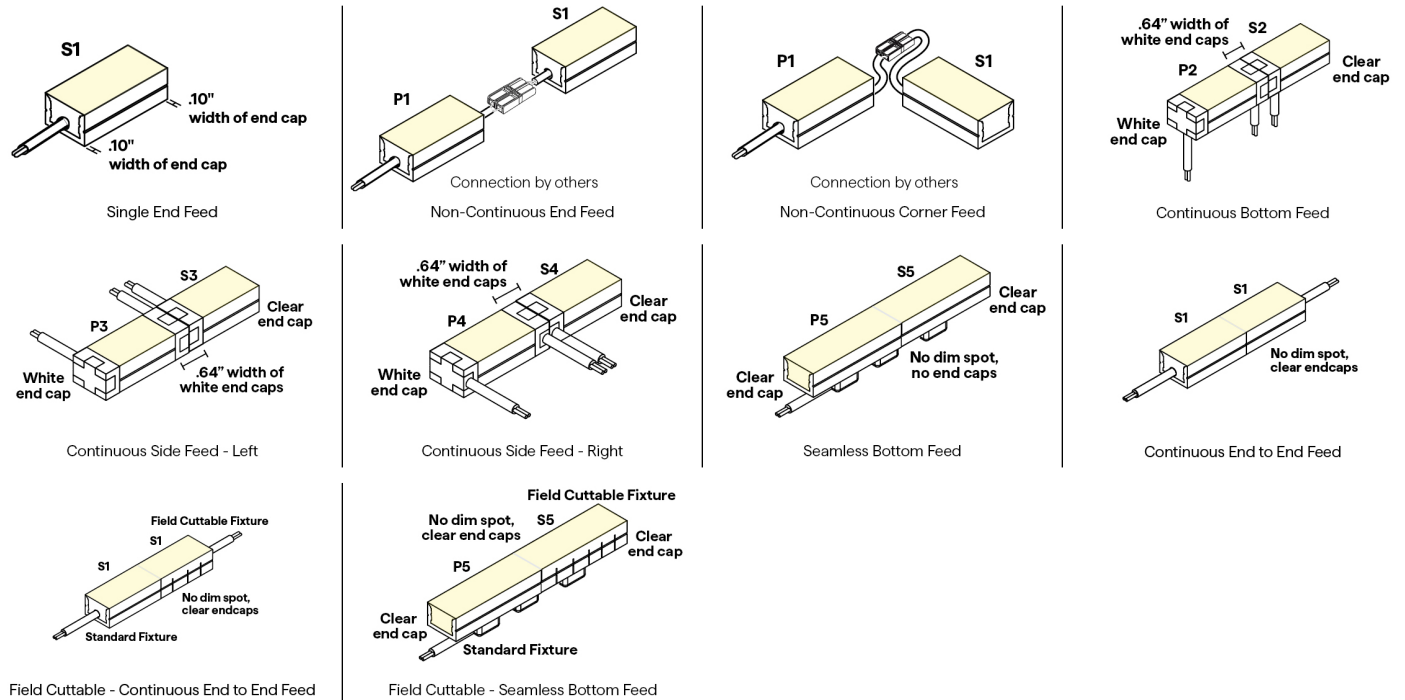

FIELD CUTTABLE MARKING

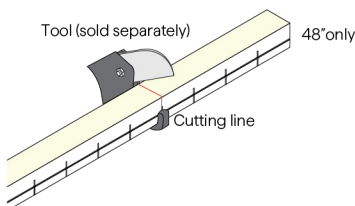

Field cuttable fixtures are sold in 4' increments and go at the end of a run, allowing for easy field adjustment



Note: Only FC fixtures are field cuttable — Do not attempt to cut non FC fixtures. Cut only on the marked cut lines. Only cut from non-feed end. Do not attempt to cut while power is on.




Q-CAP BOXA™ RGB

24VDC Flexible Fixtures

SEAMLESS


Shown with bare wire, connectors vary




Omnidirectional wireways
S5, P5

8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out, and WH for End Caps



10 END CAPS (NO FEED)




END CAPS (WITH FEED)



11 LENGTH - WIRING DETAIL

Available in 2" increments 12"-191"




12 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

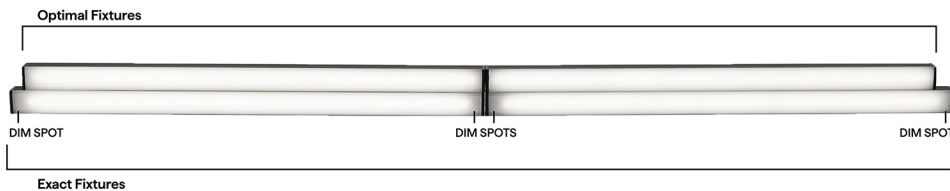



Q-CAP BOXA™ RGB

24VDC Flexible Fixtures











RGB LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture with S1 wireway
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1	S2	S2 & S3 & S4		P1	P2 & P3 & P4			S5 & P5	
	 End Feed	 Bottom Feed	 Side Feed - Left	 Side Feed - Right	 End Feed	 Bottom Feed	 Side Feed - Left	 Side Feed - Right	 Seamless Feed	 Seamless Feed
12"	10.58"		10.98"		10.95"		11.75"			10.2"
13"	12.58"		12.98"		12.95"		11.75"			12.2"
14"	12.58"		12.98"		12.95"		13.75"			12.2"
15"	14.58"		14.98"		14.95"		13.75"			14.2"
16"	14.58"		14.98"		14.95"		15.75"			14.2"
17"	16.58"		16.98"		16.95"		15.75"			16.2"
18"	16.58"		16.98"		16.95"		17.75"			16.2"
19"	18.58"		18.98"		18.95"		17.75"			18.2"
20"	18.58"		18.98"		18.95"		19.75"			18.2"
21"	20.58"		20.98"		20.95"		19.75"			20.2"
22"	20.58"		20.98"		20.95"		21.75"			20.2"
23"	22.58"		22.98"		22.95"		21.75"			22.2"
24"	22.58"		22.98"		22.95"		23.75"			22.2"
36"	34.58"		34.98"		34.95"		35.75"			34.2"
48"	46.58"		46.98"		46.95"		47.75"			46.2"
60"	58.58"		58.98"		58.95"		59.75"			58.2"
72"	70.58"		70.98"		70.95"		71.75"			70.2"
84"	82.58"		82.98"		82.95"		83.75"			82.2"
96"	94.58"		94.98"		94.95"		95.75"			94.2"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	RGB	RGB
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DMX QOM-eLED+PS-DALI-DT8 QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with RGB App Dongle	









DIMMING PROTOCOL	INDOOR	OUTDOOR
	RGB	RGB
DMX	QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8




Q-CAP BOXA™ RGB

24VDC Flexible Fixtures

COMPATIBLE MOUNTING ACCESSORIES

Q-ANGLE  Adjustable mounting accessory	NJ-LARGE  J Mounting Bracket	NU-LARGE  U Mounting Bracket	SD-J-LARGE  J Mounting Bracket	BL-LARGE  Backwards L Mounting Bracket	NL-LARGE  L Mounting Bracket	SD-L-LARGE  L Mounting Bracket	IQ-QCAP-UNV-CUTTER  QTL recommended FC Cutter
--	--	--	--	--	--	---	---

COMPATIBLE WIRING ACCESSORIES



UL Listed miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS



Read and write DMX addresses and adjust voltage