





# Q-CAP WALA RGB

24VDC Flexible Fixtures

## B. FIELD CUTTABLE Q-CAP

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

B1	B2	B3	B4	B5	B6
PRODUCT	MOUNTING	RATED	CCT	WATTAGE	LENS
WALA-FC-RGB		DRY	RGB	4.0	

ADDITIONAL INFORMATION REQUIRED TO ORDER

B7	B8	B9	B10	B11	B12
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	END CAPS	LENGTH (IN)	EXACT/ OPTIMAL
		N/A	CL	48"	N/A

Sample Part Number: WALA-FC-RGB-WSC-DRY-RGB-4.0-ENC/TL-S1-BW-N/A-CL-48"-N/A

B1

PRODUCT

WALA-FC-RGB

See last page for compatible power supplies.

B2

MOUNTING

PPS-2

PVC Clip

PPS-96

PVC Channel

PPS-LP-2

PVC Low Profile Clip

PPS-LP-96

PVC Low Profile Channel

WSC

White Snug Clip

BN-SB-SST-16'

16' BENDIT Side Stainless Steel Channel

BN-SB-SST-32'

32' BENDIT Side Stainless Steel Channel

BN-SB-WH-16'

16' BENDIT Side White Stainless Channel

BN-SB-WH-32'

32' BENDIT Side White Stainless Channel

White snug clip only for indirect cove use, not intended for hanging fixtures upside down.

PPS mounting clip recommended for seamless applications

B3

RATED

DRY

IP20

B4

CCT

RGB

B5

WATTAGE

4.0

4.0W-SO

SO: Standard Output

B6

LENS

ENC/CL

Encapsulated in Clear

ENC/TL

Encapsulated in Translucent

For representation of LED visibility, see Diode Visibility section on following pages

B7

WIRE INPUT/OUTPUT

SINGLE (Input only)

S1

End Feed

S5

Seamless Feed

S6

Seamless Feed

B8

CONNECTOR/WIRE IN

BW

Bare Wire (Standard 24")

CON6

Connector 6"

CON24

Connector 24"

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

B9

CONNECTOR/WIRE OUT

N/A

Closed End (No feed)

B10

END CAPS

CL

Clear

Due to cutting, white endcaps are not available.

B11

LENGTH (IN)

48"

Nominal

Starting Run length is 48.475" for S1, S5, & S6

Each cut point subtracts from the Starting Run Length

4.0 has a 2" cut point

S1 can be cut down to as little as 2.475"

S5 & S6 can be cut down to as little as 6.475"

B12

EXACT/OPTIMAL

N/A


Single ▶




# Q-CAP WALA RGB

24VDC Flexible Fixtures


## 1 PRODUCT - DIMENSIONS



Profile  
(Standard)




Profile  
(Seamless bare wire)



Profile  
(Seamless CON6-24)


## BEND RADIUS

Side Bend




6" bending radius

## FLEXIBILITY

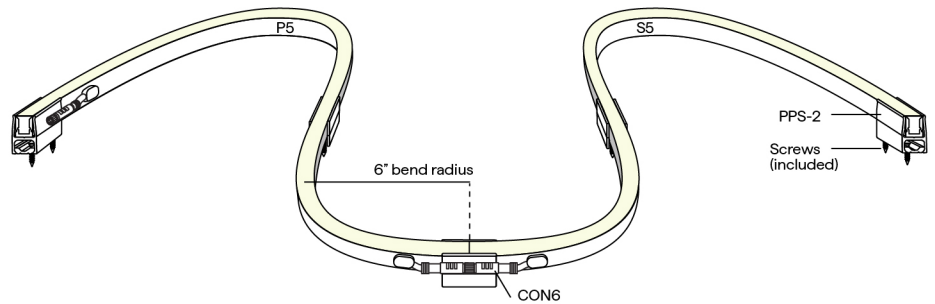

## 2 MOUNTING


WSC



White Snug Clip  
Indirect uplight

To order separately use WSC-02  
Each clip comes with a #4x5/8" flat screw


PPS-2



PVC Mounting Clip

To order separately use MICRO5-PPS2

PPS-96




96" straight linear run

To order separately use MICRO5-PPS-96

Each clip comes with a #6" flat screw


PPS-LP-2



Low profile PVC  
Mounting Clip

To order separately use MICRO5-PPS-LP-2

PPS-LP-96



Low profile PVC channel  
96" straight linear run

To order separately use MICRO5-PPS-LP-96

Each clip comes with a #6" flat screw




# Q-CAP WALA RGB

24VDC Flexible Fixtures

## MOUNTING CONTINUED

### BN-SB



BENDIT Channel  
Horizontal Stainless Steel  
Flexible Channel

Continuous mounting solution for  
flexible fixtures, 16' or 32' field  
cuttable lengths

To order separately use either  
MICRO5-BN-SB-SST-16', MICRO5-  
BN-SB-SST-32', MICRO5-BN-SB-  
WH-16', or MICRO5-BN-SB-  
WH-32'

64 #4-40 1/2" screws provided per  
16'

## 4 / 5 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]  
Tested with WALA-RGB-WSC-DRY

CCT	4.0W/FT Total Load			
	ENC/CL		ENC/TL	
	LM	Wavelength	LM	Wavelength
Red	32	629	29	630
Green	104	522	97	523
Blue	31	473	28	471
All	126	-	110	-

## 6 DIODE VISIBILITY



ENC/CL - Clear encapsulation

ENC/TL - Translucent encapsulation

## 6 DIODE VISIBILITY

### RGB

ENC/CL - Clear Encapsulation



ENC/TL - Translucent Encapsulation



## BUG RATING

WATTAGE	B	U	G
4.0 (ALL CCTs)	B0	U1	G0

## TEMPERATURE RATINGS

	4.0 W/FT	
	Min	Max
Ambient Operating Temp - Surface	-4°F	110°F
Storage Temp	-4°F	140°F
Install Temp	50°F	100°F




# Q-CAP WALA RGB

## 24VDC Flexible Fixtures


### 7 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed

PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP




End Feed

SEAMLESS SINGLE (Input only)




Seamless Feed




Seamless Feed

SEAMLESS PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP




Seamless Feed




Seamless Feed


### CONFIGURATION OPTIONS




Single End Feed




Connection by others  
Non-Continuous End Feed




Connection by others  
Non-Continuous Corner Feed

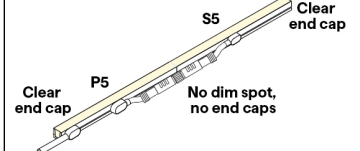


Seamless Side Feed



Continuous End to End Feed




Field Cuttable - Continuous End to End Feed



Field Cuttable - Seamless Side Feed

### FIELD CUTTABLE MARKING

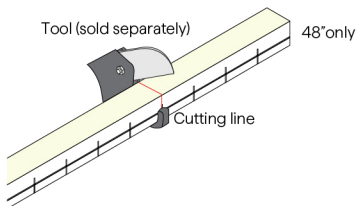

Field cuttable fixtures are sold in 4' increments and go at the end of a run, allowing for easy field adjustment



**Note:** Only FC fixtures are field cuttable — Do not attempt to cut non FC fixtures.  
Cut only on the marked cut lines. Only cut from non-feed end. Do not attempt to cut while power is on.




# Q-CAP WALA RGB

## 24VDC Flexible Fixtures

### SEAMLESS


Shown with bare wire, connectors vary




Omnidirectional  
Wireways  
S5, S6, P5, P6

### 8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out, and WH for End Caps



### 10 END CAPS (NO FEED)




### END CAPS (WITH FEED)



### 11 LENGTH - WIRING DETAIL

Available in 2 inch increments 12 inch-191 inch




### 12 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

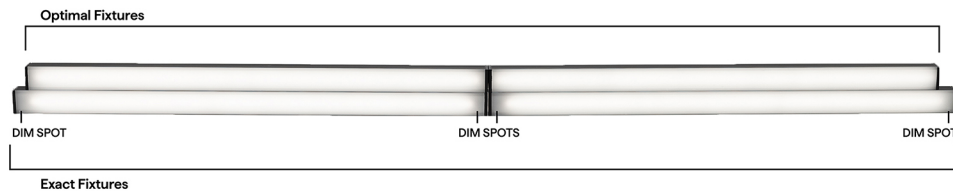



# Q-CAP WALA RGB

## 24VDC Flexible Fixtures





### RGB LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

#### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1	P1	S5 & P5	
				
12"	10.63"	11"	10.25"	
13"	12.63"	13"	12.25"	
14"	12.63"	13"	12.25"	
15"	14.63"	15"	14.25"	
16"	14.63"	15"	14.25"	
17"	16.63"	17"	16.25"	
18"	16.63"	17"	16.25"	
19"	18.63"	19"	18.25"	
20"	18.63"	19"	18.25"	
21"	20.63"	21"	20.25"	
22"	20.63"	21"	20.25"	
23"	22.63"	23"	22.25"	
24"	22.63"	23"	22.25"	
36"	34.63"	35"	34.25"	
48"	46.63"	47"	46.25"	
60"	58.63"	59"	58.25"	
72"	70.63"	71"	70.25"	
84"	82.63"	83"	82.25"	
96"	94.63"	95"	94.25"	

### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	MICRO 5-RGB	MICRO 5-RGB
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DMX QOM-eLED+PS-DALI-DT8 QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with RGB App Dongle	

DIMMING PROTOCOL	INDOOR	OUTDOOR
	MICRO 5-RGB	MICRO 5-RGB
DMX	QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8



# Q-CAP WALA RGB

## 24VDC Flexible Fixtures

### COMPATIBLE MOUNTING ACCESSORIES

QUOVA-MICRO




QUOVA Knife Edge

NJ-MICRO



J Mounting Bracket

BL-MICRO



Backwards L Mounting Bracket

NL-MICRO



L Mounting Bracket

SD-L-MICRO



L Mounting Bracket


IQ-QCAP-UNV-CUTTER



QTL recommended FC Cutter

### COMPATIBLE WIRING ACCESSORIES

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

### COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

### COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage