





Q-CAP KURV™-BK STATIC COLOR

24VDC Flexible Fixtures

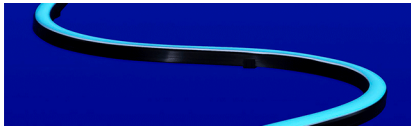

- Flexible encapsulated fixture with black housing
- Side bend
- 10" bend radius
- Interior and exterior rated
- Five different mounting options
- Available in a seamless configuration for a continuous line of light
- Utilize clear endcaps for continuous runs
- Q-CAP flexible fixtures are not field cuttable
- IK10 impact rated

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	MOUNTING	RATED	CCT	WATTAGE	LENS
KURV-BK-SC				5.0	

ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	END CAPS	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **KURV-BK-SC-PPS-2-DRY-G-5.0-ENC/TL-P1-BW-BW-N/A-48"-E**

1 PRODUCT KURV-BK-SC See last page for compatible power supplies.	2 MOUNTING PL Plastic Clip PPS-2 PVC Clip PPS-96 PVC Channel BN-SB-BK-16' 16' BENDIT Side Black Stainless Channel BN-SB-BK-32' 32' BENDIT Side Black Stainless Channel PPS mounting clip recommended for seamless applications	3 RATED DRY IP20 WET IP67	4 CCT A Amber B Blue G Green R Red	5 WATTAGE 5.0 5.0W-VHO VHO: Very High Output
6 LENS ENC/CL Encapsulated in Clear ENC/TL Encapsulated in Translucent For representation of LED visibility, see Diode Visibility section on following pages	7 WIRE INPUT/OUTPUT SINGLE (Input only) S1 End Feed S2 Bottom Feed S3 Left Side Feed S4 Right Side Feed S5 Seamless Feed S6 Seamless Feed PASS THROUGH (Input/Output) P1 End Feed P2 Bottom Feed P3 Left Side Feed P4 Right Side Feed P5 Seamless Feed P6 Seamless Feed		8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48) BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	9 CONNECTOR/WIRE OUT N/A Closed End (No feed) BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)
10 END CAPS CL Clear BK Black N/A Not Applicable	11 LENGTH (IN) Minimum length is 12", maximum length is 188" not including end caps. Contact us for lengths under 12". Available in 2" increments.		12 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end.	


5 year warranty | Field modifications are not covered under QTL warranty | Side Bend | Data subject to change, all data has +/- 5% tolerance | PPS-FT is to be cut at QTL to requested length | Not field cuttable




Q-CAP KURV™-BK STATIC COLOR

24VDC Flexible Fixtures


1 PRODUCT - DIMENSIONS




Profile
(Standard)



Profile
(Seamless bare wire)




Profile
(Seamless barrel)



Profile
(Seamless CON6-24)


BEND RADIUS

Side Bend




10" bending radius

FLEXIBILITY

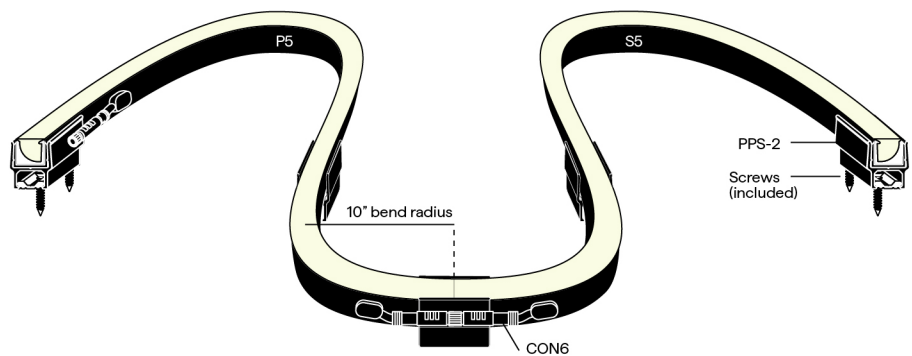

2 MOUNTING

PL




Plastic Clip
Black clip standard with
black extrusion

To order separately use PLC-03-BK

Each clip comes with a #4x5/8" flat screw


PPS-2



PVC Mounting Clip

To order separately use KURV-BK-PPS-2

PPS-96




96" straight linear run

To order separately use KURV-BK-PPS-96

Each clip comes with a #8" flat screw

BN-SB



BENDIT Channel
Horizontal Stainless Steel
Flexible Channel

Continuous mounting solution for flexible fixtures, 16' or 32' field cuttable lengths

To order separately use either STND-QCAP-BN-SB-W-BK-16', or STND-QCAP-BN-SB-W-BK-32'

64 #4-40 1/2" screws provided per 16'



Q-CAP KURV™-BK STATIC COLOR

24VDC Flexible Fixtures

4 / 5 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with KURV-BK-SC-PL-DRY

CCT	5.0W/FT			
	ENC/CL		ENC/TL	
	LM	Wavelength	LM	Wavelength
Red	90	632	85	633
Green	419	520	355	519
Blue	95	466	86	468
Amber	85	595	72	594

6 DIODE VISIBILITY

SC


ENC/CL - Clear Encapsulation
ENC/TL - Translucent Encapsulation

TEMPERATURE RATINGS


	5.0 W/FT	
	Min	Max
Ambient Operating Temp - Surface	-4°F	110°F
Storage Temp	-4°F	140°F
Installation Temp	50°F	100°F

7 WIRE INPUT/OUTPUT


SINGLE (Input only)

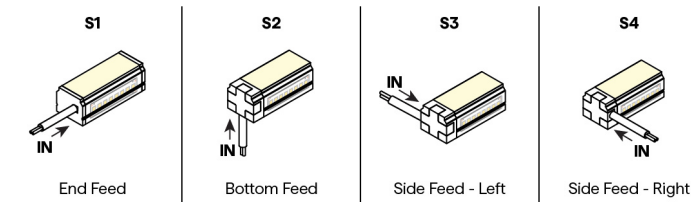


PASS THROUGH (Input/Output)

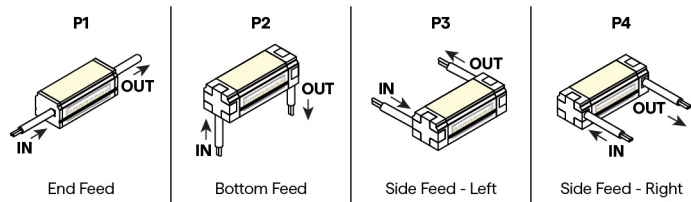

SEAMLESS SINGLE (Input only)



SEAMLESS PASS THROUGH (Input/Output)






Q-CAP KURV™-BK STATIC COLOR


24VDC Flexible Fixtures

CONFIGURATION OPTIONS

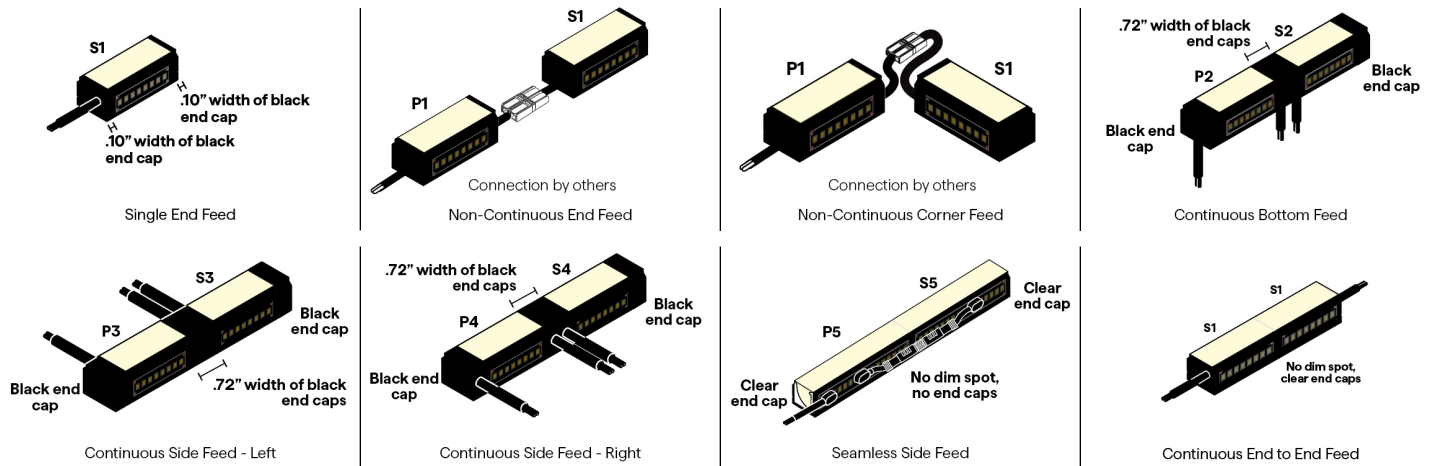

SEAMLESS


Shown with bare wire, connectors vary




Omnidirectional wireways
S5, S6, P5, P6

8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out, and BK for End Caps

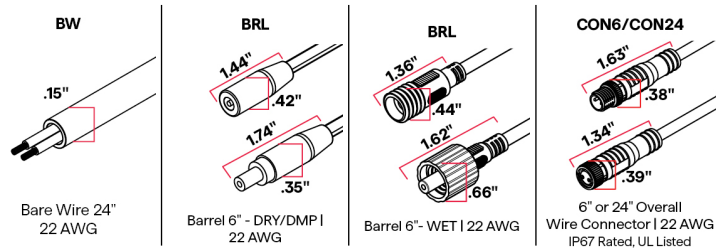

10 END CAPS (NO FEED)



END CAPS (WITH FEED)



11 LENGTH - WIRING DETAIL

Available in 2" increments 12"-188"





Q-CAP KURV™-BK STATIC COLOR


24VDC Flexible Fixtures

12 EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →

E/O Explained →

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

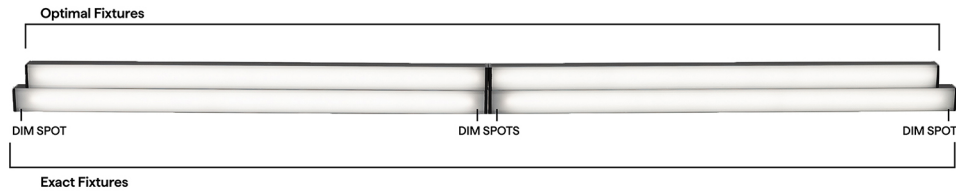

SC LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture with S1 wireway
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1		S2 & S3 & S4		P1		P2 & P3 & P4		S5 & S6 & P5 & P6	
	S1	S2	S3	S4	P1	P2	P3	P4	S5	P6
12"	10.65"		11.05"		10.9"		11.7"		10.4"	
13"	12.65"		11.05"		12.9"		11.7"		12.4"	
14"	12.65"		13.05"		12.9"		13.7"		12.4"	
15"	14.65"		13.05"		14.9"		13.7"		14.4"	
16"	14.65"		15.05"		14.9"		15.7"		14.4"	
17"	16.65"		15.05"		16.9"		15.7"		16.4"	
18"	16.65"		17.05"		16.9"		17.7"		16.4"	
19"	18.65"		17.05"		18.9"		17.7"		18.4"	
20"	18.65"		19.05"		18.9"		19.7"		18.4"	
21"	20.65"		19.05"		20.9"		19.7"		20.4"	
22"	20.65"		21.05"		20.9"		21.7"		20.4"	
23"	22.65"		21.05"		22.9"		21.7"		22.4"	
24"	22.65"		23.05"		22.9"		23.7"		22.4"	
36"	34.65"		35.05"		34.9"		35.7"		34.4"	
48"	46.65"		47.05"		46.9"		47.7"		46.4"	
60"	58.65"		59.05"		58.9"		59.7"		58.4"	
72"	70.65"		71.05"		70.9"		71.7"		70.4"	
84"	82.65"		83.05"		82.9"		83.7"		82.4"	
96"	94.65"		95.05"		94.9"		95.7"		94.4"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	SC	SC
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+RS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	










Q-CAP KURV™-BK STATIC COLOR







24VDC Flexible Fixtures

DIMMING PROTOCOL	INDOOR	OUTDOOR
	SC	SC
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

COMPATIBLE MOUNTING ACCESSORIES

Q-ANGLE  Adjustable mounting accessory	NJ-LARGE  J Mounting Bracket	NU-LARGE  U Mounting Bracket	SD-J-LARGE  J Mounting Bracket	BL-LARGE  Backwards L Mounting Bracket	NL-LARGE  L Mounting Bracket	SD-L-LARGE  L Mounting Bracket
--	--	--	--	--	--	---

COMPATIBLE WIRING ACCESSORIES

Q-mini-J  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	Q-mini-J5  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	BARREL-EXT  8ft barrel cable extender DRY ONLY	BARREL FOUR-FER  Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	CON120-EXT  10ft Con cable extender DRY/DMP/WET	CON FOUR-FER  Splits lead from one to four LED Con connectors DRY/DMP/WET
--	---	---	--	--	--



Q-CAP KURV™-BK STATIC COLOR

24VDC Flexible Fixtures

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage