




# UL-5

## 12V MR16 35W Halogen/8W LED Up Light



UL-5 Shown in Bronze Texture Powder Coat Finish (BZT)

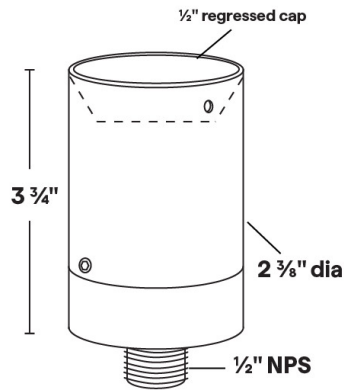

Dimensions: 2 3/8" dia. x 3 3/4"

- 1/2" regressed lens cap; holds up to three accessories
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 10" of 18ga. Teflon coated wire leads.
- Tempered clear glass lens.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 35W Halogen/8W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GU5.3 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for fixed uplighting applications. Can be utilized for ground mounted or surface mounted installations.

1	2	3
PRODUCT	MATERIAL	FINISH
UL-5	A	

Sample Part Number: **UL-5-A-BK**

1	2	3
PRODUCT	MATERIAL	FINISH
UL-5	A Aluminum	<div><div>BG</div>Beige</div> <div><div>BB</div>Black Bronze</div> <div><div>BK</div>Black</div> <div><div>BKT</div>Black Texture</div> <div><div>BZ</div>Bronze</div> <div><div>BZT</div>Bronze Texture</div> <div><div>SL</div>Silver</div> <div><div>WH</div>White</div>


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



# UL-5

12V MR16 35W Halogen/8W LED Up Light

## 1 PRODUCT - DIMENSIONS




## 2 MATERIAL



Aluminum

## 3 FINISH

Eight Standard TGIC Free powder coat finishes available

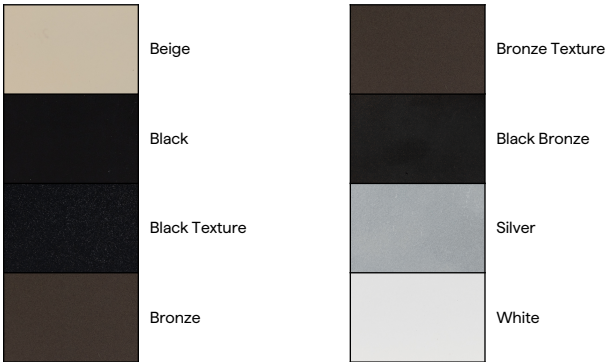

## ACCESSORIES - COLOR FILTERS

Holds up to three accessories. Wire Filter Holder is included for each color filter to hold filter in place.

BL	LB	PK	AM	MV	RD	GR	DA
Blue Glass Filter	Light Blue Glass Filter	Pink Glass Filter	Amber Glass Filter	Mercury Vapor Glass Filter	Red Glass Filter	Green Glass Filter	Dichroic Amber Glass Filter
To order separately use AY-2-MR16-BL	To order separately use AY-2-MR16-LB	To order separately use AY-2-MR16-PK	To order separately use AY-2-MR16-AM	To order separately use AY-2-MR16-MV	To order separately use AY-2-MR16-RD	To order separately use AY-2-MR16-GR	To order separately use AY-2-MR16-DA



UL-5

12V MR16 35W Halogen/8W LED Up Light

ACCESSORIES - LENS

Holds up to three accessories

SP



Spread Lens

To order separately  
use AY-1-MR16-1

LI



Linear Lens

To order separately  
use AY-1-MR16-2

SO



Softening Lens

To order separately  
use AY-1-MR16-3

LV



Louver Lens

To order separately  
use AY-1-MR16-4

WI



Wire Holder

To order separately  
use AY-1-MR16-5

FR



Frosted Lens

To order separately  
use AY-1-MR16-6

ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be ordered separately

MT-1



Ground Stake

MT-2



Adjustable Ground Stake

MT-6



Stainless Steel Ground Spike

MT-7



Stainless Steel Ground Spike

MT-8



Stainless Steel Ground Spike

LAMPS

MR16 Halogen or LED; GU5.3 Bi-Pin Porcelain  
Maximum wattage: 35W Halogen/8W LED

MR16



EMERY ALLEN

1.0W, 3.0W, 5.0W,  
7.0W

MR16



EMERY ALLEN

3W AMBER

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS