




WA-4

12V MR16 35W Halogen/8W LED Wall Mount

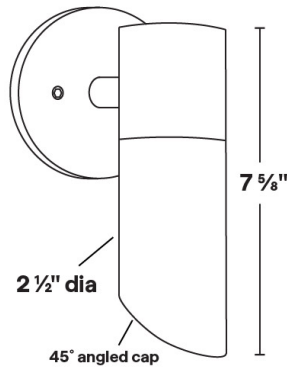

- 45° angled lens cap; holds up to three accessories
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 10" 18ga. Teflon coated wire leads.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 35W Halogen/8W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GU5.3 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for wall mounted fixed downlighting and uplighting applications.

WA-4 Shown in Bronze Texture Powder Coat Finish (BZT)

Dimensions: 2 1/2" dia. x 7 5/8"

1	2	3	4
PRODUCT	MATERIAL	MOUNTING PLATE	FINISH
WA-4	A		

Sample Part Number: **WA-4-A-1-BK**

1	PRODUCT	2	MATERIAL	3	MOUNTING PLATE	4	FINISH
	WA-4	A	Aluminum	1	4/0 Round Mounting Plate	BG	Beige
				2	4/0 Square Mounting Plate	BB	Black Bronze
				3	3/0 Round Mounting Plate	BK	Black
						BKT	Black Texture
						BZ	Bronze
						BZT	Bronze Texture
						SL	Silver
						WH	White


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



WA-4

12V MR16 35W Halogen/8W LED Wall Mount

1 PRODUCT - DIMENSIONS

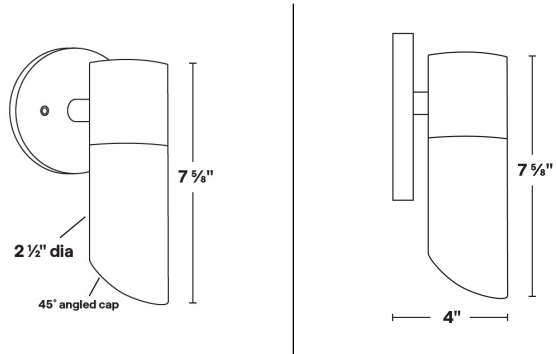

2 MATERIAL




3 MOUNTING PLATE

Three mounting plate options



4 FINISH

Eight Standard TGIC Free powder coat finishes

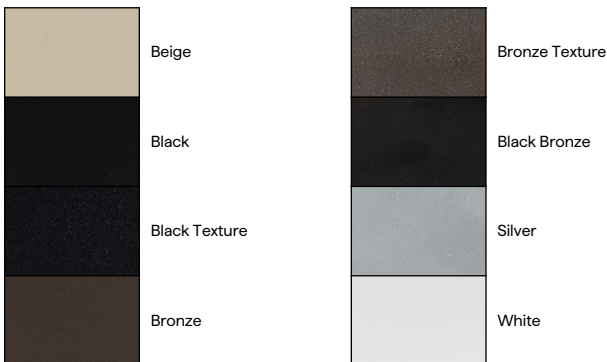











WA-4

12V MR16 35W Halogen/8W LED Wall Mount







ACCESSORIES - COLOR FILTERS

Holds up to three accessories. Wire Filter Holder is included for each color filter to hold filter in place.

BL  Blue Glass Filter To order separately use AY-2-MR-16-BL	LB  Light Blue Glass Filter To order separately use AY-2-MR-16-LB	PK  Pink Glass Filter To order separately use AY-2-MR-16-PK	AM  Amber Glass Filter To order separately use AY-2-MR-16-AM	MV  Mercury Vapor Glass Filter To order separately use AY-2-MR-16-MV	RD  Red Glass Filter To order separately use AY-2-MR-16-RD	GR  Green Glass Filter To order separately use AY-2-MR-16-GR	DA  Dichroic Amber Glass Filter To order separately use AY-2-MR16-DA
---	---	---	--	--	--	--	--



ACCESSORIES - LENS

Holds up to three accessories

SP  Spread Lens To order separately use AY-1-MR16-1	LI  Linear Lens To order separately use AY-1-MR16-2	SO  Softening Lens To order separately use AY-1-MR16-3	LV  Louver Lens To order separately use AY-1-MR16-4	WI  Wire Holder To order separately use AY-1-MR16-5	FR  Frosted Lens To order separately use AY-1-MR16-6
---	---	--	---	---	--

LAMPS

MR16 Halogen or LED; GU5.3 Bi Pin Porcelain
Maximum wattage: 35W Halogen/8 watt LED

MR16  EMERY ALLEN 1.0W, 3.0W, 5.0W, 7.0W	MR16  EMERY ALLEN 3W AMBER
--	---

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS