



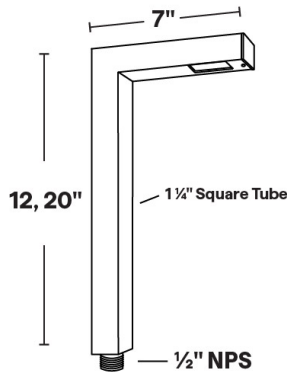

PL-15
12V GY6.35/G4 4W LED Path Light

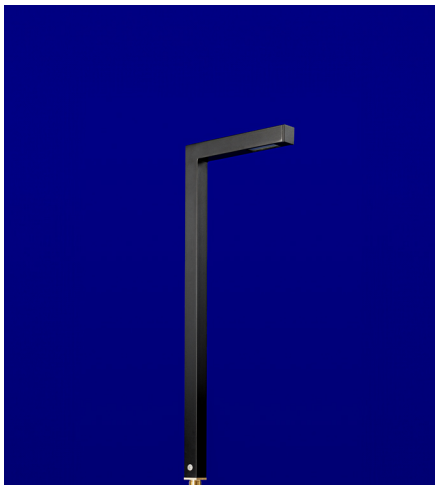

- 6061 Marine Grade Aluminum with eight polyester powder coat finishes.
- Stainless steel hardware.
- 6' of 18/2 low voltage cable supplied.
- Frosted, tempered glass lens.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Maximum Wattage: 4W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GY 6.35 Bi-Pin Porcelain (accepts G4 Lamps)
- Wet Listed
- Specification-grade, wet-location landscape luminaire for path or garden lighting applications.

PL-15 Shown in Dark Bronze Finish (DB) Dimensions: 1 1/4"x 1 1/4" tube, 12/20" Height x 7" Length

1	2	3	4
PRODUCT	MATERIAL	STEM HEIGHT	FINISH
PL-15			

Sample Part Number: PL-15-B-20-DB

1	2	3	4
PRODUCT	MATERIAL	STEM HEIGHT	FINISH
PL-15	<div>A Aluminum</div>	<div>12 12" Height</div> <div>20 20" Height</div>	<div>BG Beige</div> <div>BB Black Bronze</div> <div>BK Black</div> <div>BKT Black Texture</div> <div>BZ Bronze</div> <div>BZT Bronze Texture</div> <div>SL Silver</div> <div>WH White</div>
	<div>B Brass</div>	<div>12 12" Height</div> <div>20 20" Height</div>	<div>BG Beige</div> <div>BB Black Bronze</div> <div>BK Black</div> <div>BKT Black Texture</div> <div>BZ Bronze</div> <div>BZT Bronze Texture</div> <div>SL Silver</div> <div>WH White</div> <div>DB Dark Bronze</div> <div>NT Natural</div> <div>DB finish has longer lead time</div>

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




PL-15

12V GY6.35/G4 4W LED Path Light


1

PRODUCT - DIMENSIONS

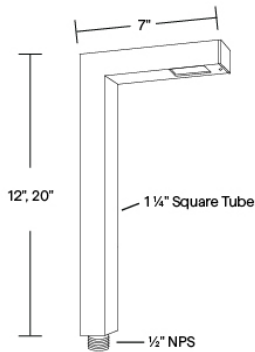

2

MATERIAL



4

FINISH

Eight Standard TGIC Free powder coat finishes and Two natural finish available





PL-15

12V GY6.35/G4 4W LED Path Light





ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be order separately

<div>MT-45</div> <div></div> <div>Ground Stake</div>	<div>MT-6</div> <div></div> <div>Stainless Steel Ground Spike</div>	<div>MT-7</div> <div></div> <div>Stainless Steel Ground Spike</div>	<div>MT-8</div> <div></div> <div>Stainless Steel Ground Spike</div>
---	--	--	--

LAMPS

G4 LED; GY-6.35 Bi Pin Porcelain (accepts G4 Lamps)
Maximum wattage: 4W LED

<div>G4</div> <div></div> <div>EMERY ALLEN 1.0W AMBER</div>	<div>G4</div> <div></div> <div>EMERY ALLEN 3.0W</div>	<div>G4</div> <div></div> <div>EMERY ALLEN 3.0W</div>	<div>G4</div> <div></div> <div>EMERY ALLEN 4.0W</div>
--	--	--	--

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS