




DL-29
120VAC PAR20 35W Halogen/11W LED
Down Light

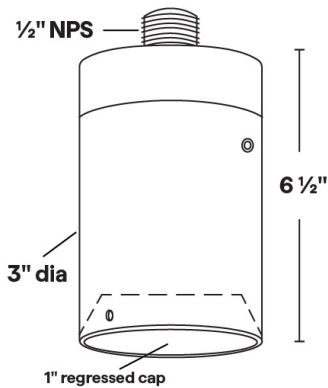

- 1" Regressed lens cap; holds up to one accessory
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 10" of 18ga. Teflon coated wire leads.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Maximum Wattage: 35W Halogen/8W LED
- Input Voltage: 120VAC
- Socket: Medium base ceramic
- Wet Listed
- Specification-grade, wet-location landscape luminaire for fixed downlighting applications. Can be utilized for pergola and other exterior installations.

DL-29 Shown in Bronze Texture Powder Coat Finish (BZT)

Dimensions: 3" dia. x 6 1/2"

1	2	3	4	5
PRODUCT	MATERIAL	MOUNTING PLATE	STEM LENGTH	FINISH
DL-29	A			

Sample Part Number: DL-29-A-1-0-BK

1	2	3	4	5
PRODUCT	MATERIAL	MOUNTING PLATE	STEM LENGTH	FINISH
DL-29	A Aluminum	1 MT-24 2 MT-25 3 MT-26 4 MT-27	0 No Stem 3 3" Stem Length 6 6" Stem Length 9 9" Stem Length 12 12" Stem Length 18 18" Stem Length	BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



DL-29

120VAC PAR20 35W Halogen/11W LED Down Light

1 PRODUCT - DIMENSIONS



2 MATERIAL



Aluminum

3 MOUNTING PLATE

1/2" NPS

1



Single Gang
Junction Box Cover

MT-24

2



4/0 Round
Mounting Plate

MT-25

3



4/0 Square
Mounting Plate

MT-26

4



3/0 Round
Mounting Plate

MT-27

4 FINISH

Eight Standard TGIC Free powder coat finishes



Beige

Black

Black Texture

Bronze



Bronze Texture

Black Bronze

Silver

White









DL-29

120VAC PAR20 35W Halogen/11W LED Down Light

ACCESSORIES - LENS

Holds up to one accessories

SP  Spread Lens To order separately use AY-1-PAR20-1	LI  Linear Lens To order separately use AY-1-PAR20-2	SO  Softening Lens To order separately use AY-1-PAR20-3	LV  Louver Lens To order separately use AY-1-PAR20-4	WI  Wire Holder To order separately use AY-1-PAR20-5	FR  Frosted Lens To order separately use AY-1-PAR20-6
--	--	---	--	--	---

LAMPS

PAR20 Halogen or LED; Medium base ceramic
Maximum wattage: 35W Halogen/11W LED

PAR20  SORAA VIVID 11.0W	PAR20  SORAA BRILLIANT 8.5W, 11.0W
---	---