




## PL-2

12V GY6.35/G4 35W Halogen/4W LED Path Light

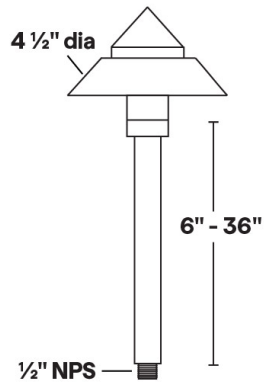

- 6061 Marine Grade Aluminum, available in eight standard TGIC Free powder coat finishes
- Copper, available in two finishes.
- Stainless steel hardware.
- Stems lengths of 6" - 36" available.
- Frosted or clear tempered glass lens, glued in.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 35W Halogen/4 watt LED
- Input Voltage: 12V (remote transformer required)
- Socket: GY 6.35 Bi-Pin Porcelain (accepts G4 Lamps)
- Wet Listed
- Specification-grade, wet-location landscape luminaire for path or garden lighting applications.

PL-2 Shown in Bronze Texture Powder Coat Finish (BZT)

Dimensions: 4 1/2" dia. shade

1	2	3	4	5	6
PRODUCT	MATERIAL	LENS STYLE	SHADE TOP	STEM LENGTH	FINISH
PL-2					

Sample Part Number: PL-2-A-F-D-12-BZT


1	2	3	4	5	6
PRODUCT	MATERIAL	LENS STYLE	SHADE TOP	STEM LENGTH	FINISH
PL-2	<b>A</b> Aluminum	<b>F</b> Frosted <b>C</b> Clear	<b>S</b> Standard <b>T</b> Tall <b>D</b> Dome <b>C</b> Cone	<b>0</b> None <b>6</b> 6" Stem Length <b>9</b> 9" Stem Length <b>12</b> 12" Stem Length <b>18</b> 18" Stem Length <b>24</b> 24" Stem Length <b>30</b> 30" Stem Length <b>36</b> 36" Stem Length	<b>BG</b> Beige <b>BB</b> Black Bronze <b>BK</b> Black <b>BKT</b> Black Texture <b>BZ</b> Bronze <b>BZT</b> Bronze Texture <b>SL</b> Silver <b>WH</b> White
	<b>B</b> Brass	<b>F</b> Frosted <b>C</b> Clear	<b>S</b> Standard <b>T</b> Tall <b>D</b> Dome <b>C</b> Cone	<b>0</b> None <b>6</b> 6" Stem Length <b>9</b> 9" Stem Length <b>12</b> 12" Stem Length <b>18</b> 18" Stem Length <b>24</b> 24" Stem Length <b>30</b> 30" Stem Length <b>36</b> 36" Stem Length	<b>BG</b> Beige <b>BB</b> Black Bronze <b>BK</b> Black <b>BKT</b> Black Texture <b>BZ</b> Bronze <b>BZT</b> Bronze Texture <b>SL</b> Silver <b>WH</b> White <b>DB</b> Dark Bronze <b>NT</b> Natural <small>DB finish has longer lead time</small>
	<b>C</b> Copper	<b>F</b> Frosted <b>C</b> Clear	<b>S</b> Standard <b>T</b> Tall <b>D</b> Dome <b>C</b> Cone	<b>0</b> None <b>6</b> 6" Stem Length <b>9</b> 9" Stem Length <b>12</b> 12" Stem Length <b>18</b> 18" Stem Length <b>24</b> 24" Stem Length <b>30</b> 30" Stem Length <b>36</b> 36" Stem Length	<b>DB</b> Dark Bronze <b>NT</b> Natural <small>DB finish has longer lead time</small>

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



**PL-2**  
12V GY6.35/G4 35W Halogen/4W LED Path Light

**1 PRODUCT - DIMENSIONS**




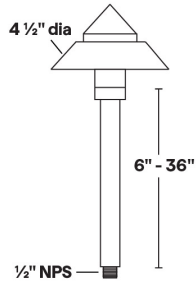


**2 MATERIAL**




**4 SHADE TOP**

4 Shade Top Options



**6 FINISH**

Eight Standard TGIC Free powder coat finishes and Two natural finish available

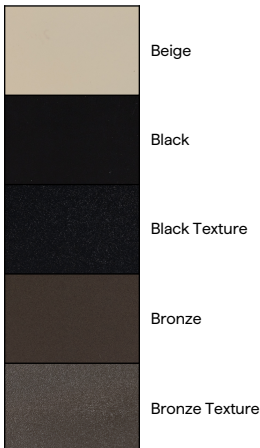



PL-2

12V GY6.35/G4 35W Halogen/4W LED Path Light

ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be order separately

MT-45



Ground Stake

MT-2



Adjustable Ground Stake

MT-6



Stainless Steel Ground Spike

MT-7



Stainless Steel Ground Spike

MT-8




Stainless Steel Ground Spike

LAMPS

G4 Halogen or LED; GY-6.35 Bi Pin Porcelain (accepts G4 Lamps)  
Maximum wattage: 35W Halogen/4W LED


G4



EMERY ALLEN

1.0W


G4



EMERY ALLEN

1.0W AMBER


G4



EMERY ALLEN

1.5W SINGLE POINT


G4



EMERY ALLEN

2.0W AMBER


G4



EMERY ALLEN

2.5W C.O.B.

G4



EMERY ALLEN

4.0W C.O.B.

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS