




RL-1

12V MR16 35W Halogen/8W LED Pendant Light

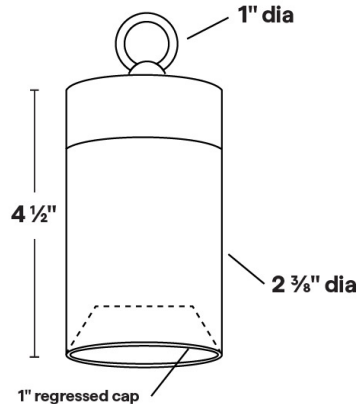

- 1" brass loop for mounting. Hanging hook included.
- 1" regressed cap lens or 45° angled cap lens; holds up to three accessories
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- SS Cable and lead wire options.
- Stainless steel hardware.
- 12" of 18 ga. Teflon wire leads"
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking, and water leaking into the lamp compartment.
- Maximum Wattage: 35W Halogen/8W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GU5.3 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for pendant mounted downlighting applications. Can be utilized for pergola, tree-mounted, and other exterior installations.

RL-1 Shown in Bronze Texture Powder Coat Finish (BZT)

Dimensions: 2 3/8" dia. x 4 1/2"

1	2	3	4	5	6
PRODUCT	MATERIAL	CAP STYLE	SS CABLE	18/ 2 WIRE	FINISH
RL-1	A				

Sample Part Number: **RL-1-A-S-O-0-BK**

1	2	3	4	5	6
PRODUCT	MATERIAL	CAP STYLE	SS CABLE	18/2 WIRE	FINISH
RL-1	A Aluminum	S Straight A 45 Degree Angle	0 No SS Cable 5 5' SS Cable 10 10' SS Cable 15 15' SS Cable 20 20' SS Cable 25 25' SS Cable 30 30' SS Cable	0 Standard 12" Wire 5 Extra 5' Wire 10 Extra 10' Wire 15 Extra 15' Wire 20 Extra 20' Wire 25 Extra 25' Wire 30 Extra 30' Wire 12" wire is standard. Length selected will be added to the standard 12" wire length.	BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



RL-1

12V MR16 35W Halogen/8W LED Pendant Light

1 PRODUCT - DIMENSIONS

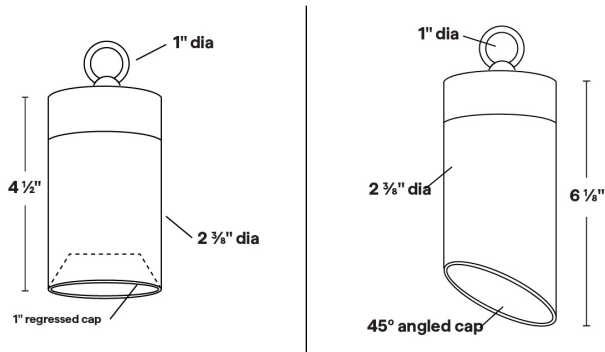


2 MATERIAL







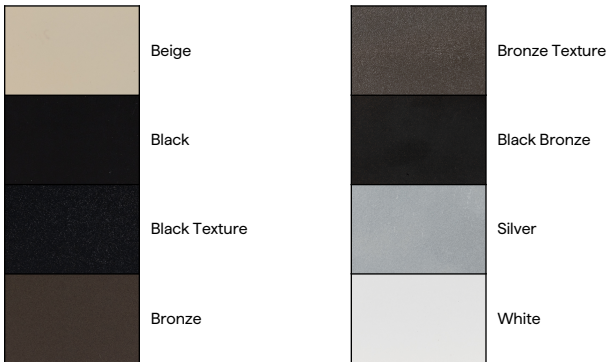



6 FINISH

Eight Standard TGIC Free powder coat finishes



ACCESSORIES - COLOR FILTERS

Holds up to three accessories Wire Filter Holder is included for each color filter to hold filter in place.

BL  Blue Glass Filter To order separately use AY-2-MR16-BL	LB  Light Blue Glass Filter To order separately use AY-2-MR16-LB	PK  Pink Glass Filter To order separately use AY-2-MR16-PK	AM  Amber Glass Filter To order separately use AY-2-MR16-AM	MV  Mercury Vapor Glass Filter To order separately use AY-2-MR16-MV	RD  Red Glass Filter To order separately use AY-2-MR16-RD	GR  Green Glass Filter To order separately use AY-2-MR16-GR	DA  Dichroic Amber Glass Filter To order separately use AY-2-MR16-DA
---	---	---	--	--	--	--	---









RL-1

12V MR16 35W Halogen/8W LED Pendant Light



ACCESSORIES - LENS

Holds up to three accessories

SP  Spread Lens To order separately use AY-1-MR16-1	LI  Linear Lens To order separately use AY-1-MR16-2	SO  Softening Lens To order separately use AY-1-MR16-3	LV  Louver Lens To order separately use AY-1-MR16-4	WI  Wire Holder To order separately use AY-1-MR16-5	FR  Frosted Lens To order separately use AY-1-MR16-6
---	---	--	---	---	--

LAMPS

MR16 Halogen or LED; GU5.3 Bi Pin Porcelain
Maximum wattage: 35W Halogen/8W LED

MR16  EMERY ALLEN 1.0W, 3.0W, 5.0W, 7.0W	MR16  EMERY ALLEN 3W AMBER
---	--

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS