





**NL-MICRO**  
MICRO 5 L BRACKET - ALUMINUM  
EXTRUSION

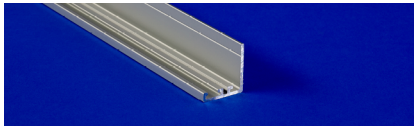

- L bracket with no reveal, creating the least amount of cutoff
- Surface mounts from the side, best for wall applications
- Mounts the MICRO 5 family of fixtures
- Paintable finish
- Intended for indoor use only
- Screw mounting track for field installation of fixtures
- Inline bracket slot for seamless run connections
- Durable anodized aluminum

1 PRODUCT	2 FINISH	3 LENGTH (IN)
NL-MICRO		


Sample Part Number: NL-MICRO-ST-48"

1 PRODUCT	2 FINISH	3 LENGTH (IN)
NL-MICRO	ST     Satin BK     Black	1" increments from 2" - 98.43" Tolerance +0.0"/-0.5" Light engine ordered separately


**1 PRODUCT - DIMENSIONS WITH RECOMMENDED PROFILES**




Profile



Profile with: ALTA-01



Profile with: ATOM-01



Profile with: TILT-01

Field modifications must comply with QTL's installation methods otherwise warranty is null & void | surface mount










# NL-MICRO

## MICRO 5 L BRACKET - ALUMINUM EXTRUSION

### 2 FINISH




### COMPATIBILITY CHART

	 ATOM	 TILT	 WALA	 WAVE	 NEXUS	 ALTA	 ANYBEND
Lens Notes	Works with: ATOM-01, ATOM-03	Works with: TILT-01				Works with: ALTA-01, ALTA-03	
SST-08 Stainless Steel Clip	✓	✓				✓	
WSC-02 White Snug Clip			✓	✓	✓		✓
VHB	✓	✓	✓	✓	✓		✓

### PHOTOMETRIC PERFORMANCE

Order separately | Tested with SW24/5.0 at 3000K

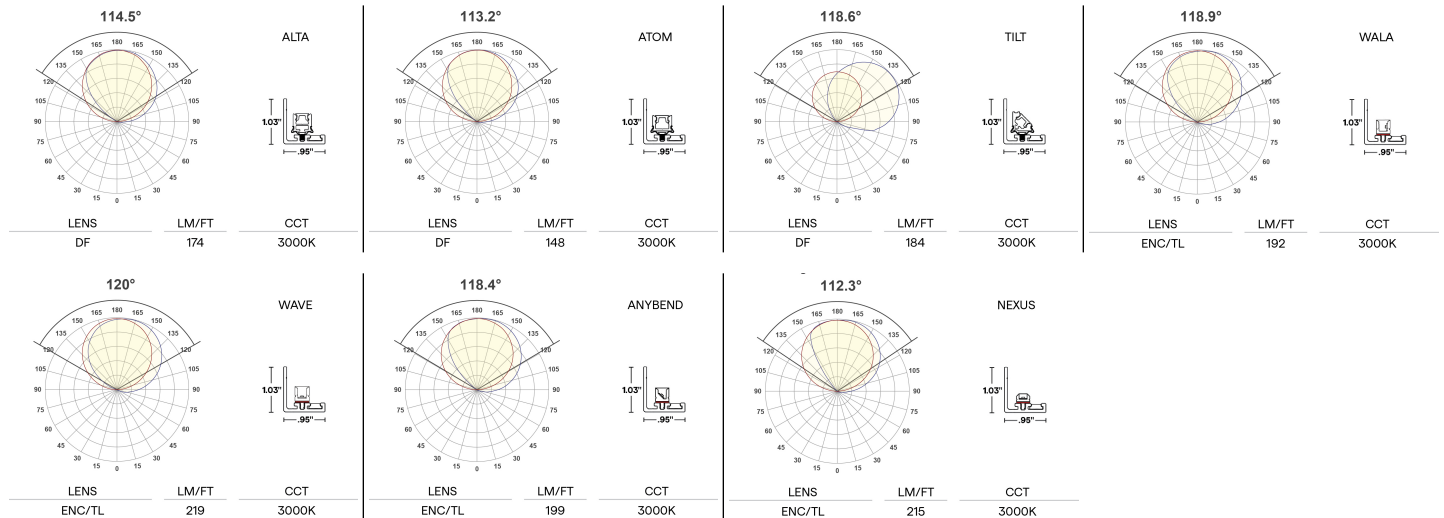




## NL-MICRO

### MICRO 5 L BRACKET - ALUMINUM EXTRUSION

---

#### JOINER/CONNECTORS



Inline Bracket

1 per length included

6/32" stainless steel, flat tip set  
screws, 1/8" long