




# SD-SW24/6.0

## LED Strips - Static White Standard Series



- Part of Standard collection
- Offered in dry
- Available in full reels or custom cut lengths
- For factory built fixture, contact factory

1	2	3	4	5	6	7	8
V/WATTS	RATED	CCT - LUMENS/CRI	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	ILLUMINATED LENGTH
SD-SW24/6.0	DRY						

Sample Part Number: SD-SW24/6.0-DRY-30-CON6-CON6-WH-CL2-48"

1

V/WATTS

SD-SW24/6.0

Voltage: 24VDC  
Wattage: 6.0W/ft  
See following  
pages for  
compatible power  
supplies.

2

RATED

DRY

IP20

3

CCT - LUMENS/CRI

22

2200K

407/97

24

2400K

487/97

27

2700K

493/98

30

3000K

522/97

35

3500K

548/97

40

4000K

593/97

4

CONNECTOR/WIRE IN

BW

BRL

CLS

CON6

CON24

Bare Wire (Standard 24")

Barrel

Closed End (No feed)

Connector 6"

Connector 24"

Connector/Wire In not needed to specify product.  
Typical selection is BW.  
BW: Standard length is 24"; Max length is 120".  
Request custom length by writing in part number  
next to BW (example: BW48)

5

CONNECTOR/WIRE OUT

BW

BRL

CLS

CON6

CON24

Bare Wire (Standard 24")

Barrel

Closed End (No feed)

Connector 6"

Connector 24"

Connector/Wire Out not needed to specify  
product. Typical selection is CLS or BW.  
BW: Standard length is 24"; Max length is 120".  
Request custom length by writing in part number  
next to BW (example: BW48)

6

WIRE COLOR

WH

BK

N/A

White

Black

Specify for Barrel

Barrel is white

7

WIRE TYPE

CL2

CL2P

N/A

Class 2

Class 2 Plenum Rated

Specify for Barrel

CL2P only available with bare wire leads (BW)

8

ILLUMINATED LENGTH

2"-192"

2" increments

Sold in reels of 25', 100', or 500'. For Class 2 low voltage, maximum 16'  
run length per 96W output.  
Reels do not include leads.

5 year warranty | Warranty only valid with QTL power supplies | Field modifications must comply with QTL's installation methods otherwise warranty is null & void | All data has +/- 5% tolerance | UL Listed | Title 24 - JA8-2016 Strips: DRY rated, 2700K and above



# SD-SW24/6.0

LED Strips - Static White Standard Series

## 3 CCT – LUMENS/CRI - DELIVERED LUMENS

[Calculated L70 = 58000 hrs]  
Tested with SD-SW24/6.0-DRY

CCT	Lumen/ft	Luminous Efficacy	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
2200K	407	69 Lm/W	97	84	96	99
2400K	487	84 Lm/W	97	88	95	103
2700K	493	86 Lm/W	98	95	96	102
3000K	522	91 Lm/W	97	92	94	102
3500K	548	95 Lm/W	97	87	94	99
4000K	593	103 Lm/W	97	93	93	101

## 4 / 5 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

**BW**

Bare Wire 24"  
Stranded 22 AWG

**BRL**

Barrel 6" - DRY/DMP |  
22 AWG

**CON6/CON24**

6" or 24" Overall  
Wire Connector | 22 AWG  
IP67 Rated, UL Listed


**CLS**

Not soldered

## 6 WIRE COLOR



## 8 ILLUMINATED LENGTH - DIMENSIONS

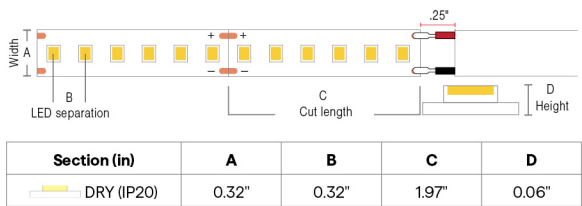

## COMPATIBLE EXTRUSIONS

	WIDE	ROND	TORQ	TRE3	LALO	TALO	ARKA	TELA	VEVE	FLUR	EMBD	LATO	MDIN	OPTI-FLAT	OPTI-OPTICS	THIN
DRY	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMP																
WET																



SD-SW24/6.0

LED Strips - Static White Standard Series

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	SD-SW24/6.0
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle



SD-SW24/6.0

LED Strips - Static White Standard Series

DIMMING PROTOCOL	INDOOR
	SD-SW24/6.0
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)
DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle

COMPATIBLE MOUNTING ACCESSORIES

















<div>QUOVA-MICRO</div> <div></div> <div>QUOVA Knife Edge</div>	<div>SHIELD A - Small</div> <div></div> <div>For standalone use</div>	<div>SHIELD B - Small</div> <div></div> <div>For use within extrusions</div>	<div>BL-GRAZER</div> <div></div> <div>Backwards L Mounting Bracket</div>	<div>BL-MICRO</div> <div></div> <div>Backwards L Mounting Bracket</div>	<div>BL-LARGE</div> <div></div> <div>Backwards L Mounting Bracket</div>	<div>SD-L-LARGE</div> <div></div> <div>L Mounting Bracket</div>	<div>SD-L-MEDIUM</div> <div></div> <div>L Mounting Bracket</div>	<div>SD-L-MICRO</div> <div></div> <div>L Mounting Bracket</div>	<div>SD-J-LARGE</div> <div></div> <div>J Mounting Bracket</div>
<div>iQ-STRAP</div> <div></div> <div>Plastic strap, Fits all LED strips</div>	<div>iQ-CLIP-SS10</div> <div></div> <div>Metal clip, Fits WET strip</div>	<div>iQ-CLIP-PL</div> <div></div> <div>Plastic clip, Fits WET strip</div>							



# SD-SW24/6.0

## LED Strips - Static White Standard Series

### COMPATIBLE WIRING ACCESSORIES

<b>SNP-LEAD</b>  Connects lead wire to LED strip DRY ONLY	<b>SNP-INLINE</b>  Connects LED strip to LED strip DRY ONLY	<b>CLP-LEAD</b>  Connects lead wire to LED strip DRY ONLY	<b>CLP-INLINE</b>  Connects LED strip to LED strip DRY ONLY	<b>Q-NECT-01-LEAD-24</b>  Connects LED board to 24" lead wire DRY ONLY	<b>Q-NECT-01-INLINE</b>  Connects two LED boards together DRY ONLY	<b>Q-NECT-SCREW-LEAD-12</b>  Connects LED board to 12" lead wire DRY ONLY	<b>Q-NECT-SCREW-JUMP-12</b>  Connects two LED boards together with 12" jumper; DRY ONLY	<b>Q-mini-J</b>  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	<b>Q-mini-J5</b>  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)
<b>INSTALLATION KITS</b>  LEAD or JUMP DRY and WET LED strip wiring Kits	<b>BARREL-EXT</b>  8ft barrel cable extender DRY ONLY	<b>BARREL FOUR-FER</b>  Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	<b>CON120-EXT</b>  10ft Con cable extender DRY/DMP/WET	<b>CON FOUR-FER</b>  Splits lead from one to four LED Con connectors DRY/DMP/WET	<b>CON M - BARREL F</b>  Male con to barrel cable adaptor DRY/DMP				

### COMPATIBLE CONTROL ACCESSORIES

**SCENE APP DONGLE**



Wi-Fi or Bluetooth Connectivity

### COMPATIBLE APPS

**NFC APP**



Read and write DMX addresses and adjust voltage