



LC-SW24/4.0

LED Strips - Static White LC Series



- One bin, three step static white LED strip with 487 lm/ft @ 3000K
- 8 diodes per 2" cut point
- Available in full reels or custom cut lengths
- Offered in CCTs of 2200K, 2400K, 2700K, 3000K, 3500K, and 4000K
- Compatible with QTL's standard extrusions
- For factory built fixture, contact factory

1 V/WATTS	2 RATED	3 CCT	4 CONNECTOR/WIRE IN	5 CONNECTOR/WIRE OUT	6 WIRE COLOR	7 WIRE TYPE	8 ILLUMINATED LENGTH
LC-SW24/4.0	DRY						

Sample Part Number: LC-SW24/4.0-DRY-30-CON6-CON6-WH-CL2-12"

<div>1</div> <div>V/WATTS</div> <div>LC-SW24/4.0</div> <div>Voltage: 24VDC Wattage: 4.0W/ft See following pages for compatible power supplies.</div>	<div>2</div> <div>RATED</div> <div>DRY IP20</div>	<div>3</div> <div>CCT</div> <div><div>222200K</div><div>242400K</div><div>272700K</div><div>303000K</div><div>353500K</div><div>404000K</div></div>	<div>4</div> <div>CONNECTOR/WIRE IN</div> <div><div>BWBRL</div><div>CLS</div><div>CON6</div><div>CON24</div><div>Bare Wire (Standard 24")</div><div>Barrel</div><div>Closed End (No feed)</div><div>Connector 6"</div><div>Connector 24"</div></div>	<div>5</div> <div>CONNECTOR/WIRE OUT</div> <div><div>BWBRL</div><div>CLS</div><div>CON6</div><div>CON24</div><div>Bare Wire (Standard 24")</div><div>Barrel</div><div>Closed End (No feed)</div><div>Connector 6"</div><div>Connector 24"</div></div>
<div>6</div> <div>WIRE COLOR</div> <div><div>WH</div><div>BK</div><div>N/A</div><div>White</div><div>Black</div><div>Specify for Barrel</div></div> <div>Barrel is white</div>	<div>7</div> <div>WIRE TYPE</div> <div><div>CL2</div><div>CL2P</div><div>N/A</div><div>Class 2</div><div>Class 2 Plenum Rated</div><div>Specify for Barrel</div></div> <div>CL2P only available with bare wire leads (BW)</div>	<div>8</div> <div>ILLUMINATED LENGTH</div> <div><div>DRY: 2"-288" in 2" increment</div><div>Dry version also available in reel lengths of 24' (Class 2) and 100'. Each reel will have a 2' soldered lead wire attached. Contact factory for larger reels.</div><div>For Class 2 low voltage, maximum reel size 48' run length per 96W output. Reel sizes 100' Reels do not include leads.</div></div>		

COMPATIBLE EXTRUSIONS

	WIDE	ROND	TORQ	TRE3	LALO	TALO	ARKA	TELA	VEVE	FLUR	EMBD	LATO	MDIN	OPTI-FLAT	OPTI-OPTICS	THIN
DRY	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMP																
WET																

5 year warranty | Warranty only valid with QTL power supplies | Field modifications must comply with QTL's installation methods otherwise warranty is null & void | All data has +/- 5% tolerance | UL Listed



LC-SW24/4.0

LED Strips - Static White LC Series

3 CCT – LUMENS/CRI - DELIVERED LUMENS

DRY

[Calculated L70 = 70000 hrs]
Tested with LC-SW24/4.0-DRY

CCT	Lumen/ft	Luminous Efficacy	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
2700K	403	93 Lm/W	97	79	94	101
3000K	487	115 Lm/W	95	76	93	100
3500K	474	116 Lm/W	97	86	93	100
4000K	520	121 Lm/W	95	79	91	99

4 / 5 CONNECTOR/WIRE – IN/OUT

BW

Bare Wire 24" Stranded 22 AWG

BRL

Barrel 6" - DRY/DMP I 22 AWG

CON6/CON24

6" or 24" Overall Wire Connector | 22 AWG IP67 Rated, UL Listed


CLS

Not soldered

6 WIRE COLOR



8 ILLUMINATED LENGTH - DIMENSIONS

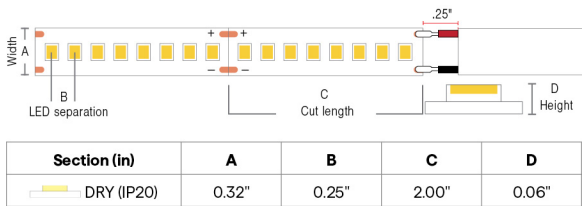



LC-SW24/4.0

LED Strips - Static White LC Series

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	LC-SW24/1.0-4.0
Dim to Black	Q6M-DC+CAP QTM-DC+CAP IQ-PH+QD1
0.1%	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle


















DIMMING PROTOCOL	INDOOR
	LC-SW24/1.0-4.0
Non-Dim	QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP IQ-PH+QD1
0-10V	QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)
DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle



LC-SW24/4.0

LED Strips - Static White LC Series

COMPATIBLE WIRING ACCESSORIES

SNP-LEAD  Connects lead wire to LED strip DRY ONLY	SNP-INLINE  Connects LED strip to LED strip DRY ONLY	CLP-LEAD  Connects lead wire to LED strip DRY ONLY	CLP-INLINE  Connects LED strip to LED strip DRY ONLY	Q-NECT-01-LEAD-24  Connects LED board to 24" lead wire DRY ONLY	Q-NECT-01-JUMP-3  Connects two LED boards together with 3" jumper, DRY ONLY	Q-NECT-01-INLINE  Connects two LED boards together DRY ONLY	Q-NECT-SCREW-LEAD-12  Connects LED board to 12" lead wire DRY ONLY	Q-NECT-SCREW-JUMP-12  Connects two LED boards together with 12" jumper, DRY ONLY	Q-mini-J  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)
INSTALLATION KITS  LEAD or JUMP DRY and WET LED strip wiring kits	BARREL-EXT  8ft barrel cable extender DRY ONLY	BARREL FOUR-FER  Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	CON120-EXT  10ft Con cable extender DRY/DMP/WET	CON FOUR-FER  Splits lead from one to four LED Con connectors DRY/DMP/WET	CON M - BARREL F  Male con to barrel cable adaptor DRY/DMP	Q-mini-J5  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)			