





VERS-ENCAPSULATED (06) STATIC COLOR

24VDC Linear Fixtures - Surface &
Recessed

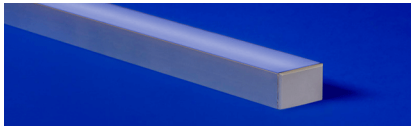

- Wet-rated VERSatile fixture encapsulated in polyurethane
- The polyurethane encapsulation provides optimal delivered lumens
- Features integrated metal endcaps
- Mounting options include a concealed or magnetic clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- QTL Red & Amber LED products are FWC certified, making them safe for turtles and other wildlife
- Consult factory for field assembly options
- Optional external louver accessory available in white or black for added glare control

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
PRODUCT	WATTS/FT	CCT	RATED	LENS	EXTERNAL LOUVER	WIRE IN/OUT	CONN/WIRE IN	CONN/WIRE OUT	END CAP IN	END CAP OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/OPTIMAL
VERS-06-SC	5.0		ENC													

Sample Part Number: **VERS-06-SC-5.0-G-ENC-ENC/TL-L1-BK-P1-BW-BW-STD-SRD-BK-CL2-CC-BK-48"-E**

1

PRODUCT

VERS-06-SC

See following pages for compatible power supplies.

2

WATTS/FT

5.0

5.0W/ft

3

CCT

A

Amber

B

Blue

G

Green

R

Red

4

RATED

ENC

IP67

5

LENS

ENC/CL

Encapsulated in Clear

ENC/TL

Encapsulated in Translucent

For representation of LED visibility, see Diode Visibility section on following pages.

For beam angles, see Photometric Performance section on following pages

6

EXTERNAL LOUVER

L1-WH

White Plastic

L1-BK

Black Plastic

L2-ST

Satin Anodized Aluminum

L2-BK

Black Anodized Aluminum

L2-WH

White Powder Coated Aluminum

N/A

No Louver

Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. Aluminum louvers come in maximum 98" lengths and will be cut to match fixture length. White and custom painted finishes are not compatible with L2 external louvers.

7

WIRE IN/OUT

S1

Single 1 - End Feed

S2

Single 2 - Bottom Feed

S3

Single 3 - Left Side Feed

S4

Single 4 - Right Side Feed

P1

Pass Through 1 - End Feed

P2

Pass Through 2 - Bottom Feed

P3

Pass Through 3 - Left Side Feed

P4

Pass Through 4 - Right Side Feed

P2, P3, P4 options not compatible with external louver

8

CONN/WIRE IN

BW

Bare Wire (Standard 36")

CON6

Connector 6"

CON24

Connector 24"

BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9

CONN/WIRE OUT

CLS

Closed End (No feed)

BW

Bare Wire (Standard 36")

CON6

Connector 6"

CON24

Connector 24"

BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

10

END CAP IN

STD

Standard

CL

Clear

STD - End cap matches fixture finish chosen

Select CL for continuous runs

11

END CAP OUT

STD

Standard

CL

Clear

STD - End cap matches fixture finish chosen

Select CL for continuous runs

12

WIRE COLOR

WH

White

BK

Black

13

WIRE TYPE

CL2

Class 2

CL2P

Plenum Rated

CL2P only available with bare wire leads (BW)

14

MOUNTING

CC

Concealed Clip

MG

Magnet

15

FINISH

ST

Satin

BK

Black

BZ

Bronze

WH

White

CU

Custom

White and custom finishes are incompatible with external louvers; custom finishes have longer lead times. Non-RAL 9003 whites custom.

16

LENGTH (IN)

Minimum length is 12", maximum length is 98" not including end caps.

Contact us for lengths under 12".

17

EXACT/OPTIMAL

O

Optimal Illumination

E

Exact Specified Length

Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




VERS-ENCAPSULATED (06) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed


1 PRODUCT - DIMENSIONS




Profile




Profile with concealed clip




Profile with magnetic clip



Profile with magnet mount clip & magnetic mount accessory



Profile with Louver




Profile with concealed clip and louver

2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with VERS-06-SC-5.0-**-ENC


	Red		Green		Blue		Amber	
	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength
ENC/CL	108	632	450	516	105	465	108	594
ENC/TL	100	632	395	515	98	465	98	594

5 DIODE VISIBILITY

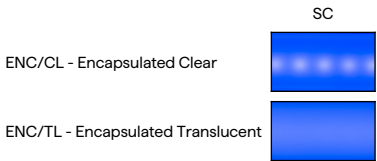

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

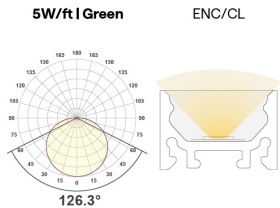





VERS-ENCAPSULATED (06) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed


6 EXTERNAL LOUVER

PLASTIC

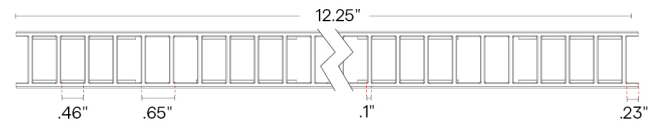



Lumen Multiplier

WH	BK
0.65	0.40




Profile with plastic louver

METAL

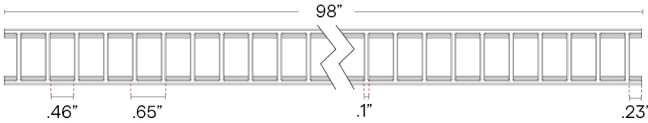

Lumen Multiplier

WH	BK	ST
0.67	0.40	0.62




Profile with metal louver

TEMPERATURE RATINGS


Ambient Operating Temp - Surface	5.0 W/FT	
	Min	Max
	-4°F	110°F

7 WIRE INPUT/OUTPUT

SINGLE (Input only)

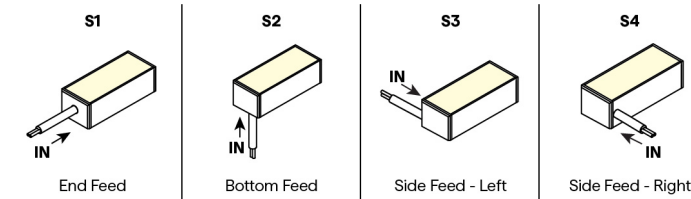

PASS THROUGH (Input/Output)

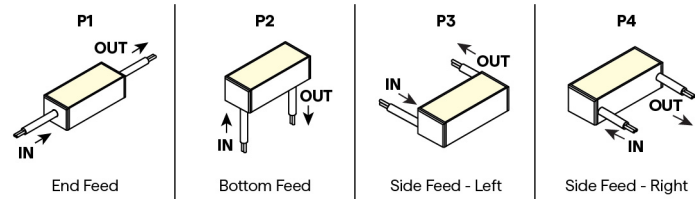




VERS-ENCAPSULATED (06) STATIC COLOR


24VDC Linear Fixtures - Surface & Recessed

CONFIGURATION OPTIONS

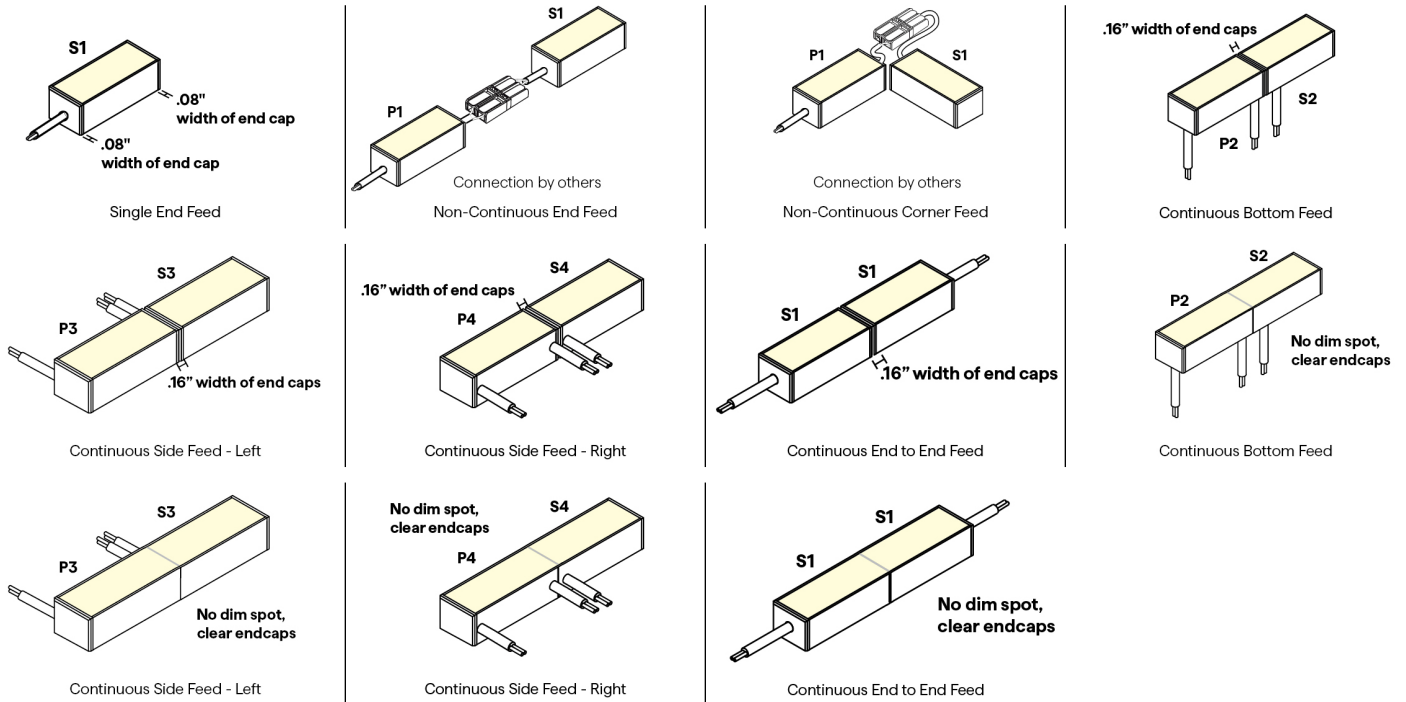


8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product.

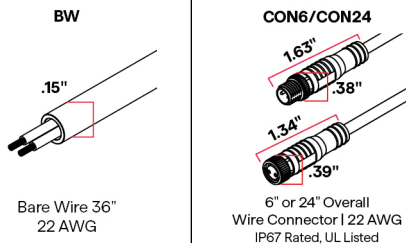

10 / 11 END CAP - IN/OUT

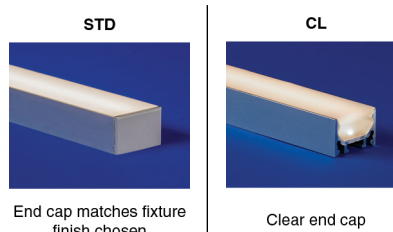

12 WIRE COLOR





VERS-ENCAPSULATED (06) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

14 MOUNTING

<p>CC (CC-01)</p>	<p>CC (CC-02)</p>	<p>MG</p>	<p>MMA-02</p>
<p>Concealed Clip</p> <p>2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'</p> <p>To order separately use CC-01 (sold in pairs)</p> <p>Each clips comes with a #4 x 5/8" Flat Head screw.</p>	<p>Louver Concealed Clip <small>Required if L1 or L2 Louver is selected</small></p> <p>2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'</p> <p>To order separately use CC-02 (sold in pairs)</p> <p>Each clips comes with a #4 x 5/8" Flat Head screw.</p>	<p>Magnet Clip</p> <p>One MG provided per foot</p> <p>To order separately use MG-02</p>	<p>Magnet Mount Accessory for MG-02</p> <p>Sold separately, to order use MMA-02</p> <p>Each clip comes with a #6 Flat Screw</p> <p>Required when mounting to a non-magnetic surface</p>

15 FINISH

	Satin
	Black
	Bronze
	White


Custom finishes require a longer lead time, consult factory

15 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

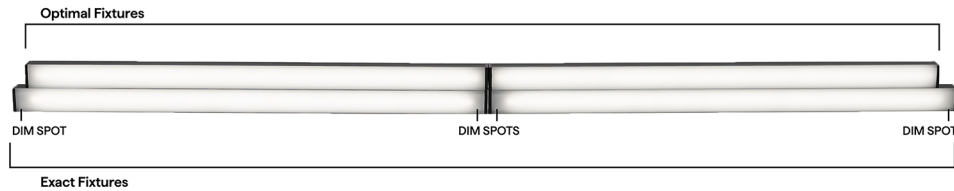




VERS-ENCAPSULATED (06) STATIC COLOR








24VDC Linear Fixtures - Surface & Recessed

SC ENC LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2  End Feed	S2  Bottom Feed	P1 & P2  End Feed	P2  Bottom Feed	S3 & S4  Side Feed - Left	S4  Side Feed - Right	P3 & P4  Side Feed - Left	P4  Side Feed - Right
12"	10.49"		10.74"		10.34"		10.44"	
13"	12.49"		12.74"		12.34"		12.44"	
14"	12.49"		12.74"		12.34"		12.44"	
15"	14.49"		14.74"		14.34"		14.44"	
16"	14.49"		14.74"		14.34"		14.44"	
17"	16.49"		16.74"		16.34"		16.44"	
18"	16.49"		16.74"		16.34"		16.44"	
19"	18.49"		18.74"		18.34"		18.44"	
20"	18.49"		18.74"		18.34"		18.44"	
21"	20.49"		20.74"		20.34"		20.44"	
22"	20.49"		20.74"		20.34"		20.44"	
23"	22.49"		22.74"		22.34"		22.44"	
24"	22.49"		22.74"		22.34"		22.44"	
36"	34.49"		34.74"		34.34"		34.44"	
48"	46.49"		46.74"		46.34"		46.44"	
60"	58.49"		58.74"		58.34"		58.44"	
72"	70.49"		70.74"		70.34"		70.44"	
84"	82.49"		82.74"		82.34"		82.44"	
96"	94.49"		94.74"		94.34"		94.44"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	SC	SC
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	














VERS-ENCAPSULATED (06) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR	OUTDOOR
	SC	SC
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

COMPATIBLE MOUNTING ACCESSORIES






HINGE - HMB-M  1.41" .71" Adjustable mounting bracket - Medium	HINGE - HMB-L  1.46" 1.29" Adjustable mounting bracket - Large	HINGE - HMB-XL  4" 1.46" Adjustable mounting bracket - XLarge	Q-PIVOT  .75" 1.03" Small mounting accessory	Q-ANGLE  2.23" 1.38" Adjustable mounting accessory	NJ-LARGE  J Mounting Bracket	NU-LARGE  U Mounting Bracket	SD-J-LARGE  J Mounting Bracket	BL-LARGE  Backwards L Mounting Bracket	NL-LARGE  L Mounting Bracket
SD-L-LARGE  L Mounting Bracket									



VERS-ENCAPSULATED (06) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE WIRING ACCESSORIES

<p>Q-mini-J</p>  <p>UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)</p>	<p>Q-mini-J5</p>  <p>UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)</p>	<p>CON120-EXT</p>  <p>10ft Con cable extender DRY/DMP/WET</p>	<p>CON FOUR-FER</p>  <p>Splits lead from one to four LED Con connectors DRY/DMP/WET</p>	<p>CON M - BARREL F</p>  <p>Male con to barrel cable adaptor DRY/DMP</p>
--	---	---	---	--

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage