




# VERS-ENCAPSULATED (06) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed



- Wet-rated VERSatile fixture encapsulated in polyurethane
- The polyurethane encapsulation provides optimal delivered lumens
- Features integrated metal endcaps
- Mounting options include a concealed or magnetic clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- Consult factory for field assembly options
- Optional external louver accessory available in white or black for added glare control

## INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	LENS	EXTERNAL LOUVER
			ENC		

## ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15	16	17
WIRE IN/ OUT	CONN/ WIRE IN	CONN/ WIRE OUT	END CAP IN	END CAP OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **VERS-06-DW-2.5HE-27/40-ENC-ENC/TL-L1-BK-P1-BW-BW-STD-STD-BK-CL2-CC-BK-48"-E**

<b>1 PRODUCT</b> <b>VERS-06-DW</b> <b>VERS-06-DW-USA</b>  Select USA option for BAA and BABA projects.  LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.	<b>2 WATTS/FT</b> <b>1.5HE</b> 1.5W/ft HE <b>2.5HE</b> 2.5W/ft HE	<b>3 CCT</b> <b>24/30</b> 2400K/3000K <b>27/40</b> 2700K/4000K	<b>4 RATED</b> <b>ENC</b> IP67	<b>5 LENS</b> <b>ENC/CL</b> Encapsulated in Clear <b>ENC/TL</b> Encapsulated in Translucent  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages	<b>6 EXTERNAL LOUVER</b> <b>L1-WH</b> White Plastic <b>L1-BK</b> Black Plastic <b>L2-ST</b> Satin Anodized Aluminum <b>L2-BK</b> Black Anodized Aluminum <b>L2-WH</b> White Powder Coated Aluminum <b>N/A</b> No Louver  Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. Aluminum louvers come in maximum 98" lengths and will be cut to match fixture length. White and custom painted finishes are not compatible with L2 external louvers.					
<b>7 WIRE IN/OUT</b>  <b>SINGLE (Input only)</b> <b>S1</b> End Feed <b>S2</b> Bottom Feed <b>S3</b> Left Side Feed <b>S4</b> Right Side Feed  <b>PASS THROUGH (Input/output)</b> <b>P1</b> End Feed <b>P2</b> Bottom Feed <b>P3</b> Left Side Feed <b>P4</b> Right Side Feed  P2, P3, P4 options not compatible with external louver	<b>8 CONN/WIRE IN</b> <b>BW</b> Bare Wire (Standard 36") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>9 CONN/WIRE OUT</b> <b>CLS</b> Closed End (No feed)	<b>10 END CAP IN</b> <b>STD</b> Standard <b>CL</b> Clear  STD - End cap matches fixture finish chosen Select CL for continuous runs	<b>11 END CAP OUT</b> <b>STD</b> Standard <b>CL</b> Clear  STD - End cap matches fixture finish chosen Select CL for continuous runs	<b>12 WIRE COLOR</b> <b>WH</b> White <b>BK</b> Black	<b>13 WIRE TYPE</b> <b>CL2</b> Class 2 <b>CL2P</b> Plenum Rated  CL2P only available with bare wire leads (BW)	<b>14 MOUNTING</b> <b>CC</b> Concealed Clip <b>MG</b> Magnet	<b>15 FINISH</b> <b>ST</b> Satin <b>BK</b> Black <b>BZ</b> Bronze <b>WH</b> White <b>CU</b> Custom  White and custom finishes are incompatible with external louvers; custom finishes have longer lead times. Non-RAL 9003 whites custom.	<b>16 LENGTH (IN)</b>  Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>17 EXACT/OPTIMAL</b> <b>O</b> Optimal Illumination <b>E</b> Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




# VERS-ENCAPSULATED (06) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed


## 1 PRODUCT - DIMENSIONS




Profile




Profile with concealed clip




Profile with magnetic clip



Profile with magnet mount clip & magnetic mount accessory



Profile with Louver



Profile with concealed clip and louver

## 2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]  
Tested with VERS-06-DW-\*\*-\*\*-ENC


	1.5HE W/FT		2.5HE W/FT	
	LM/FT	CRI	LM/FT	CRI
ENC/CL	114	97	169	97
ENC/TL	96	97	141	96

## 5 DIODE VISIBILITY



## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.









# VERS-ENCAPSULATED (06) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed





## 6 EXTERNAL LOUVER

PLASTIC

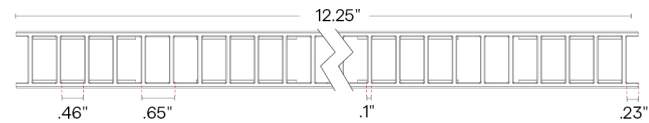

Profile with plastic louver

METAL

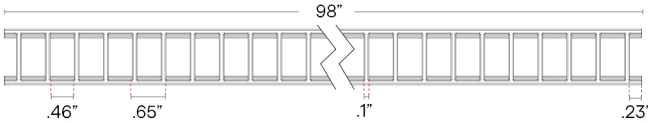


Profile with metal louver

## TEMPERATURE RATINGS


	DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT	
	QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
	Min	Max	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	105°F

## 7 WIRE INPUT/OUTPUT

SINGLE (Input only)

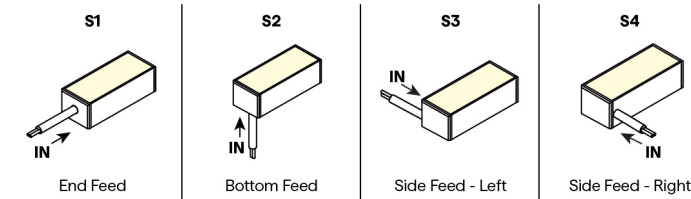

PASS THROUGH (Input/Output)

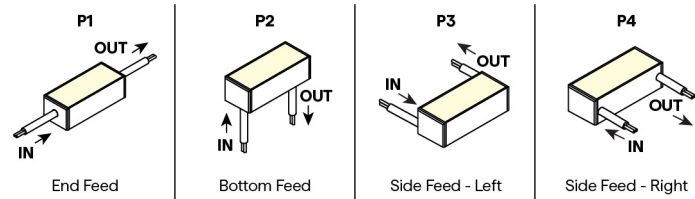




# VERS-ENCAPSULATED (06) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

## CONFIGURATION OPTIONS

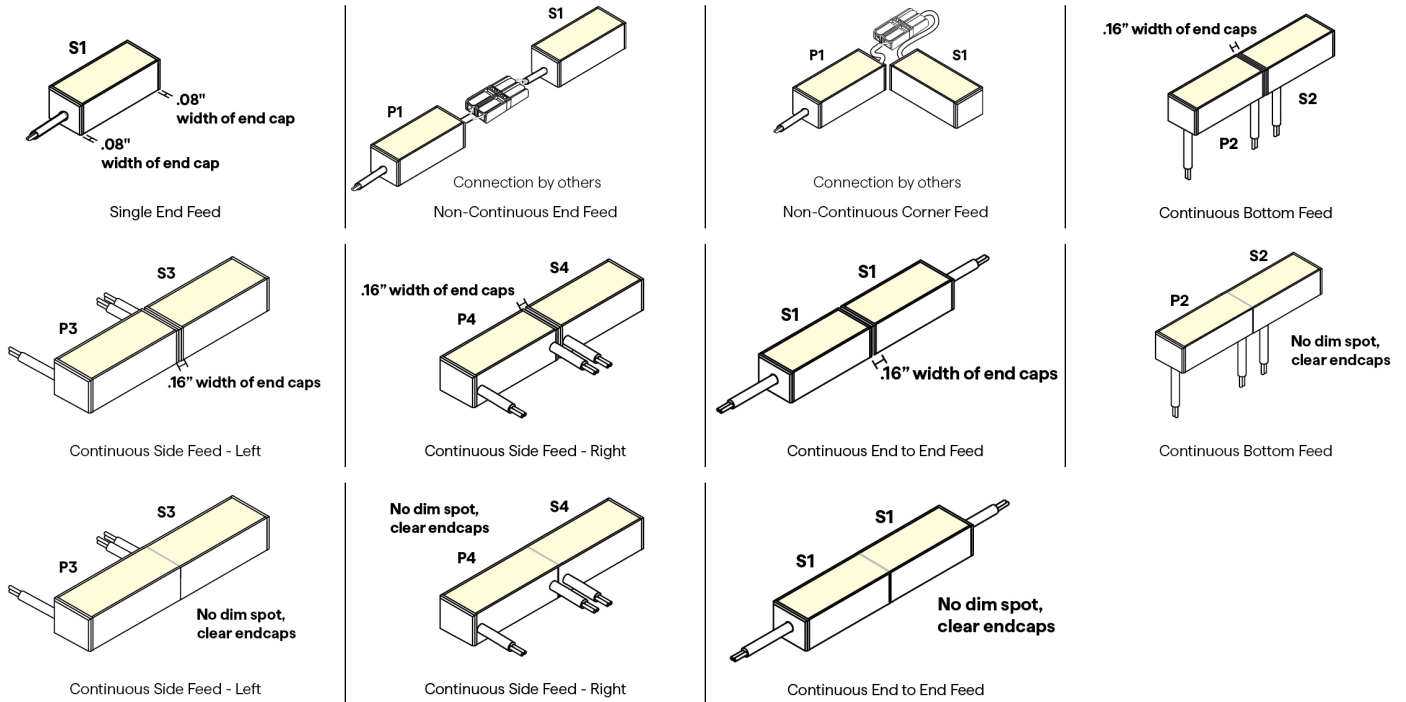


## 8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product.

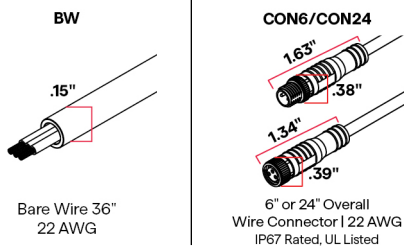

## 10 / 11 END CAP - IN/OUT

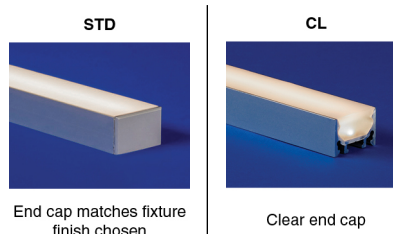

## 12 WIRE COLOR













# VERS-ENCAPSULATED (06) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 14 MOUNTING

<p><b>CC</b> (CC-01)</p>  <p>Concealed Clip</p> <p>2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'</p> <p>To order separately use CC-01 (sold in pairs)</p> <p>Each clips comes with a #4 x 5/8" Flat Head screw.</p>	<p><b>CC</b> (CC-02)</p>  <p>Louver Concealed Clip <small>Required if L1 or L2 Louver is selected</small></p> <p>2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'</p> <p>To order separately use CC-02 (sold in pairs)</p> <p>Each clips comes with a #4 x 5/8" Flat Head screw.</p>	<p><b>MG</b></p>  <p>Magnet Clip</p> <p>One MG provided per foot</p> <p>To order separately use MG-02</p>	<p><b>MMA-02</b></p>  <p>Magnet Mount Accessory for MG-02</p> <p>Sold separately, to order use MMA-02</p> <p>Each clip comes with a #6 Flat Screw</p> <p>Required when mounting to a non-magnetic surface</p>
--	--	--	--

## 15 FINISH

	Satin
	Black
	Bronze
	White


Custom finishes require a longer lead time, consult factory

## 15 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

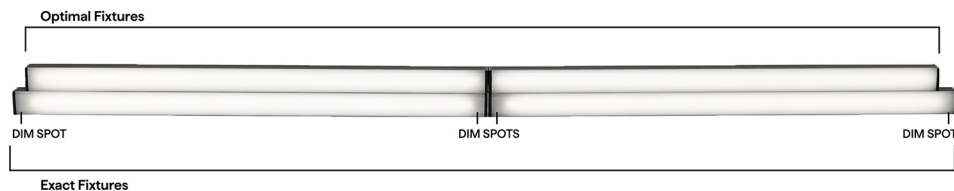



# VERS-ENCAPSULATED (06) FOR WARM DIM APPLICATIONS





24VDC Linear Fixtures - Surface & Recessed

## WD ENC LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH




Requested Nominal Length	S1 & S2 	P1 & P2 	S3 & S4 	P3 & P4 
12"	10.49"	10.74"	10.34"	10.44"
13"	12.49"	12.74"	12.34"	12.44"
14"	12.49"	12.74"	12.34"	12.44"
15"	14.49"	14.74"	14.34"	14.44"
16"	14.49"	14.74"	14.34"	14.44"
17"	16.49"	16.74"	16.34"	16.44"
18"	16.49"	16.74"	16.34"	16.44"
19"	18.49"	18.74"	18.34"	18.44"
20"	18.49"	18.74"	18.34"	18.44"
21"	20.49"	20.74"	20.34"	20.44"
22"	20.49"	20.74"	20.34"	20.44"
23"	22.49"	22.74"	22.34"	22.44"
24"	22.49"	22.74"	22.34"	22.44"
36"	34.49"	34.74"	34.34"	34.44"
48"	46.49"	46.74"	46.34"	46.44"
60"	58.49"	58.74"	58.34"	58.44"
72"	70.49"	70.74"	70.34"	70.44"
84"	82.49"	82.74"	82.34"	82.44"
96"	94.49"	94.74"	94.34"	94.44"

## DW-HE ENC LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 	P1 & P2 	S3 & S4 	P3 & P4 
12"	10.59"	10.94"	10.49"	10.59"
13"	12.59"	12.94"	12.49"	12.59"
14"	12.59"	12.94"	12.49"	12.59"
15"	14.59"	14.94"	14.49"	14.59"
16"	14.59"	14.94"	14.49"	14.59"
17"	16.59"	16.94"	16.49"	16.59"
18"	16.59"	16.94"	16.49"	16.59"
19"	18.59"	18.94"	18.49"	18.59"
20"	18.59"	18.94"	18.49"	18.59"
21"	20.59"	20.94"	20.49"	20.59"
22"	20.59"	20.94"	20.49"	20.59"
23"	22.59"	22.94"	22.49"	22.59"
24"	22.59"	22.94"	22.49"	22.59"
36"	34.59"	34.94"	34.49"	34.59"
48"	46.59"	46.94"	46.49"	46.59"
60"	58.59"	58.94"	58.49"	58.59"
72"	70.59"	70.94"	70.49"	70.59"
84"	82.59"	82.94"	82.49"	82.59"
96"	94.59"	94.94"	94.49"	94.59"



# VERS-ENCAPSULATED (06) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	DW-HE Warm Dim Applications	DW-HE Warm Dim Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	Q-SET-QZ-DW QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+WD QZ-DW
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with WD App Dongle	

DIMMING PROTOCOL	INDOOR	OUTDOOR
	DW-HE Warm Dim Applications	DW-HE Warm Dim Applications
Phase	QZ-DW	Q-SET-QZ-DW QZ-DW
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	Q-SET-QZ-DW QOM-eLED+WD QZ-DW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN	
<b>DALI-2: DT6</b> LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
<b>DALI-2: DT8</b> LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
<b>SCENE App Dimmed</b>	Non-Dim Power Supply with WD App Dongle	



# VERS-ENCAPSULATED (06) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-M</b>  1.41" .71" Adjustable mounting bracket - Medium	<b>HINGE - HMB-L</b>  1.46" 1.29" Adjustable mounting bracket - Large	<b>HINGE - HMB-XL</b>  1.46" 4" Adjustable mounting bracket - XLarge	<b>Q-PIVOT</b>  .75" 1.03" Small mounting accessory	<b>Q-ANGLE</b>  2.23" 1.38" Adjustable mounting accessory	<b>NJ-LARGE</b>  J Mounting Bracket	<b>NU-LARGE</b>  U Mounting Bracket	<b>SD-J-LARGE</b>  J Mounting Bracket	<b>BL-LARGE</b>  Backwards L Mounting Bracket	<b>NL-LARGE</b>  L Mounting Bracket
<b>SD-L-LARGE</b>  L Mounting Bracket									

## COMPATIBLE WIRING ACCESSORIES

**Q-mini-J5**  
  
2.80"  
2.27"  
UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

## COMPATIBLE CONTROL ACCESSORIES

**SCENE APP DONGLE**  
  
1.36"  
2.58"  
Wi-Fi or Bluetooth Connectivity

## COMPATIBLE APPS

**NFC APP**  
  
Read and write DMX addresses and adjust voltage