





VERS-ENCAPSULATED (06) STATIC WHITE

24VDC Linear Fixtures - Surface &
Recessed



- Wet-rated VERSatile fixture encapsulated in polyurethane
- The polyurethane encapsulation provides optimal delivered lumens
- Features integrated metal endcaps
- Mounting options include a concealed or magnetic clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- Consult factory for field assembly options
- Optional external louver accessory available in white or black for added glare control

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	LENS	EXTERNAL LOUVER
			ENC		

ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15	16	17
WIRE IN/ OUT	CONN/ WIRE IN	CONN/ WIRE OUT	END CAP IN	END CAP OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **VERS-06-SW-5.0-30-ENC-ENC/TL-L1-BK-P1-BW-BW-STD-STD-BK-CL2-CC-BK-48"-E**

1 PRODUCT VERS-06-SW VERS-06-SW-USA Select USA option for BAA and BABA projects. See following pages for compatible power supplies.	2 WATTS/FT <table><tr><td>1.5</td><td>1.5W/ft</td></tr><tr><td>3.0</td><td>3.0W/ft</td></tr><tr><td>4.0</td><td>4.0W/ft</td></tr><tr><td>5.0</td><td>5.0W/ft</td></tr><tr><td>1.5HE</td><td>1.5W/ft HE</td></tr><tr><td>3.0HE</td><td>3.0W/ft HE</td></tr><tr><td>6.0HE</td><td>6.0W/ft HE</td></tr></table>	1.5	1.5W/ft	3.0	3.0W/ft	4.0	4.0W/ft	5.0	5.0W/ft	1.5HE	1.5W/ft HE	3.0HE	3.0W/ft HE	6.0HE	6.0W/ft HE	3 CCT <table><tr><td>24</td><td>2400K</td></tr><tr><td>27</td><td>2700K</td></tr><tr><td>30</td><td>3000K</td></tr><tr><td>35</td><td>3500K</td></tr><tr><td>40</td><td>4000K</td></tr></table>	24	2400K	27	2700K	30	3000K	35	3500K	40	4000K	4 RATED <table><tr><td>ENC</td><td>IP67</td></tr></table>	ENC	IP67	5 LENS <table><tr><td>ENC/CL</td><td>Encapsulated in Clear</td></tr><tr><td>ENC/TL</td><td>Encapsulated in Translucent</td></tr></table> <p>For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages</p>	ENC/CL	Encapsulated in Clear	ENC/TL	Encapsulated in Translucent	6 EXTERNAL LOUVER <table><tr><td>L1-WH</td><td>White Plastic</td></tr><tr><td>L1-BK</td><td>Black Plastic</td></tr><tr><td>L2-ST</td><td>Satin Anodized Aluminum</td></tr><tr><td>L2-BK</td><td>Black Anodized Aluminum</td></tr><tr><td>L2-WH</td><td>White Powder Coated Aluminum</td></tr><tr><td>N/A</td><td>No Louver</td></tr></table> <p>Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. Aluminum louvers come in maximum 98" lengths and will be cut to match fixture length. White and custom painted finishes are not compatible with L2 external louvers.</p>	L1-WH	White Plastic	L1-BK	Black Plastic	L2-ST	Satin Anodized Aluminum	L2-BK	Black Anodized Aluminum	L2-WH	White Powder Coated Aluminum	N/A	No Louver
1.5	1.5W/ft																																														
3.0	3.0W/ft																																														
4.0	4.0W/ft																																														
5.0	5.0W/ft																																														
1.5HE	1.5W/ft HE																																														
3.0HE	3.0W/ft HE																																														
6.0HE	6.0W/ft HE																																														
24	2400K																																														
27	2700K																																														
30	3000K																																														
35	3500K																																														
40	4000K																																														
ENC	IP67																																														
ENC/CL	Encapsulated in Clear																																														
ENC/TL	Encapsulated in Translucent																																														
L1-WH	White Plastic																																														
L1-BK	Black Plastic																																														
L2-ST	Satin Anodized Aluminum																																														
L2-BK	Black Anodized Aluminum																																														
L2-WH	White Powder Coated Aluminum																																														
N/A	No Louver																																														
7 WIRE IN/OUT SINGLE (Input only) S1 End Feed S2 Bottom Feed S3 Left Side Feed S4 Right Side Feed PASS THROUGH (Input/output) P1 End Feed P2 Bottom Feed P3 Left Side Feed P4 Right Side Feed P2, P3, P4 options not compatible with external louver	8 CONN/WIRE IN <table><tr><td>BW</td><td>Bare Wire (Standard 36")</td></tr><tr><td>CON6</td><td>Connector 6"</td></tr><tr><td>CON24</td><td>Connector 24"</td></tr></table> <p>BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</p> <table><tr><td>BW</td><td>Bare Wire (Standard 36")</td></tr><tr><td>CON6</td><td>Connector 6"</td></tr><tr><td>CON24</td><td>Connector 24"</td></tr></table> <p>BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</p>	BW	Bare Wire (Standard 36")	CON6	Connector 6"	CON24	Connector 24"	BW	Bare Wire (Standard 36")	CON6	Connector 6"	CON24	Connector 24"	9 CONN/WIRE OUT <table><tr><td>CLS</td><td>Closed End (No feed)</td></tr></table> <table><tr><td>BW</td><td>Bare Wire (Standard 36")</td></tr><tr><td>CON6</td><td>Connector 6"</td></tr><tr><td>CON24</td><td>Connector 24"</td></tr></table> <p>BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</p>	CLS	Closed End (No feed)	BW	Bare Wire (Standard 36")	CON6	Connector 6"	CON24	Connector 24"	10 END CAP IN <table><tr><td>STD</td><td>Standard</td></tr><tr><td>CL</td><td>Clear</td></tr></table> <p>STD - End cap matches fixture finish chosen Select CL for continuous runs</p>	STD	Standard	CL	Clear	11 END CAP OUT <table><tr><td>STD</td><td>Standard</td></tr><tr><td>CL</td><td>Clear</td></tr></table> <p>STD - End cap matches fixture finish chosen Select CL for continuous runs</p>	STD	Standard	CL	Clear															
BW	Bare Wire (Standard 36")																																														
CON6	Connector 6"																																														
CON24	Connector 24"																																														
BW	Bare Wire (Standard 36")																																														
CON6	Connector 6"																																														
CON24	Connector 24"																																														
CLS	Closed End (No feed)																																														
BW	Bare Wire (Standard 36")																																														
CON6	Connector 6"																																														
CON24	Connector 24"																																														
STD	Standard																																														
CL	Clear																																														
STD	Standard																																														
CL	Clear																																														
12 WIRE COLOR <table><tr><td>WH</td><td>White</td></tr><tr><td>BK</td><td>Black</td></tr></table>	WH	White	BK	Black	13 WIRE TYPE <table><tr><td>CL2</td><td>Class 2</td></tr><tr><td>CL2P</td><td>Plenum Rated</td></tr></table> <p>CL2P only available with bare wire leads (BW)</p>	CL2	Class 2	CL2P	Plenum Rated	14 MOUNTING <table><tr><td>CC</td><td>Concealed Clip</td></tr><tr><td>MG</td><td>Magnet</td></tr></table>	CC	Concealed Clip	MG	Magnet	15 FINISH <table><tr><td>ST</td><td>Satin</td></tr><tr><td>BK</td><td>Black</td></tr><tr><td>BZ</td><td>Bronze</td></tr><tr><td>WH</td><td>White</td></tr><tr><td>CU</td><td>Custom</td></tr></table> <p>White and custom finishes are incompatible with external louvers; custom finishes have longer lead times. Non-RAL 9003 whites custom.</p>	ST	Satin	BK	Black	BZ	Bronze	WH	White	CU	Custom	16 LENGTH (IN) <p>Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".</p>	17 EXACT/OPTIMAL <table><tr><td>O</td><td>Optimal Illumination</td></tr><tr><td>E</td><td>Exact Specified Length</td></tr></table> <p>Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.</p>	O	Optimal Illumination	E	Exact Specified Length																
WH	White																																														
BK	Black																																														
CL2	Class 2																																														
CL2P	Plenum Rated																																														
CC	Concealed Clip																																														
MG	Magnet																																														
ST	Satin																																														
BK	Black																																														
BZ	Bronze																																														
WH	White																																														
CU	Custom																																														
O	Optimal Illumination																																														
E	Exact Specified Length																																														


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




VERS-ENCAPSULATED (06) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed


1 PRODUCT - DIMENSIONS




Profile




Profile with concealed clip




Profile with magnetic clip



Profile with magnet mount clip & magnetic mount accessory



Profile with Louver




Profile with concealed clip and louver

2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with VERS-06-SW-**-30-ENC


	1.5 W/FT		1.5HE W/FT		3.0 W/FT		3.0HE W/FT		4.0 W/FT		5.0 W/FT		6.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
ENC/CL	139	96	185	97	242	96	335	96	286	96	347	96	575	96
ENC/TL	125	96	154	97	204	96	283	96	273	96	307	96	490	96

5 DIODE VISIBILITY

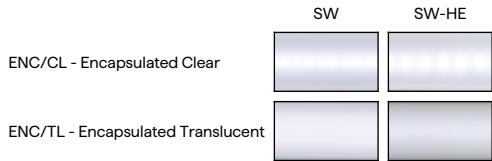

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.







VERS-ENCAPSULATED (06) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed


6 EXTERNAL LOUVER

PLASTIC

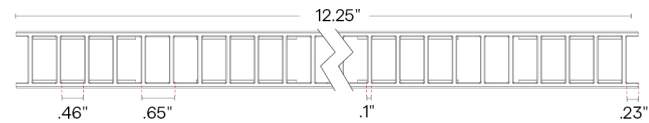



Lumen Multiplier

WH	BK
0.65	0.40




Profile with plastic louver

METAL

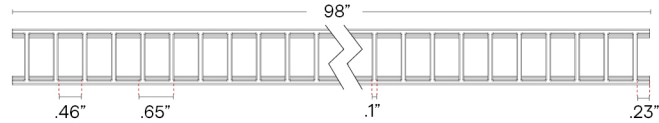

Lumen Multiplier

WH	BK	ST
0.67	0.40	0.62




Profile with metal louver

TEMPERATURE RATINGS


	1.5 W/FT		1.5 HE W/FT		3.0 W/FT		3.0 HE W/FT		4.0 W/FT		5.0 W/FT		6.0 HE W/FT	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	130°F	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	115°F	-4°F	105°F	-4°F	105°F

7 WIRE INPUT/OUTPUT

SINGLE (Input only)

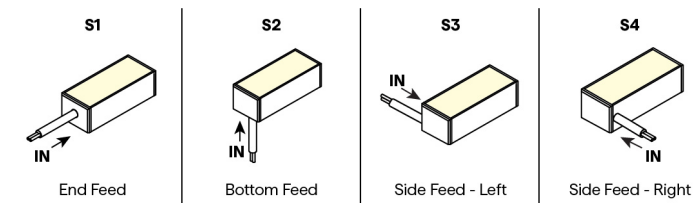

PASS THROUGH (Input/Output)

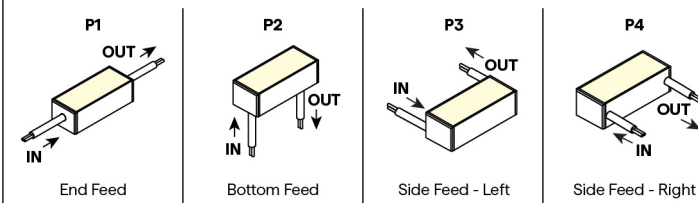




VERS-ENCAPSULATED (06) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

CONFIGURATION OPTIONS

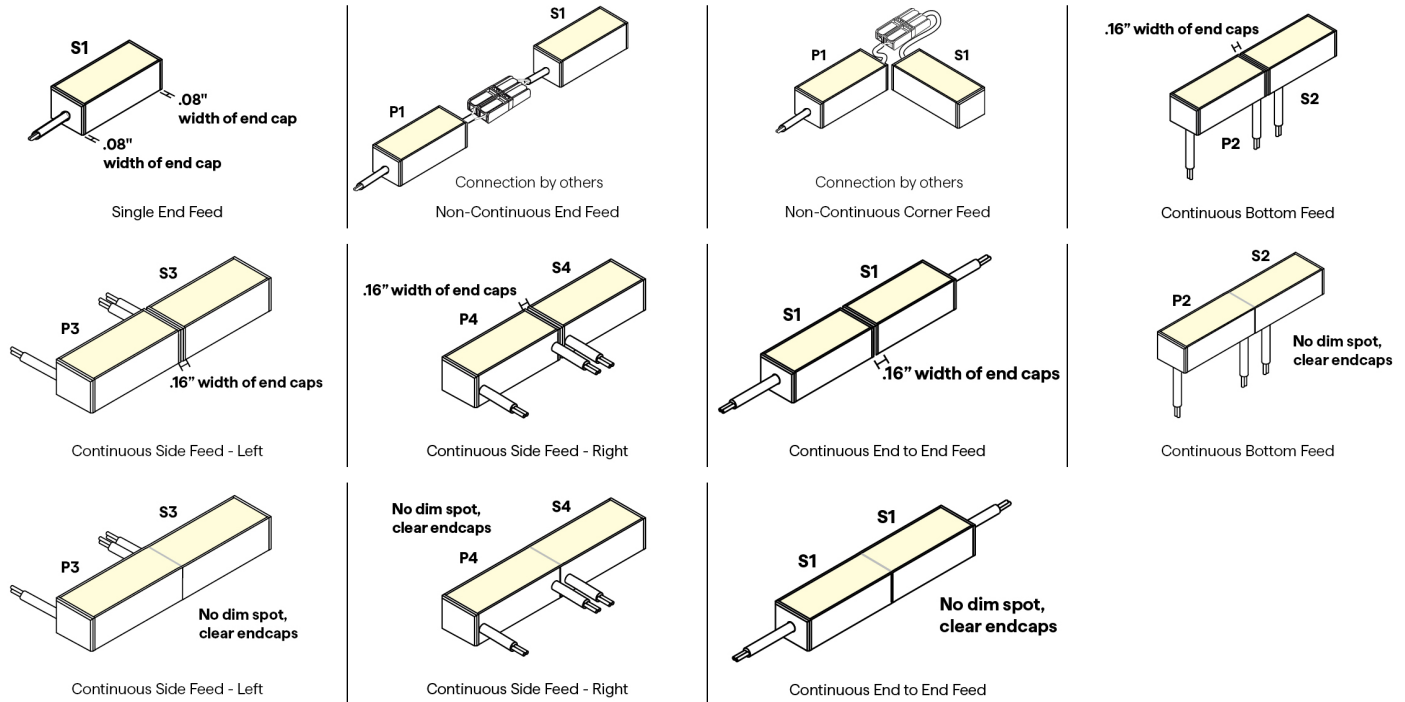


8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product.

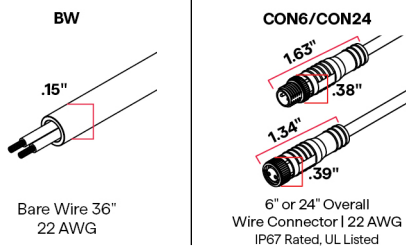

10 / 11 END CAP - IN/OUT

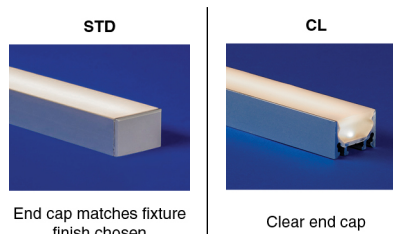

12 WIRE COLOR





VERS-ENCAPSULATED (06) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

14 MOUNTING

CC (CC-01)	CC (CC-02)	MG	MMA-02
Concealed Clip	Louver Concealed Clip <small>Required if L1 or L2 Louver is selected</small>	Magnet Clip	Magnet Mount Accessory for MG-02
2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'	2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'	One MG provided per foot To order separately use MG-02	Sold separately, to order use MMA-02
To order separately use CC-01 (sold in pairs)	To order separately use CC-02 (sold in pairs)		Each clip comes with a #6 Flat Screw
Each clips comes with a #4 x 5/8" Flat Head screw.	Each clips comes with a #4 x 5/8" Flat Head screw.		Required when mounting to a non-magnetic surface

15 FINISH

	Satin
	Black
	Bronze
	White


Custom finishes require a longer lead time, consult factory

15 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

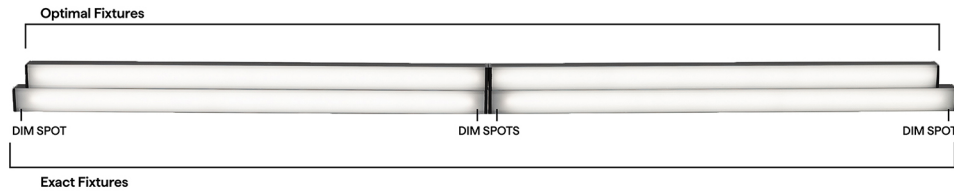




VERS-ENCAPSULATED (06) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

SW ENC LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 	P1 & P2 	S3 & S4 	P3 & P4 
12"	11.49"	11.74"	11.34"	11.44"
13"	12.49"	12.74"	12.34"	12.44"
14"	13.49"	13.74"	13.34"	13.44"
15"	14.49"	14.74"	14.34"	14.44"
16"	15.49"	15.74"	15.34"	15.44"
17"	16.49"	16.74"	16.34"	16.44"
18"	17.49"	17.74"	17.34"	17.44"
19"	18.49"	18.74"	18.34"	18.44"
20"	19.49"	19.74"	19.34"	19.44"
21"	20.49"	20.74"	20.34"	20.44"
22"	21.49"	21.74"	21.34"	21.44"
23"	22.49"	22.74"	22.34"	22.44"
24"	23.49"	23.74"	23.34"	23.44"
36"	35.49"	35.74"	35.34"	35.44"
48"	47.49"	47.74"	47.34"	47.44"
60"	59.49"	59.74"	59.34"	59.44"
72"	71.49"	71.74"	71.34"	71.44"
84"	83.49"	83.74"	83.34"	83.44"
96"	95.49"	95.74"	95.34"	95.44"

SW-HE ENC LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 	P1 & P2 	S3 & S4 	P3 & P4 
12"	10.49"	10.74"	10.34"	10.44"
13"	12.49"	12.74"	12.34"	12.44"
14"	12.49"	12.74"	12.34"	12.44"
15"	14.49"	14.74"	14.34"	14.44"
16"	14.49"	14.74"	14.34"	14.44"
17"	16.49"	16.74"	16.34"	16.44"
18"	16.49"	16.74"	16.34"	16.44"
19"	18.49"	18.74"	18.34"	18.44"
20"	18.49"	18.74"	18.34"	18.44"
21"	20.49"	20.74"	20.34"	20.44"
22"	20.49"	20.74"	20.34"	20.44"
23"	22.49"	22.74"	22.34"	22.44"
24"	22.49"	22.74"	22.34"	22.44"
36"	34.49"	34.74"	34.34"	34.44"
48"	46.49"	46.74"	46.34"	46.44"
60"	58.49"	58.74"	58.34"	58.44"
72"	70.49"	70.74"	70.34"	70.44"
84"	82.49"	82.74"	82.34"	82.44"
96"	94.49"	94.74"	94.34"	94.44"



VERS-ENCAPSULATED (06) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP IQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP IQ-PH+QD1	QOM-DC+CAP QOM-PH	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED	














VERS-ENCAPSULATED (06) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN		
ECO System	QTM-eLED(E)	QTM-eLED(E)		
DMX	QZ-DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle		

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M  1.41" .71" Adjustable mounting bracket - Medium	HINGE - HMB-L  1.46" 1.29" Adjustable mounting bracket - Large	HINGE - HMB-XL  4" 1.46" Adjustable mounting bracket - XLarge	Q-PIVOT  .75" 1.03" Small mounting accessory	Q-ANGLE  2.23" 1.38" Adjustable mounting accessory	NJ-LARGE  J Mounting Bracket	NU-LARGE  U Mounting Bracket	SD-J-LARGE  J Mounting Bracket	BL-LARGE  Backwards L Mounting Bracket	NL-LARGE  L Mounting Bracket
SD-L-LARGE  L Mounting Bracket									



VERS-ENCAPSULATED (06) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE WIRING ACCESSORIES

<p>Q-mini-J</p>  <p>UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)</p>	<p>Q-mini-J5</p>  <p>UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)</p>	<p>CON120-EXT</p>  <p>10ft Con cable extender DRY/DMP/WET</p>	<p>CON FOUR-FER</p>  <p>Splits lead from one to four LED Con connectors DRY/DMP/WET</p>	<p>CON M - BARREL F</p>  <p>Male con to barrel cable adaptor DRY/DMP</p>
--	---	---	---	--

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage