





VERS-NANO-LOUVER-SK (11)

STATIC WHITE

24VDC Linear Fixtures - Suspended

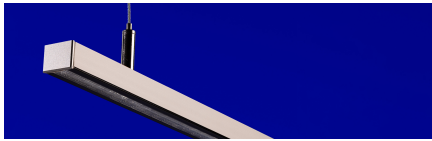

- Features a co-extruded lens with integrated louvers that provide 35° viewing angles, delivering exceptional glare control ideal for direct view applications.
- 80 Suspension Kit configurations allow fixture to be seamlessly incorporated into any interior.
- Create long, continuous lines of light with easy-to-use inline bracket and double feed joiner connectors.
- The Crosswise louver reduces end-view glare while the Lengthwise louver reduces side-view glare.
- Lens options include frosted or diffused finishes to suit various lighting requirements.
- Integrated metal endcaps combined with extruded aluminum housing give this LED fixture a polished modern look.
- White Optics, an internal coating that results in greater lumen output, comes standard in all VERS LED fixtures.
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations.
- Consult factory for field assembly options.

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

| 1 | 2 | 3 | 4 | 5 | 6 |
|---------|-----------|-----|-------|---------------|-----------------|
| PRODUCT | WATTS/ FT | CCT | RATED | INTERNAL LENS | INTERNAL LOUVER |
| | | | | | |

ADDITIONAL INFORMATION REQUIRED TO ORDER

| 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |
|--------------------|--------------------|---------------------|------------|-----------|----------|--------|-------------|----------------|
| WIRE INPUT/ OUTPUT | CONNECTOR/ WIRE IN | CONNECTOR/ WIRE OUT | WIRE COLOR | WIRE TYPE | MOUNTING | FINISH | LENGTH (IN) | EXACT/ OPTIMAL |
| | BW | CLS | SV | AWM | SK | | | |

Sample Part Number: **VERS-11-SK-SW-5.0-30-DRY-DF-C-S2A-CON6-CON6-BK-CL2-MG-BK-48"-E**

1

PRODUCT

VERS-11-SK-SW

VERS-11-SK-SW-USA

Select USA option for BAA and BABA projects. Only DRY ratings apply.

See following pages for compatible power supplies.

2

WATTS/FT

1.5

1.5W/ft

3.0

3.0W/ft

4.0

4.0W/ft

5.0

5.0W/ft

1.5HE

1.5W/ft HE

3.0HE

3.0W/ft HE

6.0HE

6.0W/ft HE

9.0HE

9.0W/ft HE

3

CCT

20

2000K

22

2200K

24

2400K

27

2700K

30

3000K

35

3500K

40

4000K

4

RATED

DRY

IP20

DMP

IP54

5

INTERNAL LENS

DF

Diffused Internal

FR

Frosted Internal

For representation of LED visibility, see Diode Visibility section on following pages.
For beam angles, see Photometric Performance section on following pages.

6

INTERNAL LOUVER

C

Crosswise Internal

L

Lengthwise Internal

Louver slats are angled. Refer to diagrams to identify the side of the fixture with the most visual cutoff.

7

WIRE INPUT/OUTPUT

SINGLE (Input Only)

S2A Bottom Feed

S2B Bottom Feed

8

CONNECTOR/WIRE IN

BW

Bare Wire (Standard 36")

BW: Standard length is 36", max length is 120".
Request custom length by writing in part number next to BW (example: BW48)

9

CONNECTOR/WIRE OUT

CLS

Closed End (No feed)

10

WIRE COLOR

SV

Silver

11

WIRE TYPE

AWM

Appliance Wiring Material

12

MOUNTING

SK

Suspension Bracket

13

FINISH

ST

Satin

BK

Black

BZ

Bronze

WH

White

CU

Custom

Finish applies only to aluminum extrusion and endcaps; cover lens and internal louver are always black. Custom finishes have longer lead times. Non-RAL 9003 whites are custom.

14

LENGTH (IN)

Minimum length is 12", maximum length is 98" not including end caps.
Contact us for lengths under 12".

15

EXACT/OPTIMAL

O

Optimal Illumination

E

Exact Specified Length


Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.



VERS-NANO-LOUVER-SK (11) STATIC WHITE

24VDC Linear Fixtures - Suspended

1 PRODUCT - DIMENSIONS



Profile with lens

2 DELIVERED LUMENS


[Calculated L70 = 70000 hrs]
Tested with VERS-11-SK-SW-**-30-DRY

| | 1.5W/FT | | | 3.0W/FT | | | 4.0W/FT | | | 5.0W/FT | | |
|------|---------|-----|--------|---------|-----|--------|---------|-----|--------|---------|-----|--------|
| | LM/FT | CRI | UGR | LM/FT | CRI | UGR | LM/FT | CRI | UGR | LM/FT | CRI | UGR |
| FR-C | 38 | 98 | ≤ 6.4 | 64 | 98 | ≤ 8.4 | 82 | 98 | ≤ 8.8 | 100 | 98 | ≤ 10.2 |
| FR-L | 56 | 98 | ≤ 15.3 | 94 | 98 | ≤ 17.2 | 121 | 98 | ≤ 18.4 | 163 | 98 | ≤ 19.4 |
| DF-C | 34 | 98 | ≤ 10.6 | 55 | 98 | ≤ 12.4 | 72 | 98 | ≤ 13.4 | 90 | 98 | ≤ 14.0 |
| DF-L | 42 | 98 | ≤ 14.2 | 68 | 98 | ≤ 15.9 | 88 | 98 | ≤ 16.9 | 110 | 98 | ≤ 17.3 |

[Calculated L70 = 66000 hrs]
Tested with VERS-11-SK-SW-HE-**-30-DRY

| | 1.5HE W/FT | | | 3.0HE W/FT | | | 6.0HE W/FT | | | 9.0HE W/FT | | |
|------|------------|-----|--------|------------|-----|--------|------------|-----|--------|------------|-----|--------|
| | LM/FT | CRI | UGR | LM/FT | CRI | UGR | LM/FT | CRI | UGR | LM/FT | CRI | UGR |
| FR-C | 44 | 98 | ≤ 7.4 | 89 | 98 | ≤ 9.6 | 182 | 98 | ≤ 11.6 | 263 | 98 | ≤ 12.8 |
| FR-L | 66 | 98 | ≤ 15.7 | 131 | 98 | ≤ 18.3 | 269 | 98 | ≤ 20.8 | 373 | 98 | ≤ 21.7 |
| DF-C | 40 | 98 | ≤ 11.3 | 77 | 98 | ≤ 13.5 | 155 | 98 | ≤ 15.9 | 235 | 98 | ≤ 17.5 |
| DF-L | 48 | 98 | ≤ 14.4 | 97 | 98 | ≤ 17.2 | 191 | 98 | ≤ 19.4 | 278 | 98 | ≤ 20.4 |

6 DIODE VISIBILITY

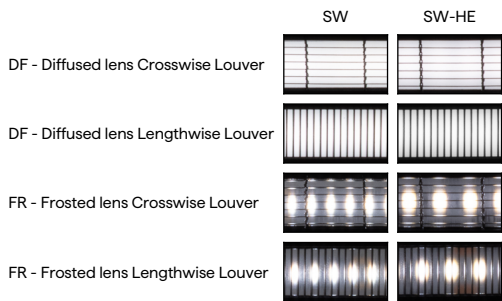



VERS-NANO-LOUVER-SK (11) STATIC WHITE


24VDC Linear Fixtures - Suspended

5 DIODE VISIBILITY



PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.




TEMPERATURE RATINGS

| | | 1.5 W/FT | | 1.5 HE W/FT | | 3.0 W/FT | | 3.0 HE W/FT | | 4.0 W/FT | | 5.0 W/FT | | 6.0 HE W/FT | | 9.0 HE W/FT | |
|-----|----------------------------------|----------|-------|-------------|-------|----------|-------|-------------|-------|----------|-------|----------|-------|-------------|-------|-------------|-------|
| | | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| DRY | Ambient Operating Temp - Surface | -4°F | 140°F | -4°F | 145°F | -4°F | 130°F | -4°F | 135°F | -4°F | 125°F | -4°F | 120°F | -4°F | 120°F | -4°F | 100°F |
| DMP | Ambient Operating Temp - Surface | -4°F | 135°F | -4°F | 140°F | -4°F | 125°F | -4°F | 130°F | -4°F | 120°F | -4°F | 115°F | -4°F | 115°F | -13°F | 95°F |
| WET | Ambient Operating Temp - Surface | -4°F | 135°F | — | — | -4°F | 125°F | — | — | -4°F | 120°F | -4°F | 115°F | — | — | — | — |

6 INTERNAL LOUVER


INTERNAL LOUVER - LENGTHWISE

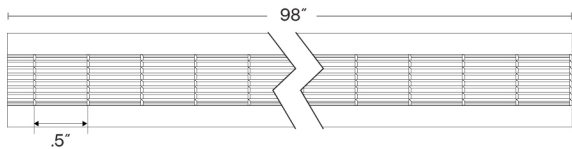


L



INTERNAL LOUVER - CROSSWISE

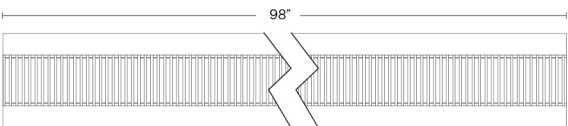

C







VERS-NANO-LOUVER-SK (11) STATIC WHITE

24VDC Linear Fixtures - Suspended

7 WIRE INPUT/OUTPUT



SINGLE (Input only)

Reduced Side View Glare - Louver slats are angled towards one side of the fixture. Refer to diagrams to identify the side of the fixture with the most visual cutoff.






CROSSWISE - SINGLE (Input only)

Reduced End View Glare - Louver slats are angled towards one end of the fixture. Refer to diagrams to identify the side of the fixture with the most visual cutoff.




CONFIGURATION OPTIONS



8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product.

BW




Bare Wire 36" | 22 AWG
Clear outer jacket, metal shield

10 WIRE COLOR




12 MOUNTING



2 required up to 6' lengths;
additional support required
between 6' to 8'

13 FINISH



Finish is only applicable to the aluminum extrusion and endcaps. The Cover Lens and Internal Louver is always black. Custom finishes require a longer lead time, consult factory.



VERS-NANO-LOUVER-SK (11) STATIC WHITE


24VDC Linear Fixtures - Suspended

15 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)


[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

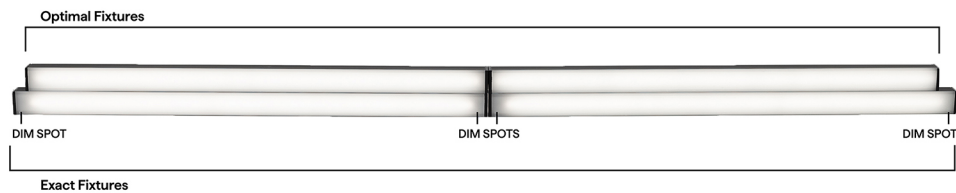


SW DRY DMP LENGTHS BY INCH

EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture |
|------------------|---|
| |  |
| 12" | 0.5" |
| 13" | 0.5" |
| 14" | 0.5" |
| 15" | 0.5" |
| 16" | 0.5" |
| 17" | 0.5" |
| 18" | 0.5" |
| 19" | 0.5" |
| 20" | 0.5" |
| 21" | 0.5" |
| 22" | 0.5" |
| 23" | 0.5" |
| 24" | 0.5" |
| 36" | 0.5" |
| 48" | 0.5" |
| 60" | 0.5" |
| 72" | 0.5" |
| 84" | 0.5" |
| 96" | 0.5" |

OPTIMAL LENGTH

| Requested Nominal Length | S2A/B |
|--------------------------|---|
| |  |
| 12" | 11.51" |
| 13" | 12.51" |
| 14" | 13.51" |
| 15" | 14.51" |
| 16" | 15.51" |
| 17" | 16.51" |
| 18" | 17.51" |
| 19" | 18.51" |
| 20" | 19.51" |
| 21" | 20.51" |
| 22" | 21.51" |
| 23" | 22.51" |
| 24" | 23.51" |
| 36" | 35.51" |
| 48" | 47.51" |
| 60" | 59.51" |
| 72" | 71.51" |
| 84" | 83.51" |
| 96" | 95.51" |



VERS-NANO-LOUVER-SK (11) STATIC WHITE


24VDC Linear Fixtures - Suspended

SW-HE DRY DMP LENGTHS BY INCH

EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture S1  End Feed |
|------------------|---|
| 12" | 1" |
| 13" | 0.5" |
| 14" | 1" |
| 15" | 0.5" |
| 16" | 1" |
| 17" | 0.5" |
| 18" | 1" |
| 19" | 0.5" |
| 20" | 1" |
| 21" | 0.5" |
| 22" | 1" |
| 23" | 0.5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |

OPTIMAL LENGTH

| Requested Nominal Length | S2A/B S2  Bottom Feed |
|--------------------------|---|
| 12" | 11.51" |
| 13" | 12.51" |
| 14" | 13.51" |
| 15" | 14.51" |
| 16" | 15.51" |
| 17" | 16.51" |
| 18" | 17.51" |
| 19" | 18.51" |
| 20" | 19.51" |
| 21" | 20.51" |
| 22" | 21.51" |
| 23" | 22.51" |
| 24" | 23.51" |
| 36" | 35.51" |
| 48" | 47.51" |
| 60" | 59.51" |
| 72" | 71.51" |
| 84" | 83.51" |
| 96" | 95.51" |

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIM TO LEVEL | INDOOR | |
|--------------|--|--|
| | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ |
| Dim to Black | Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1 | Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1 |
| 0.1% | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP |
| 1% | QTM-eLED(E) QZ-DALI-DT6 | QTM-eLED(E) QZ-DALI-DT6 |
| 10% | Non-Dim Power Supply with SW App Dongle | Non-Dim Power Supply with SW App Dongle |




VERS-NANO-LOUVER-SK (11) STATIC WHITE

24VDC Linear Fixtures - Suspended

| DIMMING PROTOCOL | INDOOR | |
|------------------|--|--|
| | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ |
| Non-Dim | QT-CAB-eLED-ND QTM-eLED-ND QZ-ND | QT-CAB-eLED-ND QTM-eLED-ND QZ-ND |
| Phase | Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1 | Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1 |
| 0-10V | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP |
| Lutron Athena | QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN | QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN |
| ECO System | QTM-eLED(E) | QTM-eLED(E) |
| DMX | QZ-DMX | QZ-DMX |
| DALI-2: DT6 | QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6 | QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6 |
| SCENE App Dimmed | Non-Dim Power Supply with SW App Dongle | Non-Dim Power Supply with SW App Dongle |

COMPATIBLE WIRING ACCESSORIES



COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage



VERS-SK

Linear Fixtures - Suspended



- Shop drawings required for run lengths over 8ft
- If no suspension length provided, 36" is standard
- Suspension cable maximum length: 120"
- Suspension cable is field cuttable
- Suspended fixtures over 6ft require additional suspension points. 8ft lengths will bow 0.25" in middle without additional support.
- Any run length over 8' requires inline brackets
- Consult factory for power over aircraft
- Consult factory for custom color of canopy
- Lag Screw is for mounting into drywall, wood, or other types of finished ceilings for non-feed mounting only

POWER FEED SUSPENSION KIT

| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
|---------|------|--------------|-------------|---------------|-------------|------------------------------|
| PRODUCT | FEED | CANOPY SHAPE | CANOPY SIZE | CANOPY FINISH | APPLICATION | SUSPENSION CABLE LENGTH (IN) |
| SK | | | 5" | | | |

Sample Part Number: **SK-SF-RD-5"-WH-JB-36"**

| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
|---------|------------------------------|-----------------------------|-------------|----------------------------|--|------------------------------|
| PRODUCT | FEED | CANOPY SHAPE | CANOPY SIZE | CANOPY FINISH | APPLICATION | SUSPENSION CABLE LENGTH (IN) |
| SK | SF DF Single Double | RD SQ Round Square | 5" | WH BK White Black | JB TB Junction Box T-Bar Mount JB - mounting bracket only, junction box not included TB - mounting bracket and junction box | 36" 120" |

NON-FEED SUSPENSION KIT

| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
|---------|------|--------------|-------------|---------------|-------------|------------------------------|
| PRODUCT | FEED | CANOPY SHAPE | CANOPY SIZE | CANOPY FINISH | APPLICATION | SUSPENSION CABLE LENGTH (IN) |
| SK | NF | | | | | |

Sample Part Number: **SK-SF-RD-5"-WH-JB-36"**

| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
|---------|---------------|-----------------------------|--------------------|--|---|------------------------------|
| PRODUCT | FEED | CANOPY SHAPE | CANOPY SIZE | CANOPY FINISH | APPLICATION | SUSPENSION CABLE LENGTH (IN) |
| SK | NF No Feed | RD SQ Round Square | 2" 5" 5" | WH BK White Black WH BK White Black | TB LS T-Bar Mount Lag Screw TB - T-Bar clip only, junction box not included JB Junction Box Mounting bracket only, junction box not included | 36" 120" |

KIT CONTENTS

- 1/16" Steel suspension cable – 36" standard
- Selected canopy
- Cable Gripper
- Cable Coupler

JBOX

- Bracket to mount to junction box (junction box not included)
- Wire strain relief
- Ties for securing electrical cable to suspension cable

T-BAR – feed

- Includes junction box specifically designed for T-BAR applications
- Bracket to mount to junction box
- Wire strain relief
- Ties for securing electrical wire to suspension cable

T-BAR – non-feed

- Bracket to mount to T-BAR (no junction box)

LAG SCREW – non-feed only

- Double ended screw, with a wood thread side and machine thread side
- One piece cable coupler



VERS-SK

Linear Fixtures - Suspended

3 CANOPY OPTIONS

RD - 2" - NF



Round
2"
No Feed

SQ - 2" - NF



Square
2"
No Feed

RD - 5" - NF




Round
5"
No Feed

SQ - 5" - NF




Square
5"
No Feed

RD - 5" - SF




Round
5"
Single Feed

SQ - 5" - SF




Square
5"
Single Feed

RD - 5" - DF



Round
5"
Double Feed

SQ - 5" - DF



Square
5"
Double Feed


5 CANOPY FINISH




White

Black

JOINTS/CONNECTORS




Inline Bracket



Double Feed Joiner


6 APPLICATION

TB
Power Feed Kit



T-Bar Junction Box

TB
Non-Feed Kit




T-Bar Clip

LS



Lag Screw

KIT HARDWARE



Cable Gripper



Cable Coupler



VERS-SK

Linear Fixtures - Suspended

MOUNTING


- Maximum single fixture length: 98"
- Suspended fixtures over 6ft require additional suspension points. 8ft lengths will bow 0.25" in middle without additional support.
- Shop drawings required for run lengths over 8ft
- Any double fed fixture will come with double feed joiner and inline bracket



Power Feed Suspension



Non-Feed Suspension

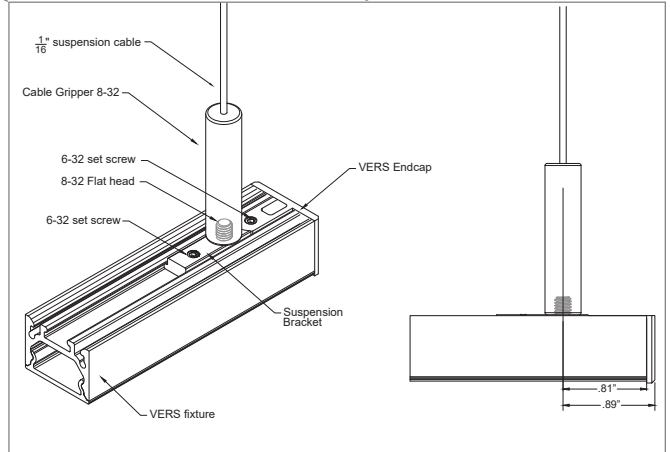



VERS-SK

Linear Fixtures - Suspended

MOUNTING

- Maximum single fixture length: 98"
- Suspended fixtures over 6ft require additional suspension points. 8ft lengths will bow 0.25" in middle without additional support.
- Shop drawings required for run lengths over 8ft
- Any double fed fixture will come with double feed joiner and inline bracket



Part number example for a suspended VERS-01 dry rated static white fixture with a diffused lens in 1.5W/ft, 3000K, in a satin finish:

A VERS-01-SK-SW-1.5-30-DRY-DF-N/A-S2-BW-CLS-SV-AWM-SK-ST-144" (1X)
SK-SF-RD-5"-WH-JB-36" (2X)
SK-NF-RD-5"-WH-JB-36" (1X)

B VERS-01-SK-SW-1.5-30-DRY-DF-N/A-S2-BW-CLS-SV-AWM-SK-ST-144" (1X)
SK-DF-RD-5"-WH-JB-36" (1X)
SK-NF-RD-5"-WH-JB-36" (2X)






VERS-SK

Linear Fixtures - Suspended

SUSPENSION T-BAR POWER FEED ASSEMBLY

SK-SF-RD-5-**-TB-36

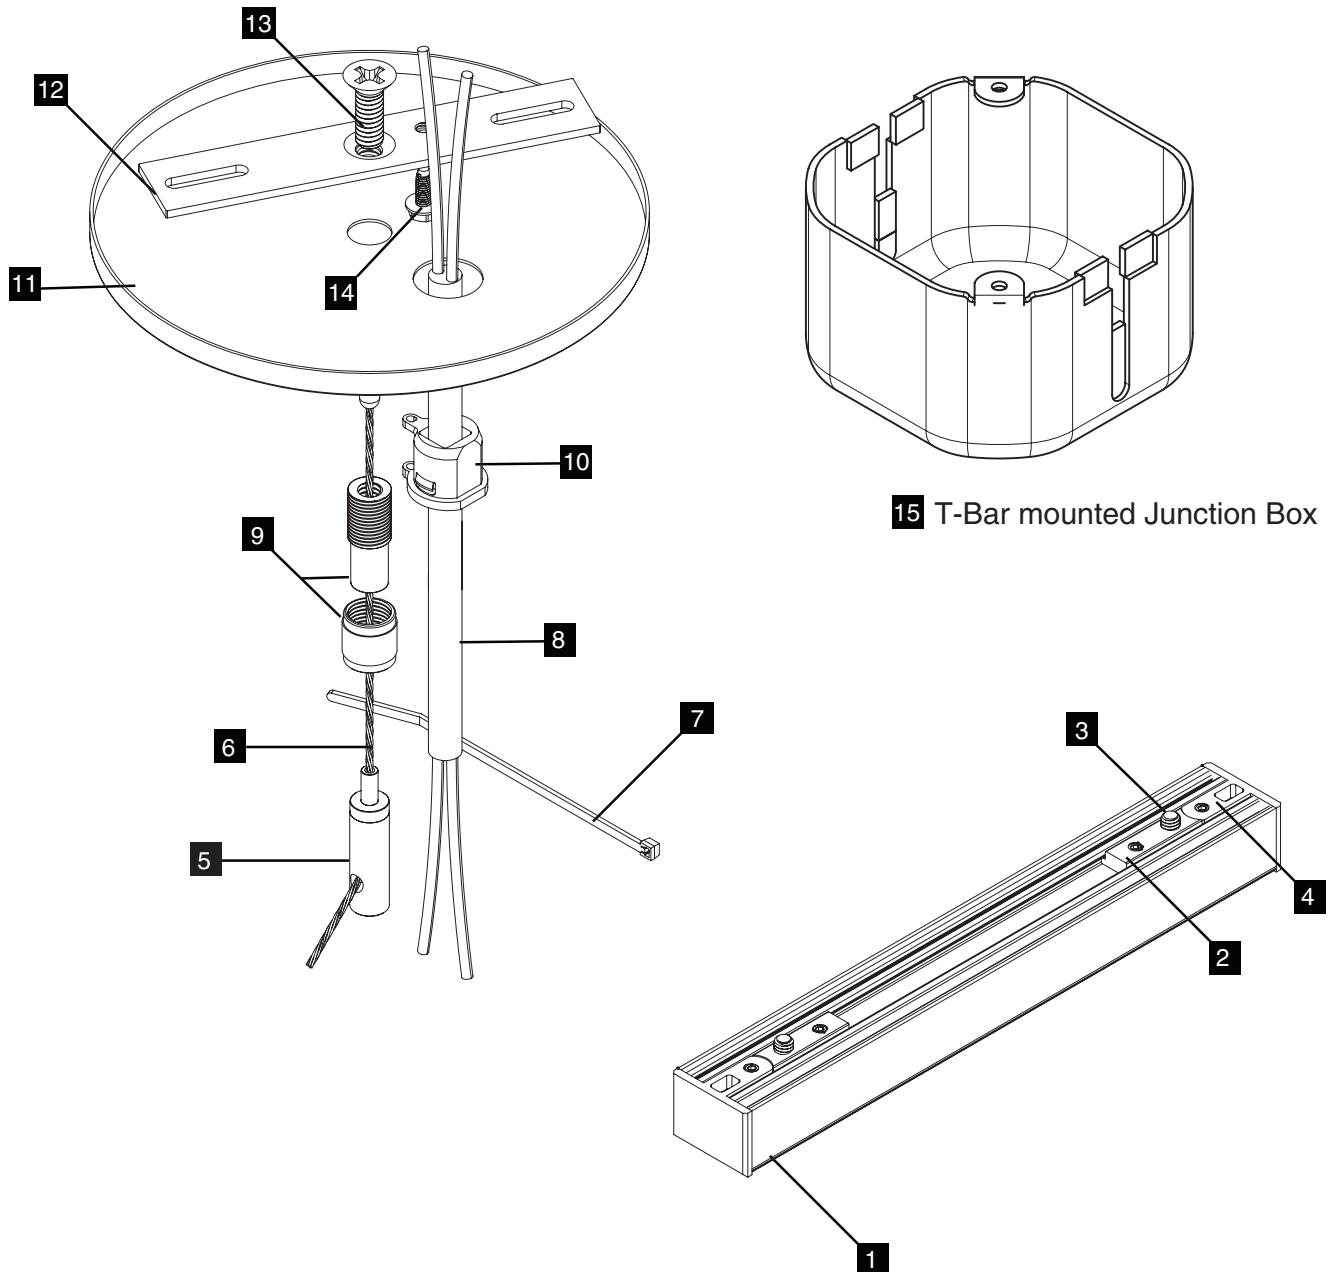

VERS SUSPENSION COMPONENTS

- | | | | | | | | | | | | | | |
|---|-----------|---|--------------------|----|---------------|----|--------|----|---------------|----|-------------|----|--------------|
| 1 | VERS | 2 | Suspension Bracket | 3 | 8-32 Screw | 4 | Endcap | 5 | Cable Gripper | 6 | 1/16" Cable | 7 | Tie |
| 8 | Lead Wire | 9 | Cable Coupler | 10 | Strain Relief | 11 | Canopy | 12 | Crossbar | 13 | 1/4"-20 | 14 | Ground Screw |



VERS-SK

Linear Fixtures - Suspended

SUSPENSION POWER FEED ASSEMBLY - TO MOUNT TO JUNCTION BOX*

*JUNCTION BOX NOT INCLUDED

SK-SF-RD-5-**-JB-36



VERS SUSPENSION COMPONENTS

- | | | | | | | | | | | | | | |
|---|-----------|---|--------------------|----|---------------|----|--------|----|---------------|----|-------------|----|--------------|
| 1 | VERS | 2 | Suspension Bracket | 3 | 8-32 Screw | 4 | Endcap | 5 | Cable Gripper | 6 | 1/16" Cable | 7 | Tie |
| 8 | Lead Wire | 9 | Cable Coupler | 10 | Strain Relief | 11 | Canopy | 12 | Crossbar | 13 | 1/4"-20 | 14 | Ground Screw |



VERS-SK

Linear Fixtures - Suspended

SUSPENSION T-BAR NON-FEED ASSEMBLY

SK-NF-RD-2-NF-* -TB-36



NON-POWERED FEED KIT

| | | | | |
|----------------------|-----------------------------|---------------------|---------------------|------------------------|
| 1 VERS | 2 Suspension Bracket | 3 8-32 Screw | 4 Endcap | 5 Cable Gripper |
| 6 1/16" Cable | 7 Cable Coupler | 8 Canopy | 9 T-Bar Clip | |



VERS-SK

Linear Fixtures - Suspended

LAG SCREW NON-FEED ASSEMBLY

SK-NF-RD-2-NF-*-LS-36



NON-POWERED FEED KIT

| | | | | |
|----------------------|-----------------------------|---------------------|--------------------|------------------------|
| 1 VERS | 2 Suspension Bracket | 3 8-32 Screw | 4 Endcap | 5 Cable Gripper |
| 6 1/16" Cable | 7 Cable Coupler | 8 Canopy | 9 Lag Screw | |