






# VERS-FLUSH (02) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS

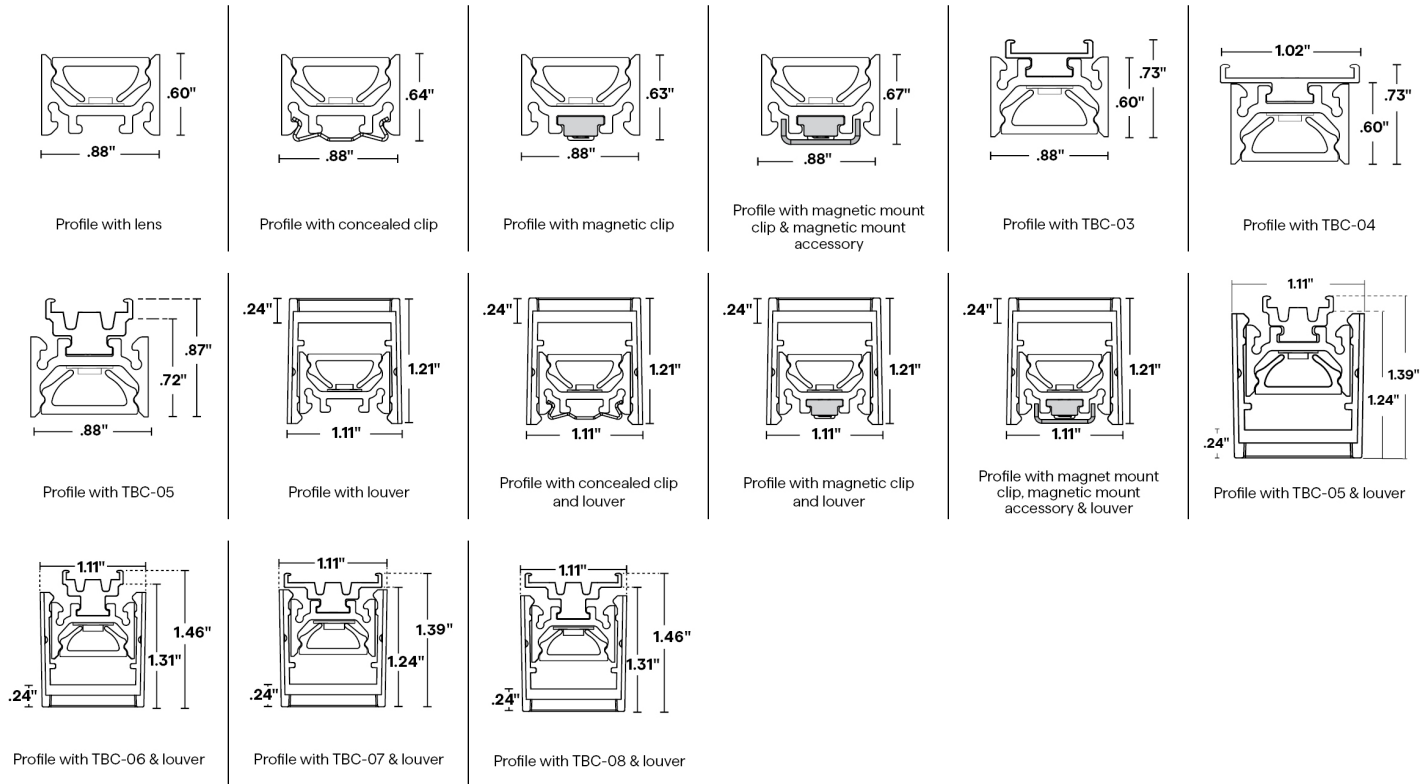

## 2 DELIVERED LUMENS


[Calculated L70 = 70000 hrs]  
Tested with VERS-02-WD-\*\*-30-DRY

|    | 6.0 W/FT |     |
|----|----------|-----|
|    | LM/FT    | CRI |
| PR | 483      | 97  |
| DF | 447      | 97  |

[Calculated L70 = 70000 hrs]  
Tested with VERS-02-DW-\*\*-30-DRY


|    | 1.5HE W/FT |     | 2.5HE W/FT |     | 4.0HE W/FT |     |
|----|------------|-----|------------|-----|------------|-----|
|    | LM/FT      | CRI | LM/FT      | CRI | LM/FT      | CRI |
| PR | 154        | 98  | 248        | 98  | 381        | 98  |
| DF | 148        | 98  | 234        | 98  | 358        | 98  |

## 5 DIODE VISIBILITY



## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.





# VERS-FLUSH (02) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

## TEMPERATURE RATINGS


| DRY | Ambient Operating Temp - Surface | WD 6.0 W/FT                           |       | DW 1.5 HE W/FT                     |       | DW 3.0 HE W/FT                        |       | DW 2.5 HE W/FT                     |       | DW 5.0 HE W/FT                        |       | DW 4.0 HE W/FT                     |       | DW 8.0 HE W/FT                        |       |
|-----|----------------------------------|---------------------------------------|-------|------------------------------------|-------|---------------------------------------|-------|------------------------------------|-------|---------------------------------------|-------|------------------------------------|-------|---------------------------------------|-------|
|     |                                  | QTL power supply other than DALI, DMX |       | DALI, DMX, or non-QTL power supply |       | QTL power supply other than DALI, DMX |       | DALI, DMX, or non-QTL power supply |       | QTL power supply other than DALI, DMX |       | DALI, DMX, or non-QTL power supply |       | QTL power supply other than DALI, DMX |       |
|     |                                  | Min                                   | Max   | Min                                | Max   | Min                                   | Max   | Min                                | Max   | Min                                   | Max   | Min                                | Max   | Min                                   | Max   |
|     |                                  | -4°F                                  | 115°F | -4°F                               | 145°F | -4°F                                  | 135°F | -4°F                               | 135°F | -4°F                                  | 120°F | -4°F                               | 125°F | -4°F                                  | 110°F |

## 6 EXTERNAL LOUVER

PLASTIC

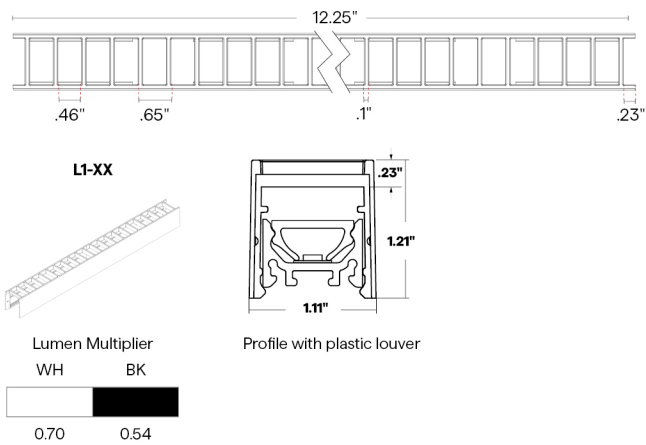


## METAL

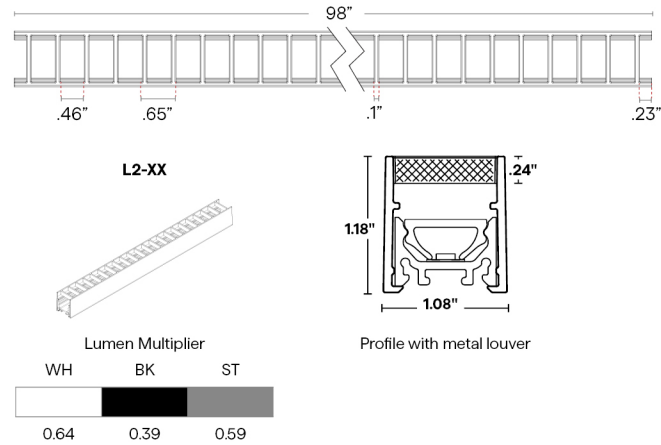


## 7 WIRE INPUT/OUTPUT

### SINGLE (Input only)



### PASS THROUGH (Input/Output)






# VERS-FLUSH (02) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

## CONFIGURATION OPTIONS

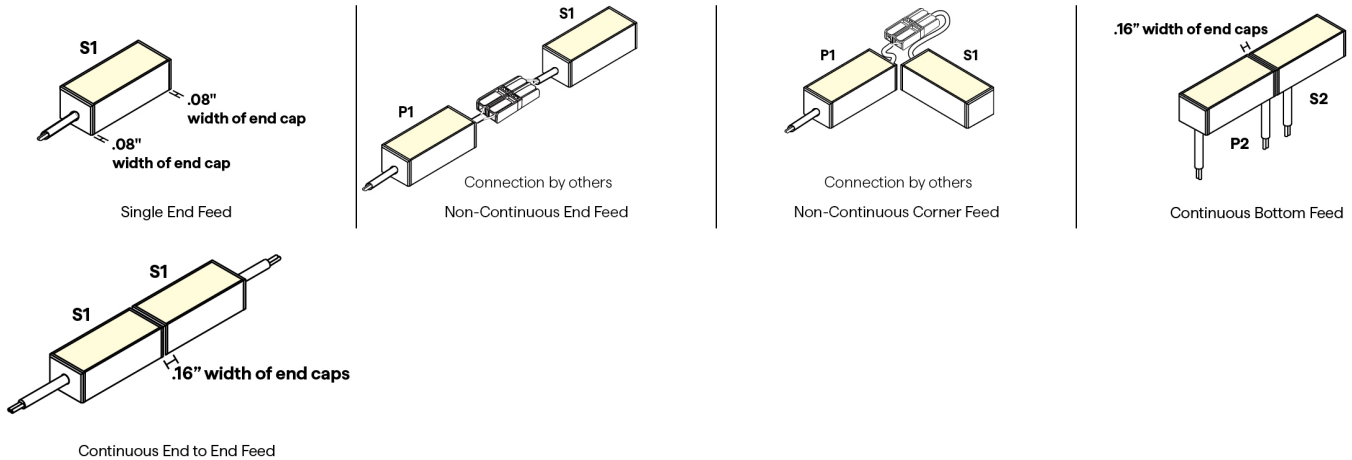

## 8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product.

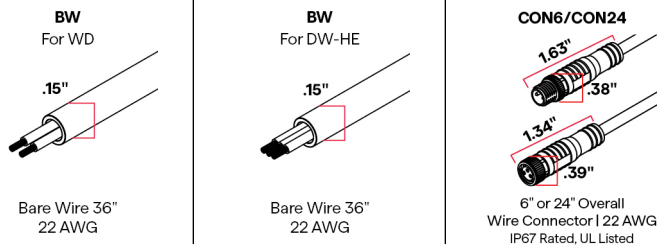

## 10 WIRE COLOR



## 12 MOUNTING

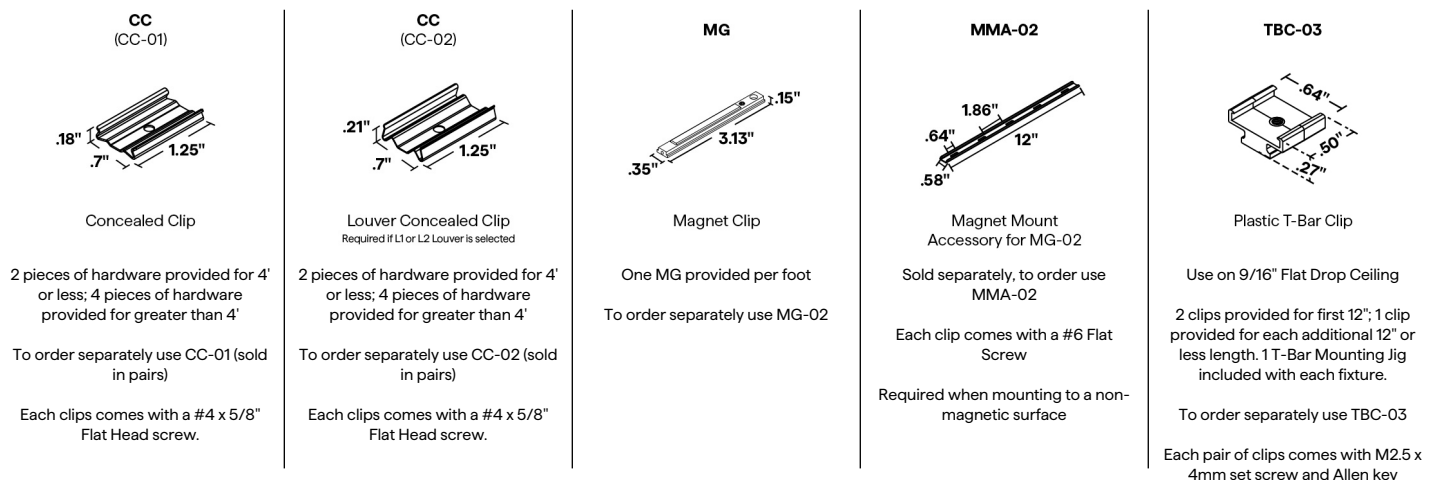



# VERS-FLUSH (02) FOR WARM DIM APPLICATIONS

## 24VDC Linear Fixtures - Surface & Recessed

### MOUNTING CONTINUED

|  |   |   |   |  |
|--|---|---|---|--|
| <p><b>TBC-04</b></p>  <p>Plastic T-Bar Clip</p> <p>Use on 15/16" Flat or Tegular Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-04</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p> | <p><b>TBC-05</b></p>  <p>Plastic T-Bar Clip</p> <p>Use on 9/16" Tegular Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-05</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p> | <p><b>TBC-06</b></p>  <p>Plastic T-Bar Clip</p> <p>Use with Louver on 9/16" Tegular Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-06</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p> | <p><b>TBC-07</b></p>  <p>Plastic T-Bar Clip</p> <p>Use with Louver on 15/16" Flat Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-07</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p> | <p><b>TBC-08</b></p>  <p>Plastic T-Bar Clip</p> <p>Use with Louver on 15/16" Tegular Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-08</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p> |
|--|---|---|---|--|

### 13 FINISH

|  |        |
|--|--------|
|  | Satin  |
|  | Black  |
|  | Bronze |
|  | White  |

Custom finishes require a longer lead time, consult factory

### 15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.





# VERS-FLUSH (02) FOR WARM DIM APPLICATIONS





24VDC Linear Fixtures - Surface & Recessed

## WD DRY LENGTHS BY INCH

### EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture<br> |
|------------------|---|
| 12"              | 1"  |
| 13"              | 0.5"  |
| 14"              | 1"  |
| 15"              | 0.5"  |
| 16"              | 1"  |
| 17"              | 0.5"  |
| 18"              | 1"  |
| 19"              | 0.5"  |
| 20"              | 1"  |
| 21"              | 0.5"  |
| 22"              | 1"  |
| 23"              | 0.5"  |
| 24"              | 1"  |
| 36"              | 1"  |
| 48"              | 1"  |
| 60"              | 1"  |
| 72"              | 1"  |
| 84"              | 1"  |
| 96"              | 1"  |

### OPTIMAL LENGTH





| Requested Nominal Length | S1 & S2<br><br>End Feed | <br>Bottom Feed | P1 & P2<br><br>End Feed | <br>Bottom Feed |
|--------------------------|--|--|--|---|
| 12"                      | 10.49"   |  | 10.74"   |   |
| 13"                      | 12.49"   |  | 12.74"   |   |
| 14"                      | 12.49"   |  | 12.74"   |   |
| 15"                      | 14.49"   |  | 14.74"   |   |
| 16"                      | 14.49"   |  | 14.74"   |   |
| 17"                      | 16.49"   |  | 16.74"   |   |
| 18"                      | 16.49"   |  | 16.74"   |   |
| 19"                      | 18.49"   |  | 18.74"   |   |
| 20"                      | 18.49"   |  | 18.74"   |   |
| 21"                      | 20.49"   |  | 20.74"   |   |
| 22"                      | 20.49"   |  | 20.74"   |   |
| 23"                      | 22.49"   |  | 22.74"   |   |
| 24"                      | 22.49"   |  | 22.74"   |   |
| 36"                      | 34.49"   |  | 34.74"   |   |
| 48"                      | 46.49"   |  | 46.74"   |   |
| 60"                      | 58.49"   |  | 58.74"   |   |
| 72"                      | 70.49"   |  | 70.74"   |   |
| 84"                      | 82.49"   |  | 82.74"   |   |
| 96"                      | 94.49"   |  | 94.74"   |   |

## DW-HE DRY LENGTHS BY INCH

### EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture<br> |
|------------------|---|
| 12"              | 1"  |
| 13"              | 0.5"  |
| 14"              | 1"  |
| 15"              | 0.5"  |
| 16"              | 1"  |
| 17"              | 0.5"  |
| 18"              | 1"  |
| 19"              | 0.5"  |
| 20"              | 1"  |
| 21"              | 0.5"  |
| 22"              | 1"  |
| 23"              | 0.5"  |
| 24"              | 1"  |
| 36"              | 1"  |
| 48"              | 1"  |
| 60"              | 1"  |
| 72"              | 1"  |
| 84"              | 1"  |
| 96"              | 1"  |

### OPTIMAL LENGTH

| Requested Nominal Length | S1 & S2<br><br>End Feed | <br>Bottom Feed | P1 & P2<br><br>End Feed | <br>Bottom Feed |
|--------------------------|--|--|--|---|
| 12"                      | 10.59"   |  | 10.94"   |   |
| 13"                      | 12.59"   |  | 12.94"   |   |
| 14"                      | 12.59"   |  | 12.94"   |   |
| 15"                      | 14.59"   |  | 14.94"   |   |
| 16"                      | 14.59"   |  | 14.94"   |   |
| 17"                      | 16.59"   |  | 16.94"   |   |
| 18"                      | 16.59"   |  | 16.94"   |   |
| 19"                      | 18.59"   |  | 18.94"   |   |
| 20"                      | 18.59"   |  | 18.94"   |   |
| 21"                      | 20.59"   |  | 20.94"   |   |
| 22"                      | 20.59"   |  | 20.94"   |   |
| 23"                      | 22.59"   |  | 22.94"   |   |
| 24"                      | 22.59"   |  | 22.94"   |   |
| 36"                      | 34.59"   |  | 34.94"   |   |
| 48"                      | 46.59"   |  | 46.94"   |   |
| 60"                      | 58.59"   |  | 58.94"   |   |
| 72"                      | 70.59"   |  | 70.94"   |   |
| 84"                      | 82.59"   |  | 82.94"   |   |
| 96"                      | 94.59"   |  | 94.94"   |   |



# VERS-FLUSH (02) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIM TO LEVEL | INDOOR   |   |
|--------------|--|---|
|              | DW-HE Warm Dim Applications  | WD  |
| 0.1%         | QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT8<br>QT-CAB-eLED+DALI-DT8-AWN<br>QT-CAB-eLED+WD<br>QT-CAB-eLED+WD-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT8<br>QTM-eLED+DALI-DT8-AWN<br>QTM-eLED+WD<br>QTM-eLED+WD-AWN<br>QZ-DW | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-BOWTIE+DIMMER<br>QZ-DMX<br>QZ-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP |
| 1%           | QZ-DALI-DT8  | QTM-eLED(E)<br>QZ-DALI-DT6  |
| 10%          | Non-Dim Power Supply with WD App Dongle  | Non-Dim Power Supply with SW App Dongle   |













| DIMMING PROTOCOL  | INDOOR  |   |
|---|---|---|
|   | DW-HE Warm Dim Applications   | WD  |
| Phase   | QZ-DW   | QT-CAB-QZ-PH/0-10V<br>QTM-eLED(E)<br>QZ-BOWTIE+DIMMER<br>QZ-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP             |
| 0-10V   | QT-CAB-eLED+WD<br>QT-CAB-eLED+WD-AWN<br>QTM-eLED+WD<br>QTM-eLED+WD-AWN<br>QZ-DW                               | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QTM-eLED+0-10V<br>QZ-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP         |
| Lutron Athena   | QT-CAB-eLED+DALI-DT8-AWN<br>QT-CAB-eLED+WD-AWN<br>QTM-eLED+DALI-DT8-AWN<br>QTM-eLED+WD-AWN                    | QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+DALI-DT6-AWN   |
| ECO System  |   | QTM-eLED(E)   |
| DMX<br>If using DW LED,<br>wattage must be<br>doubled                           |   | QZ-DMX  |
| DALI-2: DT6<br>If using DW LED,<br>wattage must be<br>doubled except for<br>AWN | QT-CAB-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6   | QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-DALI-DT6 |
| DALI-2: DT8<br>If using DW LED,<br>wattage must be<br>doubled except for<br>AWN | QT-CAB-eLED+DALI-DT8<br>QT-CAB-eLED+DALI-DT8-AWN<br>QTM-eLED+DALI-DT8<br>QTM-eLED+DALI-DT8-AWN<br>QZ-DALI-DT8 |   |
| SCENE App Dimmed  | Non-Dim Power Supply with WD App Dongle   | Non-Dim Power Supply with SW App Dongle   |





# VERS-FLUSH (02) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE MOUNTING ACCESSORIES

|  |  |   |  |  |  |   |  |  |  |
|--|--|---|--|--|--|---|--|--|--|
| <b>HINGE - HMB-M</b><br><br>1.41"<br>.71"<br>Adjustable mounting bracket - Medium | <b>HINGE - HMB-L</b><br><br>1.46" 1.29"<br>Adjustable mounting bracket - Large        | <b>HINGE - HMB-XL</b><br><br>4"<br>1.46"<br>Adjustable mounting bracket - XLarge | <b>Q-PIVOT</b><br><br>.75"<br>1.03"<br>Small mounting accessory | <b>Q-ANGLE</b><br><br>2.23"<br>1.38"<br>Adjustable mounting accessory | <b>NJ-LARGE</b><br><br>J Mounting Bracket | <b>NU-LARGE</b><br><br>U Mounting Bracket | <b>SD-J-LARGE</b><br><br>J Mounting Bracket | <b>BL-LARGE</b><br><br>Backwards L Mounting Bracket | <b>NL-LARGE</b><br><br>L Mounting Bracket |
| <b>SD-L-LARGE</b><br><br>L Mounting Bracket                                       | <b>MMA-02</b><br><br>1.86"<br>12"<br>.64"<br>.58"<br>Magnet Mount Accessory for MG-02 |   |  |  |  |   |  |  |  |

## COMPATIBLE WIRING ACCESSORIES

|   |   |
|---|---|
| <b>Q-mini-J</b><br><br>2"<br>1.25"<br>UL Listed, miniature junction box, DRY/DMP (WET rated with silicone) | <b>Q-mini-J5</b><br><br>2.80"<br>2.27"<br>UL Listed, miniature junction box, DRY/DMP (WET rated with silicone) |
|---|---|

## COMPATIBLE CONTROL ACCESSORIES

|   |
|---|
| <b>SCENE APP DONGLE</b><br><br>1.36"<br>2.58"<br>Wi-Fi or Bluetooth Connectivity |
|---|

## COMPATIBLE APPS

|   |
|---|
| <b>NFC APP</b><br><br>Q-NFC<br>Read and write DMX addresses and adjust voltage |
|---|