




VERS-FLUSH (02) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

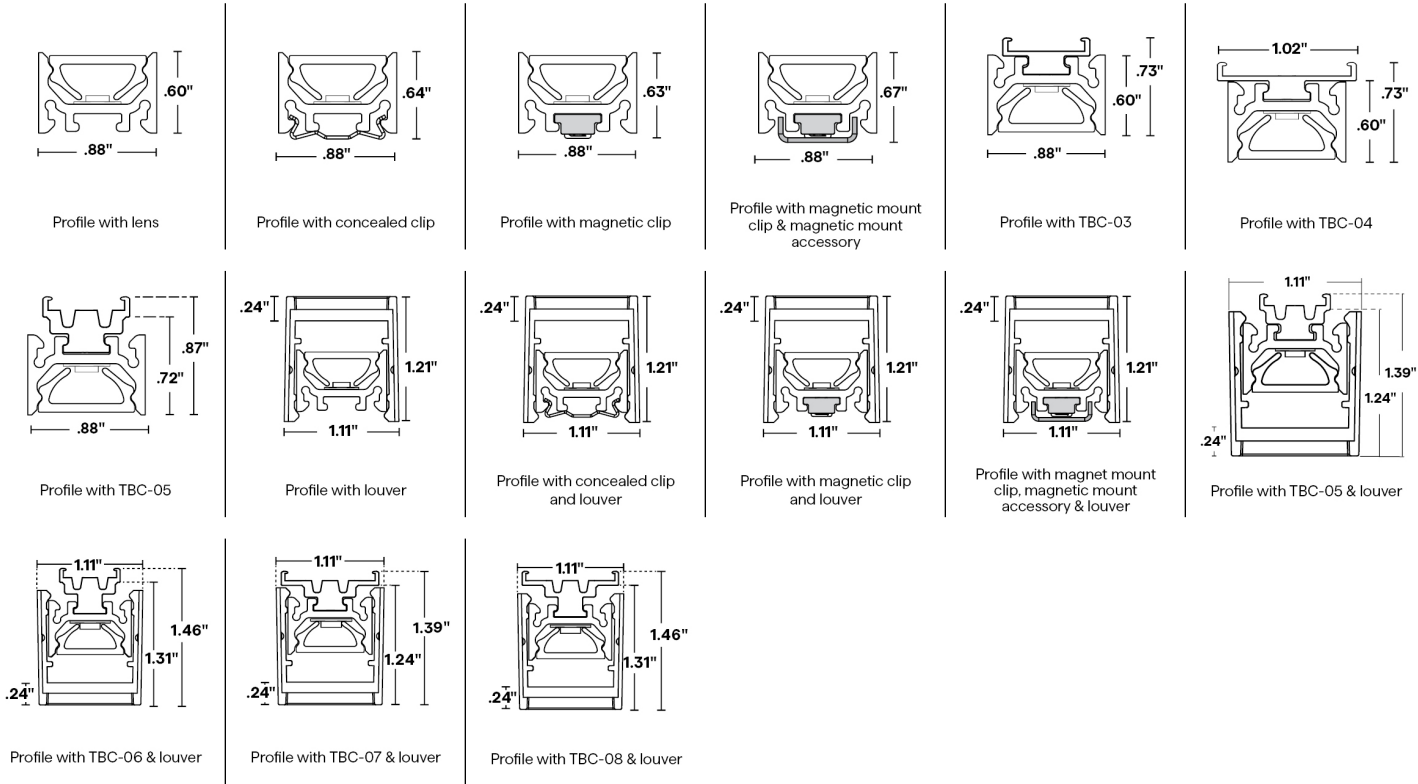


2 DELIVERED LUMENS

[Calculated L70 = 50000 hrs]
Tested with VERS-02-SC-5.0-**-DRY


	Red		Green		Blue		Amber	
	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength
PR	120	634	561	519	127	467	88	595
DF	114	634	530	519	119	467	83	595

5 DIODE VISIBILITY



PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

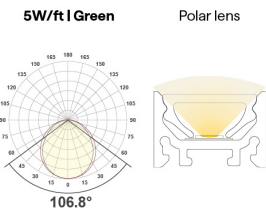



VERS-FLUSH (02) STATIC COLOR


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS


DRY	Ambient Operating Temp - Surface	5.0 W/FT	
		Min	Max
		-4°F	125°F

6 EXTERNAL LOUVER

PLASTIC

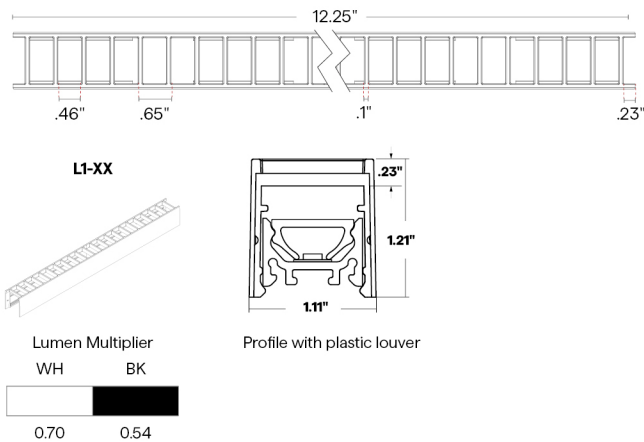


METAL

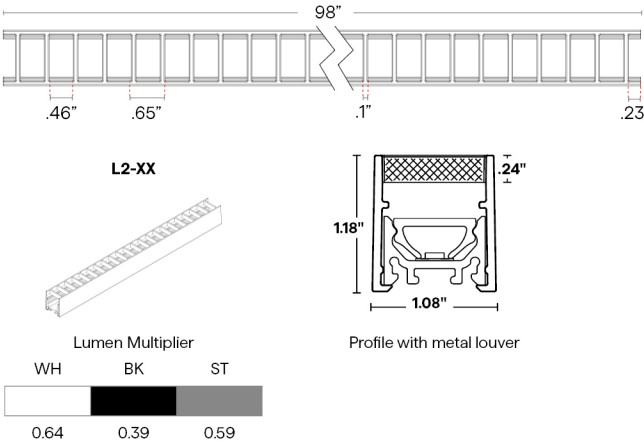


7 WIRE INPUT/OUTPUT

SINGLE (Input only)

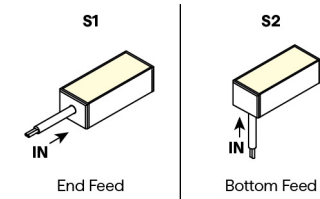

PASS THROUGH (Input/Output)

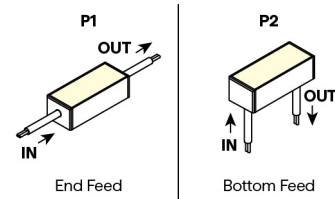




VERS-FLUSH (02) STATIC COLOR


24VDC Linear Fixtures - Surface & Recessed

CONFIGURATION OPTIONS

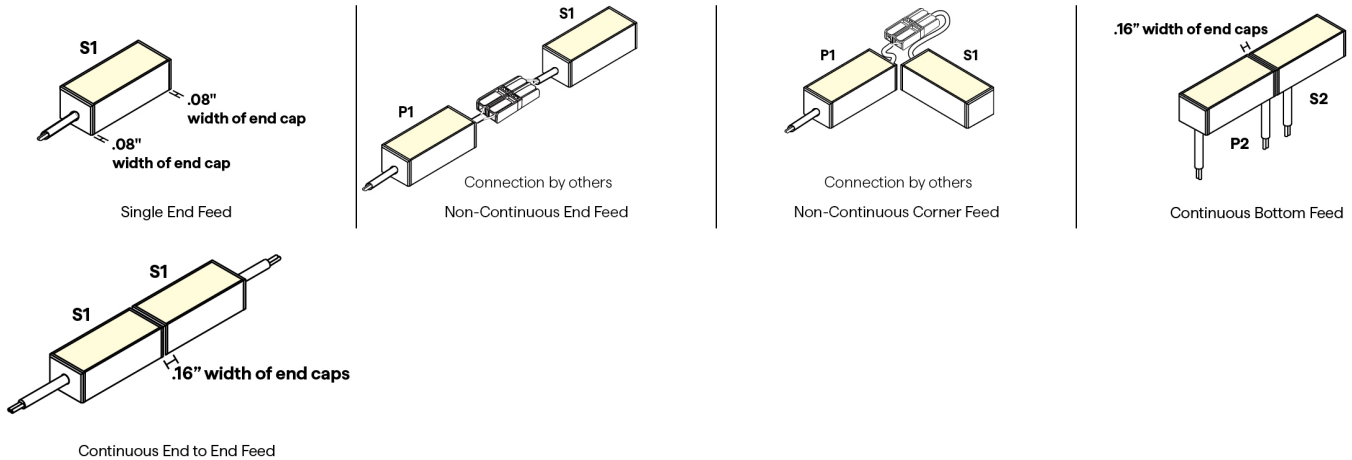

8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product.

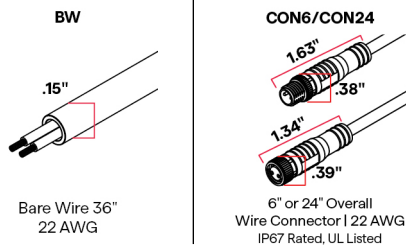

10 WIRE COLOR



12 MOUNTING

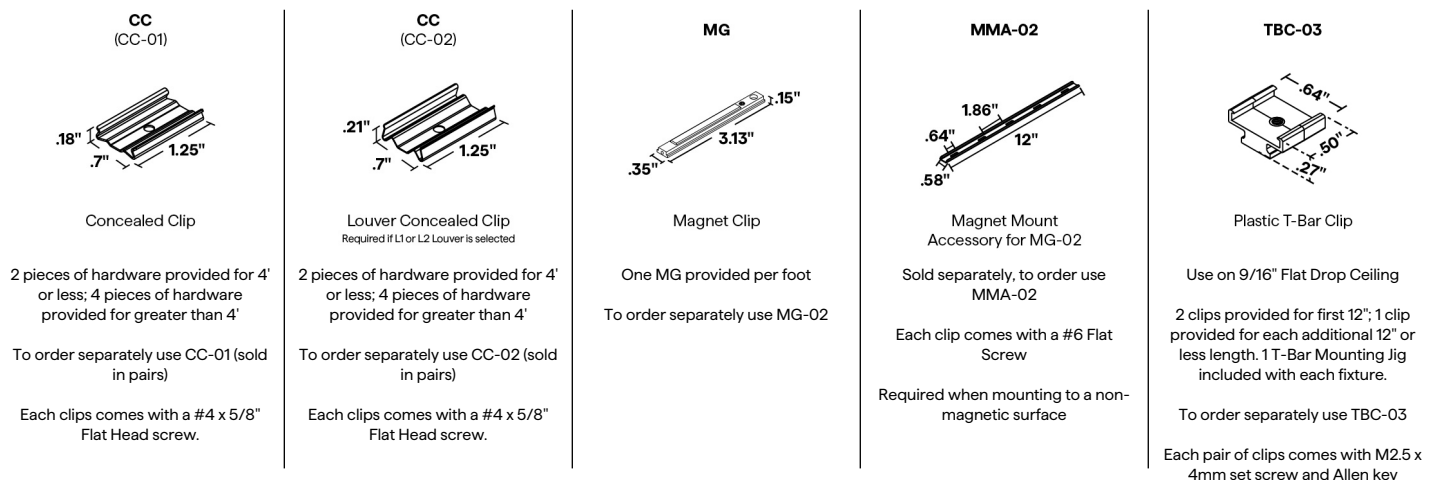



VERS-FLUSH (02) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

MOUNTING CONTINUED

<p>TBC-04</p>  <p>Plastic T-Bar Clip</p> <p>Use on 15/16" Flat or Tegular Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-04</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	<p>TBC-05</p>  <p>Plastic T-Bar Clip</p> <p>Use on 9/16" Tegular Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-05</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	<p>TBC-06</p>  <p>Plastic T-Bar Clip</p> <p>Use with Louver on 9/16" Tegular Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-06</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	<p>TBC-07</p>  <p>Plastic T-Bar Clip</p> <p>Use with Louver on 15/16" Flat Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-07</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	<p>TBC-08</p>  <p>Plastic T-Bar Clip</p> <p>Use with Louver on 15/16" Tegular Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-08</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>
--	---	---	---	--

13 FINISH

	Satin
	Black
	Bronze
	White

Custom finishes require a longer lead time, consult factory

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.





VERS-FLUSH (02) STATIC COLOR





24VDC Linear Fixtures - Surface & Recessed

SC DRY LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture S1  End Feed
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 S1  End Feed S2  Bottom Feed	P1 & P2 P1  End Feed P2  Bottom Feed
12"	10.49"	10.74"
13"	12.49"	12.74"
14"	12.49"	12.74"
15"	14.49"	14.74"
16"	14.49"	14.74"
17"	16.49"	16.74"
18"	16.49"	16.74"
19"	18.49"	18.74"
20"	18.49"	18.74"
21"	20.49"	20.74"
22"	20.49"	20.74"
23"	22.49"	22.74"
24"	22.49"	22.74"
36"	34.49"	34.74"
48"	46.49"	46.74"
60"	58.49"	58.74"
72"	70.49"	70.74"
84"	82.49"	82.74"
96"	94.49"	94.74"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	SC
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle















VERS-FLUSH (02) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR
	SC
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)
DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M  1.41" .71" Adjustable mounting bracket - Medium	HINGE - HMB-L  1.46" 1.29" Adjustable mounting bracket - Large	HINGE - HMB-XL  4" 1.46" Adjustable mounting bracket - XLarge	Q-PIVOT  .75" 1.03" Small mounting accessory	Q-ANGLE  2.23" 1.38" Adjustable mounting accessory	NJ-LARGE  J Mounting Bracket	NU-LARGE  U Mounting Bracket	SD-J-LARGE  J Mounting Bracket	BL-LARGE  Backwards L Mounting Bracket	NL-LARGE  L Mounting Bracket
SD-L-LARGE  L Mounting Bracket	MMA-02  1.86" 12" .64" .58" Magnet Mount Accessory for MG-02								



VERS-FLUSH (02) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE WIRING ACCESSORIES

Q-mini-J  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	Q-mini-J5  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	CON120-EXT  10ft Con cable extender DRY/DMP/WET	CON FOUR-FER  Splits lead from one to four LED Con connectors DRY/DMP/WET	CON M - BARREL F  Male con to barrel cable adaptor DRY/DMP
--	---	--	--	---

COMPATIBLE APPS

NFC APP

Read and write DMX addresses and adjust voltage