





VERS-NANO-LOUVER (11) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed



- Features a co-extruded lens with integrated louvers that provide 35° viewing angles, delivering exceptional glare control ideal for direct view applications.
- The Crosswise louver reduces end-view glare while the Lengthwise louver reduces side-view glare.
- Lens options include frosted or diffused finishes to suit various lighting requirements.
- Integrated metal endcaps combined with extruded aluminum housing give this LED fixture a polished modern look.
- White Optics, an internal coating that results in greater lumen output, comes standard in all VERS LED fixtures.
- Consult factory for field assembly options.
- Can be suitable for exterior use when specified as wet, contact factory for more information.
- QTL Red & Amber LED products are FWC certified, making them safe for turtles and other wildlife.

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
PRODUCT	WATTS/ FT	CCT	RATED	INTERNAL LENS	INTERNAL LOUVER	WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL
VERS-11-SC	5.0													

Sample Part Number: **VERS-11-SC-5.0-G-DRY-DF-L3-C-P1A-BW-BW-BK-CL2-CC-BK-48"-E**

1

PRODUCT

VERS-11-SC

See following pages for compatible power supplies.

2

WATTS/FT

5.0

5.0W/ft

3

CCT

A

Amber

B

Blue

G

Green

R

Red

4

RATED

DRY

IP20

DMP

IP54

WET

IP67

Can be suitable for exterior use, contact factory for more information

5

INTERNAL LENS

DF

Diffused Internal

FR

Frosted Internal

For representation of LED visibility, see Diode Visibility section on following pages.

For beam angles, see Photometric Performance section on following pages.

See VERS-04 for additional 25° lens option.

6

INTERNAL LOUVER

C

Crosswise Internal

L

Lengthwise Internal

Louver slats are angled. Refer to diagrams to identify the side of the fixture with the most visual cutoff.

7

WIRE INPUT/OUTPUT

S1A

Single 1 (Input only) - End Feed

S1B

Single 1 (Input only) - End Feed

S2A

Single 2 (Input only) - Bottom Feed

S2B

Single 2 (Input only) - Bottom Feed

P1A

Pass Through 1 (Input/output) - End Feed

P1B

Pass Through 1 (Input/output) - End Feed

P2A

Pass Through 2 (Input/output) - Bottom Feed

P2B

Pass Through 2 (Input/output) - Bottom Feed

8

CONNECTOR/WIRE IN

BW

Bare Wire (Standard 36")

CON6

Connector 6"

CON24

Connector 24"

BW

Bare Wire (Standard 36")

CON6

Connector 6"

CON24

Connector 24"

9

CONNECTOR/WIRE OUT

CLS

Closed End (No feed)

BW

Bare Wire (Standard 36")

CON6

Connector 6"

CON24

Connector 24"

10

WIRE COLOR

WH

White

BK

Black

11

WIRE TYPE

CL2

Class 2

CL2P

Plenum Rated

CL2P only available with bare wire leads (BW)

12

MOUNTING

CC

Concealed Clip

MG

Magnet

TBC-03

9/16" Flat TB-Grid

TBC-04

15/16" Flat or Tegular TB-Grid

TBC-05

9/16" Tegular TB-Grid or 9/16" Flat TB-Grid, with External Louver

13

FINISH

ST

Satin

BK

Black

BZ

Bronze

WH

White

CU

Custom

Finish is only applicable to the aluminum extrusion and endcaps. The Cover Lens and Internal Louver is always black. Custom finishes require a longer lead time, consult factory. Any white finish other than RAL 9003 must be custom ordered

14

LENGTH (IN)

Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".

15

EXACT/OPTIMAL

O

Optimal Illumination

E

Exact Specified Length

Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.

When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.

BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)


BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)




VERS-NANO-LOUVER (11) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed


1 PRODUCT - DIMENSIONS




Profile with lens



Profile with concealed clip




Profile with magnetic clip




Profile with magnet mount clip & magnetic mount accessory



Profile with TBC-03



Profile with TBC-04



Profile with TBC-05

2 DELIVERED LUMENS

[Calculated L70 = 50000 hrs]
Tested with VERS-11-SC-5.0-**-DRY

5.0 W/FT	Red			Green			Blue			Amber		
	LM/FT	Wavelength	UGR	LM/FT	Wavelength	UGR	LM/FT	Wavelength	UGR	LM/FT	Wavelength	UGR
FR-C	33	632	≤ 6.6	112	516	≤ 11.0	31	465	≤ 7.2	22	595	≤ 5.7
FR-L	47	632	≤ 14.9	168	516	≤ 20.0	45	465	≤ 14.8	33	595	≤ 13.9
DF-C	30	632	≤ 10.5	102	516	≤ 14.6	28	465	≤ 10.4	20	595	≤ 8.8
DF-L	37	632	≤ 13.4	129	516	≤ 18.2	32	465	≤ 13.0	26	595	≤ 12.3

5 DIODE VISIBILITY




DF - Diffused lens

FR - Frosted lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.





VERS-NANO-LOUVER (11) STATIC COLOR


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS


		5.0 W/FT	
		Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	125°F
DMP	Ambient Operating Temp - Surface	-4°F	120°F
WET	Ambient Operating Temp - Surface	-4°F	120°F

6 INTERNAL LOUVER

INTERNAL LOUVER - LENGTHWISE

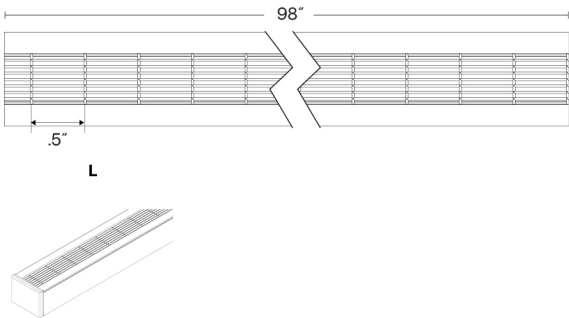


INTERNAL LOUVER - CROSSWISE

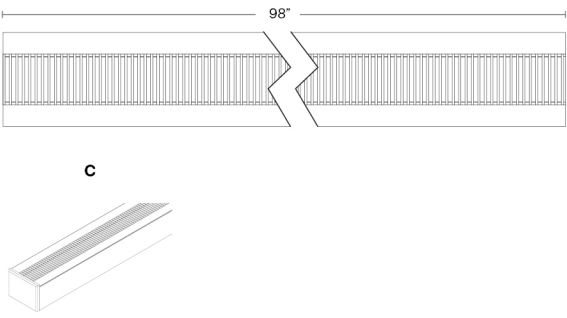

7 WIRE INPUT/OUTPUT


LENGTHWISE - SINGLE (Input only)

Reduced Side View Glare - Louver slats are angled towards one side of the fixture. Refer to diagrams to identify the side of the fixture with the most visual cutoff.

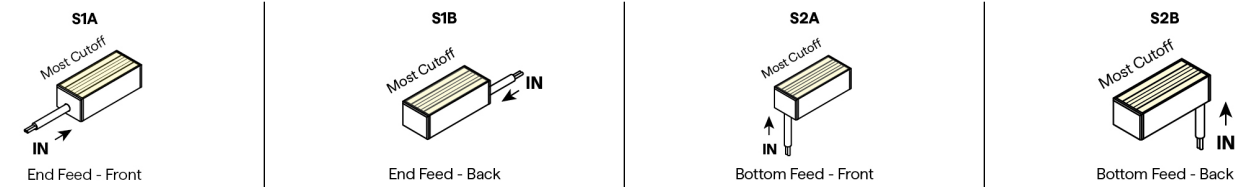

LENGTHWISE - PASS THROUGH (Input /Output)

Reduced Side View Glare - Louver slats are angled towards one side of the fixture. Refer to diagrams to identify the side of the fixture with the most visual cutoff.

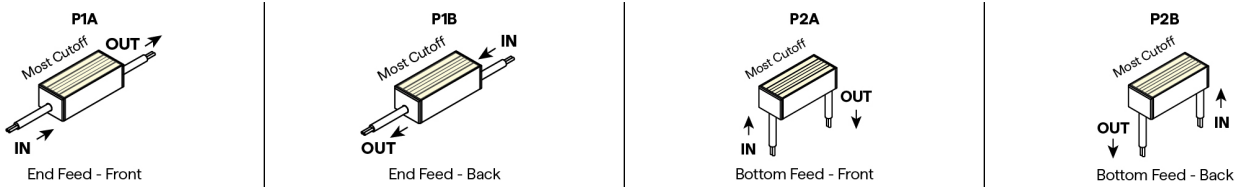







VERS-NANO-LOUVER (11) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed





CROSSWISE - SINGLE (Input only)

Reduced End View Glare - Louver slats are angled towards one end of the fixture. Refer to diagrams to identify the side of the fixture with the most visual cutoff.



CROSSWISE - PASS THROUGH (Input /Output)









Reduced End View Glare - Louver slats are angled towards one end of the fixture. Refer to diagrams to identify the side of the fixture with the most visual cutoff.



CONFIGURATION OPTIONS

LENGTHWISE

Reduced Side View Glare - Louver slats are angled towards one side of the fixture. Refer to diagrams to identify the side of the fixture with the most visual cutoff.






VERS-NANO-LOUVER (11) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed


CROSSWISE

Reduced End View Glare - Louver slats are angled towards one end of the fixture. Refer to diagrams to identify the side of the fixture with the most visual cutoff.

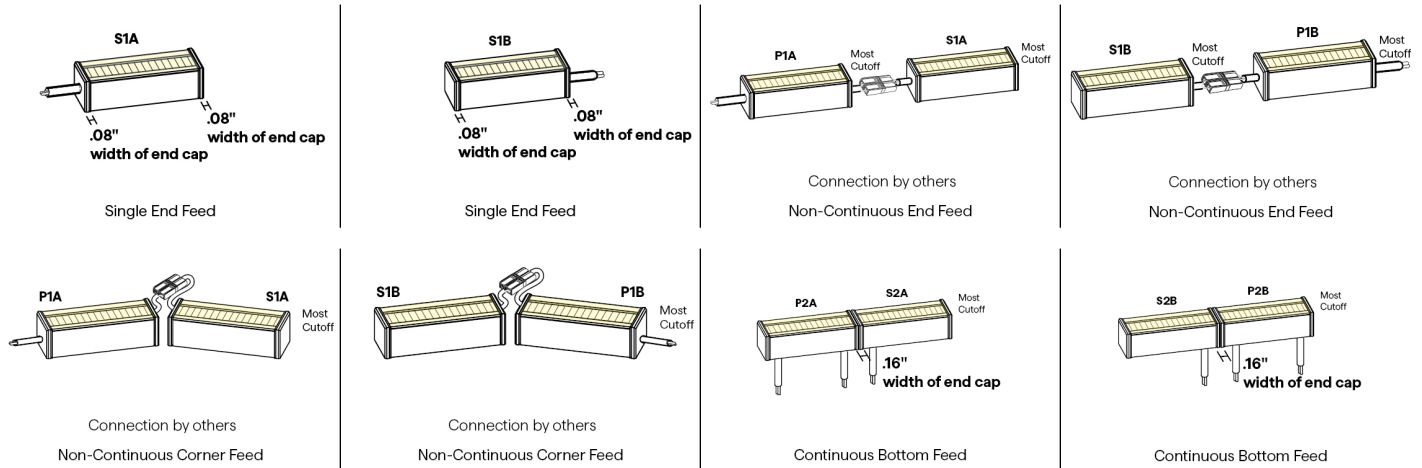


8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product.

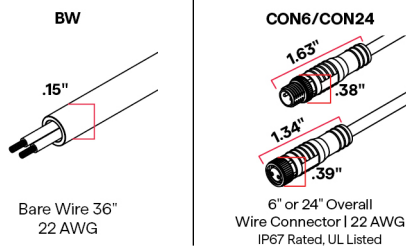

10 WIRE COLOR



12 MOUNTING

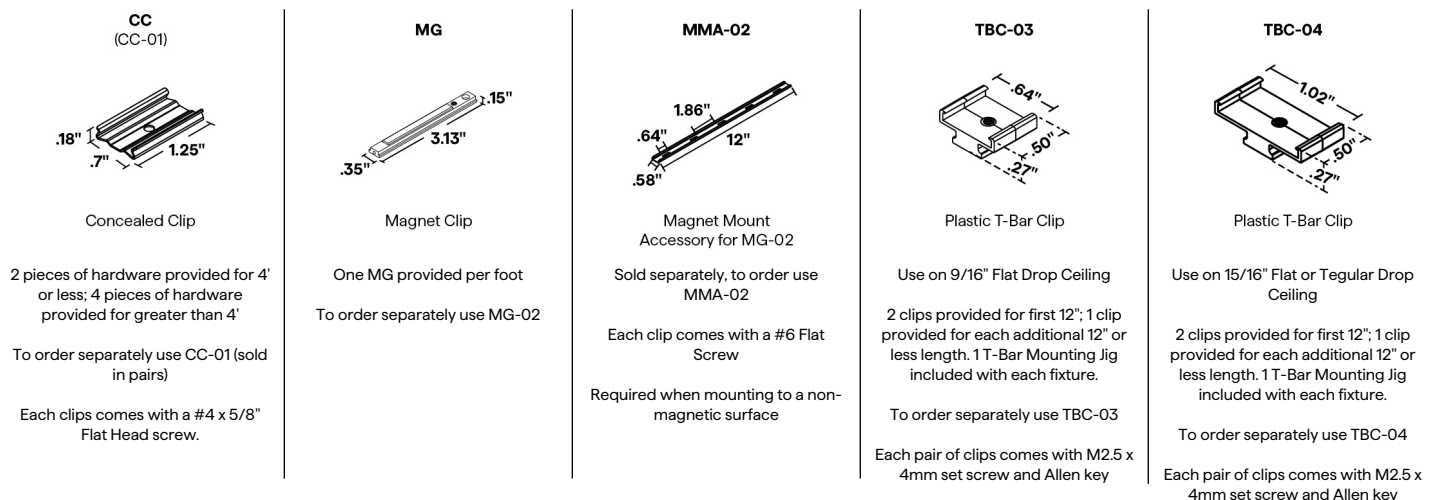




VERS-NANO-LOUVER (11) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

MOUNTING CONTINUED

TBC-05



Plastic T-Bar Clip


Use on 9/16" Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-05

Each pair of clips comes with M2.5 x 4mm set screw and Allen key


13 FINISH



Custom finishes require a longer lead time, consult factory. Finish is only applicable to the aluminum extrusion and endcaps. The Cover Lens and Internal Louver is always black.

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

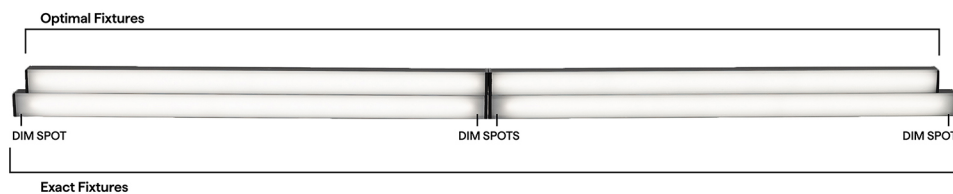




VERS-NANO-LOUVER (11) STATIC COLOR





24VDC Linear Fixtures - Surface & Recessed

SC DRY DMP LENGTHS BY INCH

EXACT LENGTH


Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH





Requested Nominal Length	S1A/B & S2A/B		P1A/B & P2A/B	
				
12"	10.49"		10.74"	
13"	12.49"		12.74"	
14"	12.49"		12.74"	
15"	14.49"		14.74"	
16"	14.49"		14.74"	
17"	16.49"		16.74"	
18"	16.49"		16.74"	
19"	18.49"		18.74"	
20"	18.49"		18.74"	
21"	20.49"		20.74"	
22"	20.49"		20.74"	
23"	22.49"		22.74"	
24"	22.49"		22.74"	
36"	34.49"		34.74"	
48"	46.49"		46.74"	
60"	58.49"		58.74"	
72"	70.49"		70.74"	
84"	82.49"		82.74"	
96"	94.49"		94.74"	

SC WET LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1A/B & S2A/B		P1A/B & P2A/B	
				
12"	10.69"		10.84"	
13"	12.69"		12.84"	
14"	12.69"		12.84"	
15"	14.69"		14.84"	
16"	14.69"		14.84"	
17"	16.69"		16.84"	
18"	16.69"		16.84"	
19"	18.69"		18.84"	
20"	18.69"		18.84"	
21"	20.69"		20.84"	
22"	20.69"		20.84"	
23"	22.69"		22.84"	
24"	22.69"		22.84"	
36"	34.69"		34.84"	
48"	46.69"		46.84"	
60"	58.69"		58.84"	
72"	70.69"		70.84"	
84"	82.69"		82.84"	
96"	94.69"		94.84"	



VERS-NANO-LOUVER (11) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	SC	SC
Dim to Black	Q6M-DC+CAP QTM-DC+CAP IQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	















VERS-NANO-LOUVER (11) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR	OUTDOOR
	SC	SC
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

COMPATIBLE MOUNTING ACCESSORIES






HINGE - HMB-M  1.41" .71" Adjustable mounting bracket - Medium	HINGE - HMB-L  1.46" 1.29" Adjustable mounting bracket - Large	HINGE - HMB-XL  4" 1.46" Adjustable mounting bracket - XLarge	Q-PIVOT  .75" 1.03" Small mounting accessory	Q-ANGLE  2.23" 1.38" Adjustable mounting accessory	NJ-LARGE  J Mounting Bracket	NU-LARGE  U Mounting Bracket	SD-J-LARGE  J Mounting Bracket	BL-LARGE  Backwards L Mounting Bracket	NL-LARGE  L Mounting Bracket
SD-L-LARGE  L Mounting Bracket	MMA-02  1.86" .64" .58" 12" Magnet Mount Accessory for MG-02								



VERS-NANO-LOUVER (11) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE WIRING ACCESSORIES

<p>Q-mini-J</p>  <p>UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)</p>	<p>Q-mini-J5</p>  <p>UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)</p>	<p>CON120-EXT</p>  <p>10ft Con cable extender DRY/DMP/WET</p>	<p>CON FOUR-FER</p>  <p>Splits lead from one to four LED Con connectors DRY/DMP/WET</p>	<p>CON M - BARREL F</p>  <p>Male con to barrel cable adaptor DRY/DMP</p>
--	---	---	---	--

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage