





VERS-OPTICS (05) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed


1 PRODUCT - DIMENSIONS




Profile with 40D lens




Profile with 50D lens




Profile with concealed clip




Profile with magnetic clip




Profile with magnet mount clip & magnetic mount accessory




Profile with TBC-03




Profile with TBC-04




Profile with TBC-05




Profile with louver




Profile with concealed clip and louver




Profile with magnet mount clip and louver




Profile with magnet mount clip, magnetic mount accessory & louver




Profile with TBC-05 & louver



Profile with TBC-06 & louver



Profile with TBC-07 & louver



Profile with TBC-08 & louver

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with VERS-05-WD-**-30-DRY

| | 6.0 W/FT | |
|-----|----------|-----|
| | LM/FT | CRI |
| 40D | 472 | 97 |
| 50D | 494 | 97 |

[Calculated L70 = 70000 hrs]
Tested with VERS-05-DW-**-30-DRY

| | 1.5HE W/FT | | 2.5HE W/FT | | 4.0HE W/FT | |
|-----|------------|-----|------------|-----|------------|-----|
| | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI |
| 40D | 159 | 98 | 247 | 98 | 384 | 98 |
| 50D | 163 | 98 | 258 | 98 | 398 | 98 |



5 DIODE VISIBILITY



Optical lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.





VERS-OPTICS (05) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS


| DRY | Ambient Operating Temp - Surface | WD 6.0 W/FT | | DW 1.5 HE W/FT | | DW 3.0 HE W/FT | | DW 2.5 HE W/FT | | DW 5.0 HE W/FT | | DW 4.0 HE W/FT | | DW 8.0 HE W/FT | |
|-----|----------------------------------|---------------------------------------|-------|------------------------------------|-------|---------------------------------------|-------|------------------------------------|-------|---------------------------------------|-------|------------------------------------|-------|---------------------------------------|-------|
| | | QTL power supply other than DALI, DMX | | DALI, DMX, or non-QTL power supply | | QTL power supply other than DALI, DMX | | DALI, DMX, or non-QTL power supply | | QTL power supply other than DALI, DMX | | DALI, DMX, or non-QTL power supply | | QTL power supply other than DALI, DMX | |
| | | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| | | -4°F | 115°F | -4°F | 145°F | -4°F | 135°F | -4°F | 135°F | -4°F | 120°F | -4°F | 125°F | -4°F | 110°F |

6 EXTERNAL LOUVER

PLASTIC

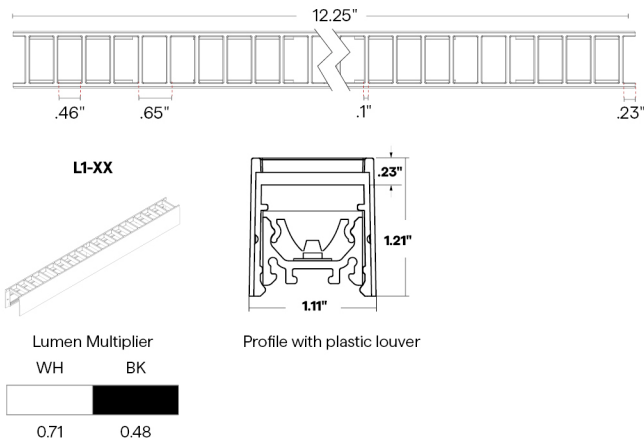


METAL

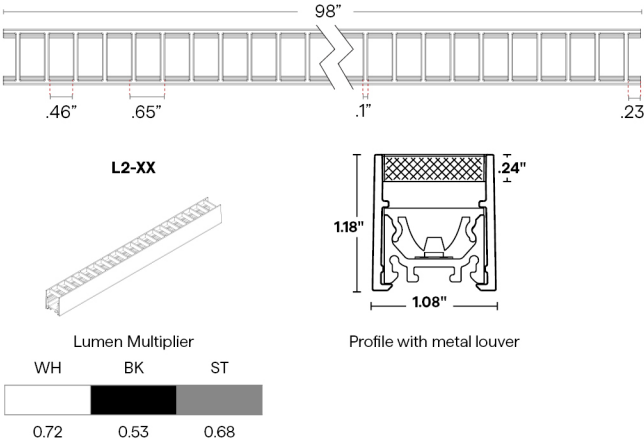


7 WIRE INPUT/OUTPUT

SINGLE (Input only)

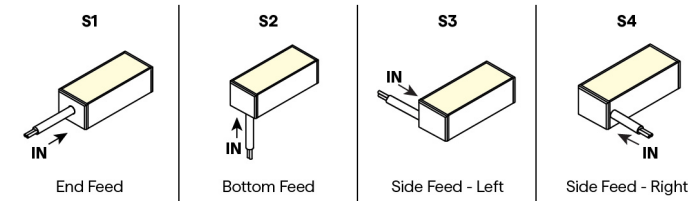

PASS THROUGH (Input/Output)

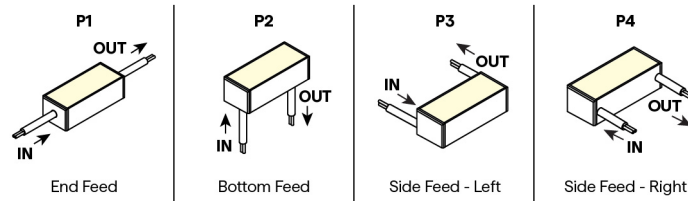



VERS-OPTICS (05) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

CONFIGURATION OPTIONS



8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product.

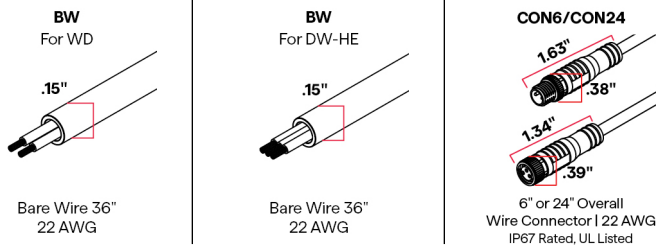

10 WIRE COLOR



12 MOUNTING

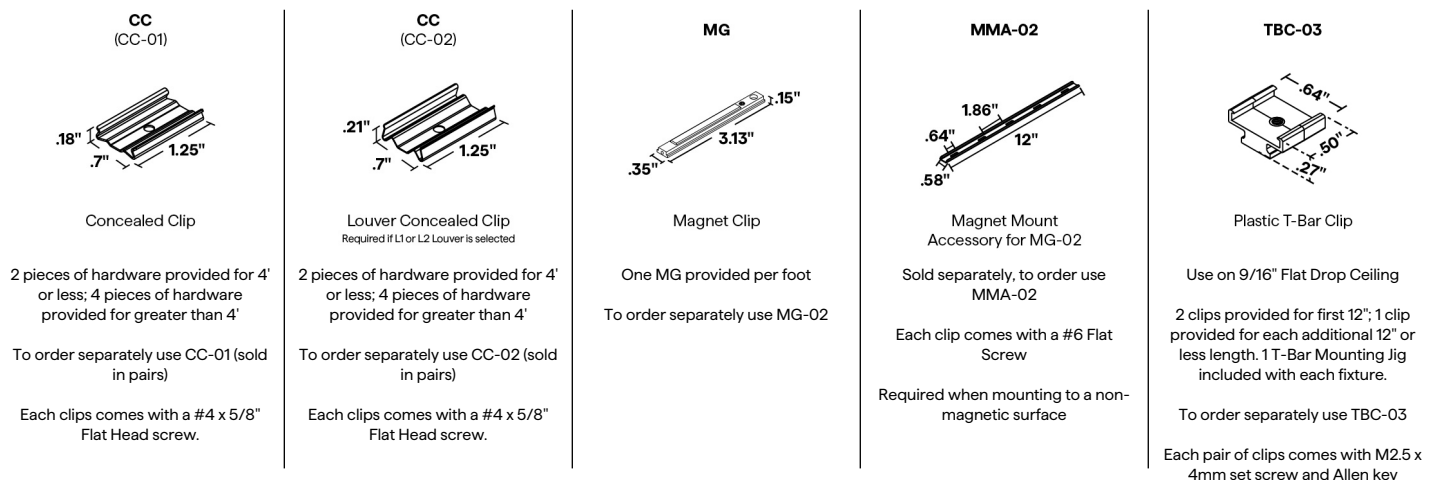




VERS-OPTICS (05) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

MOUNTING CONTINUED

| | | | | |
|--|---|---|---|--|
| <p>TBC-04</p>  <p>Plastic T-Bar Clip</p> <p>Use on 15/16" Flat or Tegular Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-04</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p> | <p>TBC-05</p>  <p>Plastic T-Bar Clip</p> <p>Use on 9/16" Tegular Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-05</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p> | <p>TBC-06</p>  <p>Plastic T-Bar Clip</p> <p>Use with Louver on 9/16" Tegular Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-06</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p> | <p>TBC-07</p>  <p>Plastic T-Bar Clip</p> <p>Use with Louver on 15/16" Flat Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-07</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p> | <p>TBC-08</p>  <p>Plastic T-Bar Clip</p> <p>Use with Louver on 15/16" Tegular Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-08</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p> |
|--|---|---|---|--|

13 FINISH



Custom finishes require a longer lead time, consult factory

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.





VERS-OPTICS (05) FOR WARM DIM APPLICATIONS





24VDC Linear Fixtures - Surface & Recessed

WD DRY LENGTHS BY INCH

EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture  |
|------------------|---|
| 12" | 1" |
| 13" | 0.5" |
| 14" | 1" |
| 15" | 0.5" |
| 16" | 1" |
| 17" | 0.5" |
| 18" | 1" |
| 19" | 0.5" |
| 20" | 1" |
| 21" | 0.5" |
| 22" | 1" |
| 23" | 0.5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |

OPTIMAL LENGTH









| Requested Nominal Length | S1 & S2   | P1 & P2   | S3 & S4   | P3 & P4   |
|--------------------------|--|---|--|--|
| 12" | 10.49" | 10.74" | 10.34" | 10.44" |
| 13" | 12.49" | 12.74" | 12.34" | 12.44" |
| 14" | 12.49" | 12.74" | 12.34" | 12.44" |
| 15" | 14.49" | 14.74" | 14.34" | 14.44" |
| 16" | 14.49" | 14.74" | 14.34" | 14.44" |
| 17" | 16.49" | 16.74" | 16.34" | 16.44" |
| 18" | 16.49" | 16.74" | 16.34" | 16.44" |
| 19" | 18.49" | 18.74" | 18.34" | 18.44" |
| 20" | 18.49" | 18.74" | 18.34" | 18.44" |
| 21" | 20.49" | 20.74" | 20.34" | 20.44" |
| 22" | 20.49" | 20.74" | 20.34" | 20.44" |
| 23" | 22.49" | 22.74" | 22.34" | 22.44" |
| 24" | 22.49" | 22.74" | 22.34" | 22.44" |
| 36" | 34.49" | 34.74" | 34.34" | 34.44" |
| 48" | 46.49" | 46.74" | 46.34" | 46.44" |
| 60" | 58.49" | 58.74" | 58.34" | 58.44" |
| 72" | 70.49" | 70.74" | 70.34" | 70.44" |
| 84" | 82.49" | 82.74" | 82.34" | 82.44" |
| 96" | 94.49" | 94.74" | 94.34" | 94.44" |

DW-HE DRY LENGTHS BY INCH

EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture  |
|------------------|---|
| 12" | 1" |
| 13" | 0.5" |
| 14" | 1" |
| 15" | 0.5" |
| 16" | 1" |
| 17" | 0.5" |
| 18" | 1" |
| 19" | 0.5" |
| 20" | 1" |
| 21" | 0.5" |
| 22" | 1" |
| 23" | 0.5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |

OPTIMAL LENGTH

| Requested Nominal Length | S1 & S2   | P1 & P2   | S3 & S4   | P3 & P4   |
|--------------------------|--|---|--|--|
| 12" | 10.59" | 10.94" | 10.49" | 10.59" |
| 13" | 12.59" | 12.94" | 12.49" | 12.59" |
| 14" | 12.59" | 12.94" | 12.49" | 12.59" |
| 15" | 14.59" | 14.94" | 14.49" | 14.59" |
| 16" | 14.59" | 14.94" | 14.49" | 14.59" |
| 17" | 16.59" | 16.94" | 16.49" | 16.59" |
| 18" | 16.59" | 16.94" | 16.49" | 16.59" |
| 19" | 18.59" | 18.94" | 18.49" | 18.59" |
| 20" | 18.59" | 18.94" | 18.49" | 18.59" |
| 21" | 20.59" | 20.94" | 20.49" | 20.59" |
| 22" | 20.59" | 20.94" | 20.49" | 20.59" |
| 23" | 22.59" | 22.94" | 22.49" | 22.59" |
| 24" | 22.59" | 22.94" | 22.49" | 22.59" |
| 36" | 34.59" | 34.94" | 34.49" | 34.59" |
| 48" | 46.59" | 46.94" | 46.49" | 46.59" |
| 60" | 58.59" | 58.94" | 58.49" | 58.59" |
| 72" | 70.59" | 70.94" | 70.49" | 70.59" |
| 84" | 82.59" | 82.94" | 82.49" | 82.59" |
| 96" | 94.59" | 94.94" | 94.49" | 94.59" |



VERS-OPTICS (05) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIM TO LEVEL | INDOOR | |
|--------------|--|---|
| | DW-HE Warm Dim Applications | WD |
| 0.1% | QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP |
| 1% | QZ-DALI-DT8 | QTM-eLED(E) QZ-DALI-DT6 |
| 10% | Non-Dim Power Supply with WD App Dongle | Non-Dim Power Supply with SW App Dongle |

| DIMMING PROTOCOL | INDOOR | |
|---|---|---|
| | DW-HE Warm Dim Applications | WD |
| Phase | QZ-DW | QT-CAB-QZ-PH/0-10V QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP |
| 0-10V | QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QTM-eLED+0-10V QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP |
| Lutron Athena | QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN | QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6-AWN |
| ECO System | | QTM-eLED(E) |
| DMX If using DW LED, wattage must be doubled | | QZ-DMX |
| DALI-2: DT6 If using DW LED, wattage must be doubled except for AWN | QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6 | QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6 |
| DALI-2: DT8 If using DW LED, wattage must be doubled except for AWN | QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8 | |
| SCENE App Dimmed | Non-Dim Power Supply with WD App Dongle | Non-Dim Power Supply with SW App Dongle |



VERS-OPTICS (05) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE MOUNTING ACCESSORIES

| | | | | | | | | | |
|---|---|--|---|---|---|---|---|---|---|
| HINGE - HMB-M 1.41" .71" Adjustable mounting bracket - Medium | HINGE - HMB-L 1.46" 1.29" Adjustable mounting bracket - Large | HINGE - HMB-XL 4" 1.46" Adjustable mounting bracket - XLarge | Q-PIVOT .75" 1.03" Small mounting accessory | Q-ANGLE 2.23" 1.38" Adjustable mounting accessory | NJ-LARGE J Mounting Bracket | NU-LARGE U Mounting Bracket | SD-J-LARGE J Mounting Bracket | BL-LARGE Backwards L Mounting Bracket | NL-LARGE L Mounting Bracket |
| SD-L-LARGE L Mounting Bracket | MMA-02 1.86" 12" .64" .58" Magnet Mount Accessory for MG-02 | | | | | | | | |

COMPATIBLE WIRING ACCESSORIES

| | |
|--|--|
| Q-mini-J 2" 1.25" UL Listed, miniature junction box, DRY/DMP (WET rated with silicone) | Q-mini-J5 2.80" 2.27" UL Listed, miniature junction box, DRY/DMP (WET rated with silicone) |
|--|--|

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE

1.36"
2.58"
Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP

Read and write DMX addresses and adjust voltage