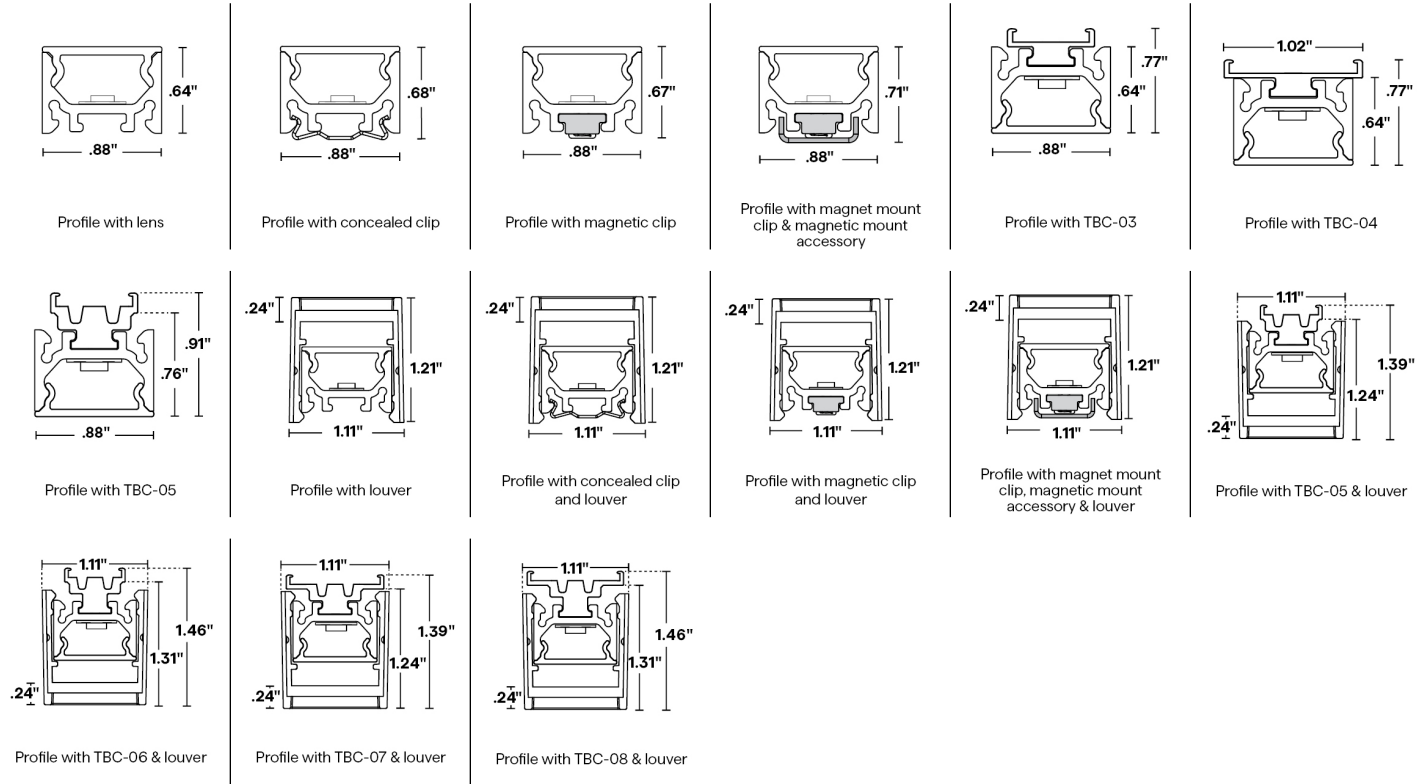




VERS-PROUD (01) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS




2 DELIVERED LUMENS

[Calculated L70 = 50000 hrs]
Tested with VERS-01-SC-5.0-**-DRY


| | Red | | Green | | Blue | | Amber | |
|----|-------|------------|-------|------------|-------|------------|-------|------------|
| | LM/FT | Wavelength | LM/FT | Wavelength | LM/FT | Wavelength | LM/FT | Wavelength |
| FR | 116 | 634 | 554 | 519 | 127 | 467 | 86 | 595 |
| PR | 111 | 634 | 546 | 519 | 123 | 467 | 80 | 596 |
| DF | 105 | 634 | 490 | 519 | 114 | 467 | 73 | 596 |

5 DIODE VISIBILITY



PHOTOMETRIC PERFORMANCE

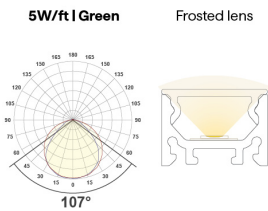Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.





VERS-PROUD (01) STATIC COLOR


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS


| | | 5.0 W/FT | |
|-----|----------------------------------|----------|-------|
| | | Min | Max |
| DRY | Ambient Operating Temp - Surface | -4°F | 125°F |
| DMP | Ambient Operating Temp - Surface | -4°F | 120°F |
| WET | Ambient Operating Temp - Surface | -4°F | 120°F |

6 EXTERNAL LOUVER

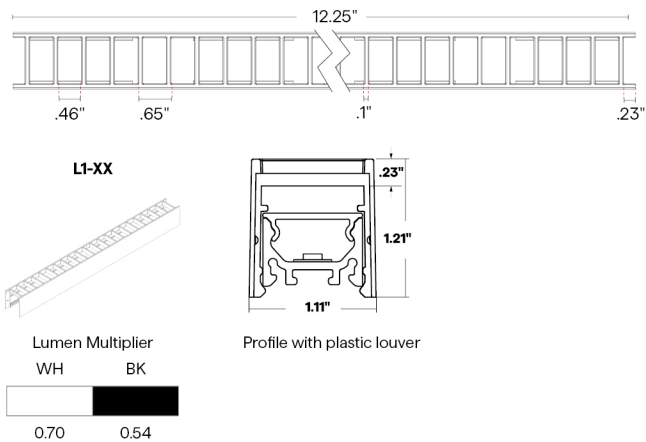PLASTIC




METAL

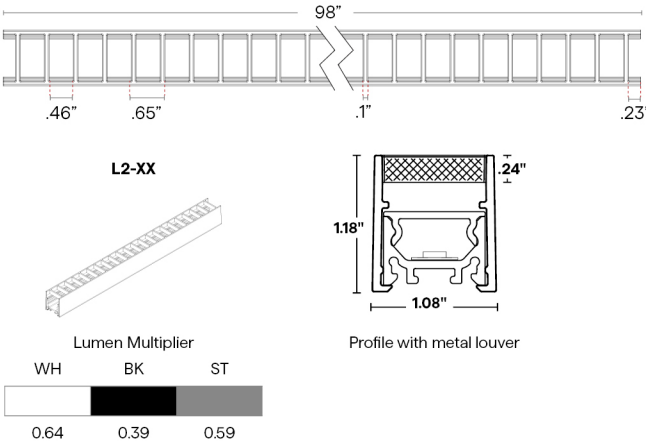


7 WIRE INPUT/OUTPUT

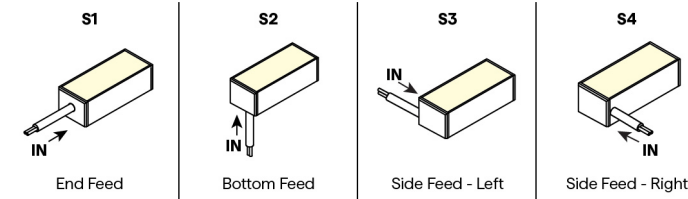SINGLE (Input only)



PASS THROUGH (Input/Output)

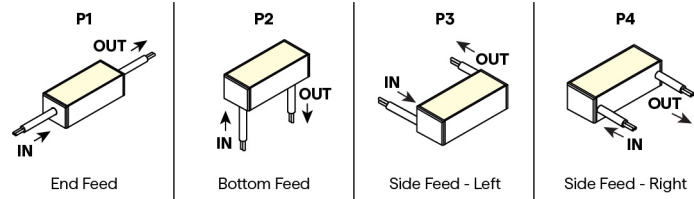



VERS-PROUD (01) STATIC COLOR

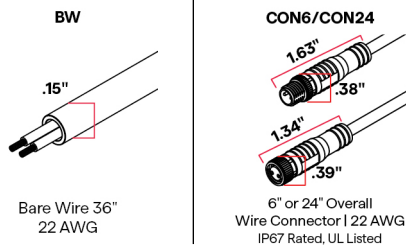
24VDC Linear Fixtures - Surface & Recessed

CONFIGURATION OPTIONS



8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product.



10 WIRE COLOR



12 MOUNTING

| | | | | |
|--|---|--|--|--|
| <p>CC (CC-01)</p> <p>Concealed Clip</p> <p>2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'</p> <p>To order separately use CC-01 (sold in pairs)</p> <p>Each clips comes with a #4 x 5/8" Flat Head screw.</p> | <p>CC (CC-02)</p> <p>Louver Concealed Clip Required if L1 or L2 Louver is selected</p> <p>2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'</p> <p>To order separately use CC-02 (sold in pairs)</p> <p>Each clips comes with a #4 x 5/8" Flat Head screw.</p> | <p>MG</p> <p>Magnet Clip</p> <p>One MG provided per foot</p> <p>To order separately use MG-02</p> | <p>MMA-02</p> <p>Magnet Mount Accessory for MG-02</p> <p>Sold separately, to order use MMA-02</p> <p>Each clip comes with a #6 Flat Screw</p> <p>Required when mounting to a non-magnetic surface</p> | <p>TBC-03</p> <p>Plastic T-Bar Clip</p> <p>Use on 9/16" Flat Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-03</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p> |
|--|---|--|--|--|



VERS-PROUD (01) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

MOUNTING CONTINUED

| | | | | |
|--|---|---|---|--|
| <p>TBC-04</p> <p>Plastic T-Bar Clip</p> <p>Use on 15/16" Flat or Tegular Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-04</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p> | <p>TBC-05</p> <p>Plastic T-Bar Clip</p> <p>Use on 9/16" Tegular Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-05</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p> | <p>TBC-06</p> <p>Plastic T-Bar Clip</p> <p>Use with Louver on 9/16" Tegular Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-06</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p> | <p>TBC-07</p> <p>Plastic T-Bar Clip</p> <p>Use with Louver on 15/16" Flat Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-07</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p> | <p>TBC-08</p> <p>Plastic T-Bar Clip</p> <p>Use with Louver on 15/16" Tegular Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-08</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p> |
|--|---|---|---|--|

13 FINISH

| | |
|--|--------|
| | Satin |
| | Black |
| | Bronze |
| | White |

Custom finishes require a longer lead time, consult factory

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.





VERS-PROUD (01) STATIC COLOR








24VDC Linear Fixtures - Surface & Recessed

SC DRY DMP LENGTHS BY INCH

EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture  |
|------------------|---|
| 12" | 1" |
| 13" | 0.5" |
| 14" | 1" |
| 15" | 0.5" |
| 16" | 1" |
| 17" | 0.5" |
| 18" | 1" |
| 19" | 0.5" |
| 20" | 1" |
| 21" | 0.5" |
| 22" | 1" |
| 23" | 0.5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |

OPTIMAL LENGTH




| Requested Nominal Length | S1 & S2  End Feed | S2  Bottom Feed | P1 & P2  End Feed | P2  Bottom Feed | S3 & S4  Side Feed - Left | S4  Side Feed - Right | P3 & P4  Side Feed - Left | P4  Side Feed - Right |
|--------------------------|--|--|--|---|--|--|--|--|
| 12" | 10.49" | | 10.74" | | 10.34" | | 10.44" | |
| 13" | 12.49" | | 12.74" | | 12.34" | | 12.44" | |
| 14" | 12.49" | | 12.74" | | 12.34" | | 12.44" | |
| 15" | 14.49" | | 14.74" | | 14.34" | | 14.44" | |
| 16" | 14.49" | | 14.74" | | 14.34" | | 14.44" | |
| 17" | 16.49" | | 16.74" | | 16.34" | | 16.44" | |
| 18" | 16.49" | | 16.74" | | 16.34" | | 16.44" | |
| 19" | 18.49" | | 18.74" | | 18.34" | | 18.44" | |
| 20" | 18.49" | | 18.74" | | 18.34" | | 18.44" | |
| 21" | 20.49" | | 20.74" | | 20.34" | | 20.44" | |
| 22" | 20.49" | | 20.74" | | 20.34" | | 20.44" | |
| 23" | 22.49" | | 22.74" | | 22.34" | | 22.44" | |
| 24" | 22.49" | | 22.74" | | 22.34" | | 22.44" | |
| 36" | 34.49" | | 34.74" | | 34.34" | | 34.44" | |
| 48" | 46.49" | | 46.74" | | 46.34" | | 46.44" | |
| 60" | 58.49" | | 58.74" | | 58.34" | | 58.44" | |
| 72" | 70.49" | | 70.74" | | 70.34" | | 70.44" | |
| 84" | 82.49" | | 82.74" | | 82.34" | | 82.44" | |
| 96" | 94.49" | | 94.74" | | 94.34" | | 94.44" | |

SC WET LENGTHS BY INCH

EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture  |
|------------------|---|
| 12" | 1" |
| 13" | 0.5" |
| 14" | 1" |
| 15" | 0.5" |
| 16" | 1" |
| 17" | 0.5" |
| 18" | 1" |
| 19" | 0.5" |
| 20" | 1" |
| 21" | 0.5" |
| 22" | 1" |
| 23" | 0.5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |

OPTIMAL LENGTH

| Requested Nominal Length | S1 & S2  End Feed | S2  Bottom Feed | P1 & P2  End Feed | P2  Bottom Feed | S3 & S4  Side Feed - Left | S4  Side Feed - Right | P3 & P4  Side Feed - Left | P4  Side Feed - Right |
|--------------------------|--|--|--|---|--|--|--|--|
| 12" | 10.69" | | 10.84" | | 10.59" | | 10.69" | |
| 13" | 12.69" | | 12.84" | | 12.59" | | 12.69" | |
| 14" | 12.69" | | 12.84" | | 12.59" | | 12.69" | |
| 15" | 14.69" | | 14.84" | | 14.59" | | 14.69" | |
| 16" | 14.69" | | 14.84" | | 14.59" | | 14.69" | |
| 17" | 16.69" | | 16.84" | | 16.59" | | 16.69" | |
| 18" | 16.69" | | 16.84" | | 16.59" | | 16.69" | |
| 19" | 18.69" | | 18.84" | | 18.59" | | 18.69" | |
| 20" | 18.69" | | 18.84" | | 18.59" | | 18.69" | |
| 21" | 20.69" | | 20.84" | | 20.59" | | 20.69" | |
| 22" | 20.69" | | 20.84" | | 20.59" | | 20.69" | |
| 23" | 22.69" | | 22.84" | | 22.59" | | 22.69" | |
| 24" | 22.69" | | 22.84" | | 22.59" | | 22.69" | |
| 36" | 34.69" | | 34.84" | | 34.59" | | 34.69" | |
| 48" | 46.69" | | 46.84" | | 46.59" | | 46.69" | |
| 60" | 58.69" | | 58.84" | | 58.59" | | 58.69" | |
| 72" | 70.69" | | 70.84" | | 70.59" | | 70.69" | |
| 84" | 82.69" | | 82.84" | | 82.59" | | 82.69" | |
| 96" | 94.69" | | 94.84" | | 94.59" | | 94.69" | |



VERS-PROUD (01) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIM TO LEVEL | INDOOR | OUTDOOR |
|--------------|--|---|
| | SC | SC |
| Dim to Black | Q6M-DC+CAP QTM-DC+CAP IQ-PH+QD1 | QOM-DC+CAP QOM-PH |
| 0.1% | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP | Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V |
| 1% | QTM-eLED(E) QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6 QZ-DALI-DT6 |
| 10% | Non-Dim Power Supply with SW App Dongle | |















VERS-PROUD (01) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

| DIMMING PROTOCOL | INDOOR | OUTDOOR |
|------------------|--|--|
| | SC | SC |
| Non-Dim | QT-CAB-eLED-ND QTM-eLED-ND QZ-ND | Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND |
| Phase | Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1 | Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V |
| 0-10V | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP | Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V |
| Lutron Athena | QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN | |
| ECO System | QTM-eLED(E) | |
| DMX | QZ-DMX | Q-SET-QZ-DMX QZ-DMX |
| DALI-2: DT6 | QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6 |
| SCENE App Dimmed | Non-Dim Power Supply with SW App Dongle | |

COMPATIBLE MOUNTING ACCESSORIES

| | | | | | | | | | |
|--|--|---|--|--|--|---|--|--|--|
| HINGE - HMB-M  1.41" .71" Adjustable mounting bracket - Medium | HINGE - HMB-L  1.46" 1.29" Adjustable mounting bracket - Large | HINGE - HMB-XL  4" 1.46" Adjustable mounting bracket - XLarge | Q-PIVOT  .75" 1.03" Small mounting accessory | Q-ANGLE  2.23" 1.38" Adjustable mounting accessory | NJ-LARGE  J Mounting Bracket | NU-LARGE  U Mounting Bracket | SD-J-LARGE  J Mounting Bracket | BL-LARGE  Backwards L Mounting Bracket | NL-LARGE  L Mounting Bracket |
| SD-L-LARGE  L Mounting Bracket | MMA-02  1.86" .64" .58" 12" Magnet Mount Accessory for MG-02 | | | | | | | | |



VERS-PROUD (01) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE WIRING ACCESSORIES

| | | | | |
|--|---|---|---|--|
| <p>Q-mini-J</p>  <p>UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)</p> | <p>Q-mini-J5</p>  <p>UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)</p> | <p>CON120-EXT</p>  <p>10ft Con cable extender DRY/DMP/WET</p> | <p>CON FOUR-FER</p>  <p>Splits lead from one to four LED Con connectors DRY/DMP/WET</p> | <p>CON M - BARREL F</p>  <p>Male con to barrel cable adaptor DRY/DMP</p> |
|--|---|---|---|--|

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage