
# VERS-PROUD (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

WHITE OPTICS | cULus LISTED | NEC 410.2 & 410.16 Closet Rated up to 4.0W/ft | RoHS COMPLIANT | EPD ENVIRONMENTAL PRODUCT DECLARATION | JA8 2016 | 1-BIN 1-STEP STANDARD AND HE | 5 YEAR WARRANTY | BAA BUY AMERICAN ACT COMPLIANT | BABA BUILD AMERICA, BUY AMERICA COMPLIANT | Red List Approved Declare.






- Utilizes an extruded lens that sits proud of the fixture for maximum variations of LED sources
- The high-quality lens provides a delicate glow at the edges of the fixture, creating a slim line of light
- Integrated metal endcaps combined with an extruded aluminum housing give this fixture a polished modern look
- White Optics, an internal coating that results in greater lumen output, comes standard in all VERS fixtures.
- Consult factory for field assembly options
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Optional external louver accessory available in white or black for added glare control

**INFORMATION REQUIRED FOR LIGHTING SCHEDULE**

| 1 PRODUCT | 2 WATTS/ FT | 3 CCT | 4 RATED | 5 LENS | 6 EXTERNAL LOUVER |
|---|---|---|---|---|---|
| | | | | | |

**ADDITIONAL INFORMATION REQUIRED TO ORDER**

| 7 WIRE INPUT/ OUTPUT | 8 CONNECTOR/ WIRE IN | 9 CONNECTOR/ WIRE OUT | 10 WIRE COLOR | 11 WIRE TYPE | 12 MOUNTING | 13 FINISH | 14 LENGTH (IN) | 15 EXACT/ OPTIMAL |
|---|---|---|---|---|---|---|---|---|
| | | | | | | | | |

Sample Part Number: **VERS-01-SW-5.0-30-DRY-DF-L1-BK-P1-BW-BW-BK-CL2-CC-BK-48"-E**

## 1 PRODUCT

**VERS-01-SW**
**VERS-01-SW-USA**

Select USA option for BAA and BABA projects. Only DRY or WET ratings apply.

See following pages for compatible power supplies.

## 2 WATTS/FT

| | |
|---|---|
| **1.5** | 1.5W/ft |
| **3.0** | 3.0W/ft |
| **4.0** | 4.0W/ft |
| **5.0** | 5.0W/ft |
| **1.5HE** | 1.5W/ft HE |
| **3.0HE** | 3.0W/ft HE |
| **6.0HE** | 6.0W/ft HE |
| **9.0HE** | 9.0W/ft HE |

| | |
|---|---|
| **1.5** | 1.5W/ft |
| **3.0** | 3.0W/ft |
| **4.0** | 4.0W/ft |
| **5.0** | 5.0W/ft |
| **1.5HE** | 1.5W/ft HE |
| **3.0HE** | 3.0W/ft HE |
| **6.0HE** | 6.0W/ft HE |

| | |
|---|---|
| **1.5** | 1.5W/ft |
| **3.0** | 3.0W/ft |
| **4.0** | 4.0W/ft |
| **5.0** | 5.0W/ft |

## 3 CCT

| | |
|---|---|
| **18** | 1800K |
| **20** | 2000K |
| **22** | 2200K |
| **24** | 2400K |
| **27** | 2700K |
| **30** | 3000K |
| **35** | 3500K |
| **40** | 4000K |

| | |
|---|---|
| **18** | 1800K |
| **20** | 2000K |
| **22** | 2200K |
| **24** | 2400K |
| **27** | 2700K |
| **30** | 3000K |
| **35** | 3500K |
| **40** | 4000K |

| | |
|---|---|
| **18** | 1800K |
| **20** | 2000K |
| **22** | 2200K |
| **24** | 2400K |
| **27** | 2700K |
| **30** | 3000K |
| **35** | 3500K |
| **40** | 4000K |

## 4 RATED

**DRY** IP20

**DMP** IP54

**WET** IP67

Can be suitable for exterior use, contact factory for more information

## 5 LENS

| | |
|---|---|
| **DF** | Diffused |
| **PR** | Polar |
| **FR** | Frosted |

For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. See VERS-04 for additional 25° lens option.

## 6 EXTERNAL LOUVER

| | |
|---|---|
| **L1-WH** | White Plastic |
| **L1-BK** | Black Plastic |
| **L2-ST** | Satin Anodized Aluminum |
| **L2-BK** | Black Anodized Aluminum |
| **L2-WH** | White Powder Coated Aluminum |
| **N/A** | No Louver |

Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. Aluminum louvers come in maximum 98" lengths and will be cut to match fixture length. White and custom painted finishes are not compatible with L2 external louvers.

## 7 WIRE INPUT/OUTPUT

**SINGLE (Input only)**

| | |
|---|---|
| **S1** | End Feed |
| **S2** | Bottom Feed |
| **S3** | Left Side Feed |
| **S4** | Right Side Feed |

**PASS THROUGH (Input/output)**

| | |
|---|---|
| **P1** | End Feed |
| **P2** | Bottom Feed |
| **P3** | Left Side Feed |
| **P4** | Right Side Feed |

When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.

## 8 CONNECTOR/WIRE IN

| | |
|---|---|
| **BW** | Bare Wire (Standard 36") |
| **CON6** | Connector 6" |
| **CON24** | Connector 24" |

| | |
|---|---|
| **BW** | Bare Wire (Standard 36") |
| **CON6** | Connector 6" |
| **CON24** | Connector 24" |

BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

## 9 CONNECTOR/WIRE OUT

**CLS** Closed End (No feed)

| | |
|---|---|
| **BW** | Bare Wire (Standard 36") |
| **CON6** | Connector 6" |
| **CON24** | Connector 24" |

BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

## 10 WIRE COLOR

| | |
|---|---|
| **WH** | White |
| **BK** | Black |

## 11 WIRE TYPE

| | |
|---|---|
| **CL2** | Class 2 |
| **CL2P** | Plenum Rated |

CL2P only available with bare wire leads (BW)

## 12 MOUNTING

| | |
|---|---|
| **CC** | Concealed Clip |
| **MG** | Magnet |
| **TBC-03** | 9/16" Flat TB-Grid |
| **TBC-04** | 15/16" Flat or Tegular TB-Grid |
| **TBC-05** | 9/16" Tegular TB-Grid or 9/16" Flat TB-Grid, with External Louver |
| **TBC-06** | 9/16" Tegular TB-Grid, with External Louver |
| **TBC-07** | 15/16" Flat TB-Grid, with External Louver |
| **TBC-08** | 15/16" Tegular TB-Grid, with External Louver |

## 13 FINISH

| | |
|---|---|
| **ST** | Satin |
| **BK** | Black |
| **BZ** | Bronze |
| **WH** | White |
| **CU** | Custom |

White and custom finishes are incompatible with external louvers; custom finishes have longer lead times. Non-RAL 9003 whites are custom.

## 14 LENGTH (IN)

Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".

## 15 EXACT/OPTIMAL

| | |
|---|---|
| **O** | Optimal Illumination |
| **E** | Exact Specified Length |

Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting


Specification subject to change. Rev-08-28-26

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance | Suitable for installation in the storage area of a clothes closet when using wattage of 4.0W/ft or less


# VERS-PROUD (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed


## 1 PRODUCT - DIMENSIONS




Profile with lens




Profile with concealed clip




Profile with magnetic clip




Profile with magnet mount clip & magnetic mount accessory




Profile with TBC-03




Profile with TBC-04




Profile with TBC-05




Profile with louver




Profile with concealed clip and louver




Profile with magnetic clip and louver




Profile with magnet mount clip, magnetic mount accessory & louver




Profile with TBC-05 & louver



Profile with TBC-06 & louver



Profile with TBC-07 & louver




Profile with TBC-08 & louver

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 66000 hrs for HE]
Tested with VERS-01-SW-**-30-DRY

| | 1.5 W/FT | | 1.5HE W/FT | | 3.0 W/FT | | 3.0HE W/FT | | 4.0 W/FT | | 5.0 W/FT | | 6.0HE W/FT | | 9.0HE W/FT | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI |
| FR | 156 | 98 | 197 | 98 | 270 | 98 | 374 | 98 | 348 | 98 | 423 | 98 | 681 | 98 | 995 | 98 |
| PR | 152 | 98 | 190 | 98 | 261 | 98 | 360 | 98 | 338 | 98 | 409 | 98 | 669 | 98 | 968 | 98 |
| DF | 138 | 97 | 172 | 98 | 240 | 98 | 326 | 98 | 310 | 98 | 370 | 98 | 616 | 98 | 874 | 98 |

## 5 DIODE VISIBILITY

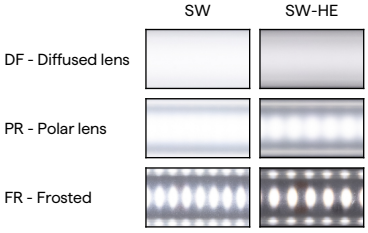


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


# VERS-PROUD (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

**5W/ft** Frosted lens





## TEMPERATURE RATINGS


| | | 1.5 W/FT | | 1.5 HE W/FT | | 3.0 W/FT | | 3.0 HE W/FT | | 4.0 W/FT | | 5.0 W/FT | | 6.0 HE W/FT | | 9.0 HE W/FT | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| DRY | Ambient Operating Temp - Surface | -4°F | 140°F | -4°F | 145°F | -4°F | 130°F | -4°F | 135°F | -4°F | 125°F | -4°F | 120°F | -4°F | 120°F | -4°F | 100°F |
| DMP | Ambient Operating Temp - Surface | -4°F | 140°F | -4°F | 145°F | -4°F | 130°F | -4°F | 135°F | -4°F | 125°F | -4°F | 120°F | -4°F | 120°F | — | — |
| WET | Ambient Operating Temp - Surface | -4°F | 135°F | — | — | -4°F | 125°F | — | — | -4°F | 120°F | -4°F | 115°F | — | — | — | — |

## 6 EXTERNAL LOUVER

**PLASTIC**

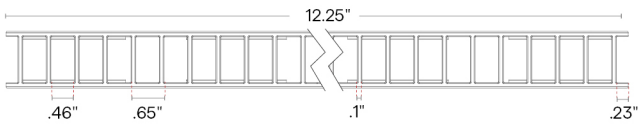



**L1-XX**




Lumen Multiplier

| WH | BK |
|---|---|
| 0.70 | 0.54 |





Profile with plastic louver

**METAL**

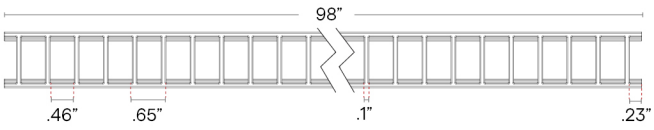



**L2-XX**



Lumen Multiplier

| WH | BK | ST |
|---|---|---|
| 0.64 | 0.39 | 0.59 |




Profile with metal louver


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

# VERS-PROUD (01) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

## 7 WIRE INPUT/OUTPUT


SINGLE (Input only)





End Feed




Bottom Feed





Side Feed - Left





Side Feed - Right


PASS THROUGH (Input/Output)





End Feed




Bottom Feed





Side Feed - Left





Side Feed - Right

## CONFIGURATION OPTIONS





Single End Feed





Connection by others

Non-Continuous End Feed





Connection by others


Non-Continuous Corner Feed





Continuous Bottom Feed




Continuous Side Feed - Left





Continuous Side Feed - Right

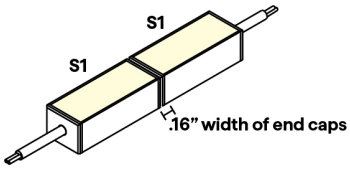



Continuous End to End Feed

## 8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product.





Bare Wire 36"
22 AWG




6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

## 10 WIRE COLOR



White

Black

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-08-28-26

# VERS-PROUD (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

## 12 MOUNTING

**CC**
(CC-01)





Concealed Clip

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'

To order separately use CC-01 (sold in pairs)

Each clips comes with a #4 x 5/8" Flat Head screw.

**CC**
(CC-02)




Louver Concealed Clip
Required if L1 or L2 Louver is selected

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'

To order separately use CC-02 (sold in pairs)

Each clips comes with a #4 x 5/8" Flat Head screw.

**MG**





Magnet Clip

One MG provided per foot

To order separately use MG-02

**MMA-02**





Magnet Mount
Accessory for MG-02

Sold separately, to order use MMA-02

Each clip comes with a #6 Flat Screw

Required when mounting to a non-magnetic surface

**TBC-03**




Plastic T-Bar Clip

Use on 9/16" Flat Drop Ceiling


2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-03

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

## MOUNTING CONTINUED

**TBC-04**




Plastic T-Bar Clip


Use on 15/16" Flat or Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-04

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

**TBC-05**




Plastic T-Bar Clip


Use on 9/16" Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-05

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

**TBC-06**




Plastic T-Bar Clip


Use with Louver on 9/16" Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-06

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

**TBC-07**




Plastic T-Bar Clip


Use with Louver on 15/16" Flat Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-07

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

**TBC-08**




Plastic T-Bar Clip

Use with Louver on 15/16" Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-08

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

## 13 FINISH

- Satin
- Black
- Bronze
- White

White and custom finishes are incompatible with external louvers; custom finishes have longer lead times. Non-RAL 9003 whites are custom.


© 2026 QTL. All rights reserved 

# VERS-PROUD (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed


## 15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.




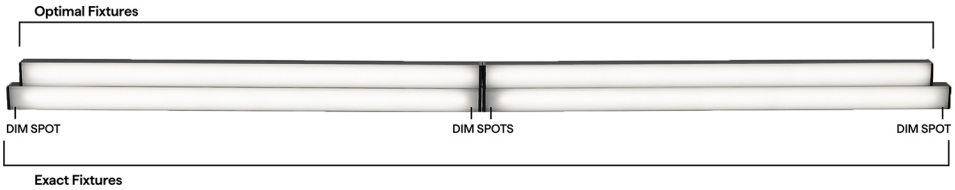



## SW DRY DMP LENGTHS BY INCH

### EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture   |
|---|---|
| 12" | 0.5" |
| 13" | 0.5" |
| 14" | 0.5" |
| 15" | 0.5" |
| 16" | 0.5" |
| 17" | 0.5" |
| 18" | 0.5" |
| 19" | 0.5" |
| 20" | 0.5" |
| 21" | 0.5" |
| 22" | 0.5" |
| 23" | 0.5" |
| 24" | 0.5" |
| 36" | 0.5" |
| 48" | 0.5" |
| 60" | 0.5" |
| 72" | 0.5" |
| 84" | 0.5" |
| 96" | 0.5" |

### OPTIMAL LENGTH

| Requested Nominal Length | S1 & S2   | P1 & P2   | S3 & S4   | P3 & P4   |
|---|---|---|---|---|
| 12" | 11.49" | 11.74" | 11.34" | 11.44" |
| 13" | 12.49" | 12.74" | 12.34" | 12.44" |
| 14" | 13.49" | 13.74" | 13.34" | 13.44" |
| 15" | 14.49" | 14.74" | 14.34" | 14.44" |
| 16" | 15.49" | 15.74" | 15.34" | 15.44" |
| 17" | 16.49" | 16.74" | 16.34" | 16.44" |
| 18" | 17.49" | 17.74" | 17.34" | 17.44" |
| 19" | 18.49" | 18.74" | 18.34" | 18.44" |
| 20" | 19.49" | 19.74" | 19.34" | 19.44" |
| 21" | 20.49" | 20.74" | 20.34" | 20.44" |
| 22" | 21.49" | 21.74" | 21.34" | 21.44" |
| 23" | 22.49" | 22.74" | 22.34" | 22.44" |
| 24" | 23.49" | 23.74" | 23.34" | 23.44" |
| 36" | 35.49" | 35.74" | 35.34" | 35.44" |
| 48" | 47.49" | 47.74" | 47.34" | 47.44" |
| 60" | 59.49" | 59.74" | 59.34" | 59.44" |
| 72" | 71.49" | 71.74" | 71.34" | 71.44" |
| 84" | 83.49" | 83.74" | 83.34" | 83.44" |
| 96" | 95.49" | 95.74" | 95.34" | 95.44" |


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# VERS-PROUD (01) STATIC WHITE





24VDC Linear Fixtures - Surface & Recessed

## SW WET LENGTHS BY INCH

### EXACT LENGTH


| Requested Length | Potential dim spot on either end of a S1 fixture |
|---|---|
| |   End Feed |
| 12" | 0.5" |
| 13" | 0.5" |
| 14" | 0.5" |
| 15" | 0.5" |
| 16" | 0.5" |
| 17" | 0.5" |
| 18" | 0.5" |
| 19" | 0.5" |
| 20" | 0.5" |
| 21" | 0.5" |
| 22" | 0.5" |
| 23" | 0.5" |
| 24" | 0.5" |
| 36" | 0.5" |
| 48" | 0.5" |
| 60" | 0.5" |
| 72" | 0.5" |
| 84" | 0.5" |
| 96" | 0.5" |

### OPTIMAL LENGTH





| Requested Nominal Length | S1 & S2 | | P1 & P2 | | S3 & S4 | | P3 & P4 | |
|---|---|---|---|---|---|---|---|---|
| |   End Feed | Bottom Feed |   End Feed | Bottom Feed |   Side Feed - Left | Side Feed - Right |   Side Feed - Left | Side Feed - Right |
| 12" | 11.64" | | 11.79" | | 11.54" | | 11.64" | |
| 13" | 12.64" | | 12.79" | | 12.54" | | 12.64" | |
| 14" | 13.64" | | 13.79" | | 13.54" | | 13.64" | |
| 15" | 14.64" | | 14.79" | | 14.54" | | 14.64" | |
| 16" | 15.64" | | 15.79" | | 15.54" | | 15.64" | |
| 17" | 16.64" | | 16.79" | | 16.54" | | 16.64" | |
| 18" | 17.64" | | 17.79" | | 17.54" | | 17.64" | |
| 19" | 18.64" | | 18.79" | | 18.54" | | 18.64" | |
| 20" | 19.64" | | 19.79" | | 19.54" | | 19.64" | |
| 21" | 20.64" | | 20.79" | | 20.54" | | 20.64" | |
| 22" | 21.64" | | 21.79" | | 21.54" | | 21.64" | |
| 23" | 22.64" | | 22.79" | | 22.54" | | 22.64" | |
| 24" | 23.64" | | 23.79" | | 23.54" | | 23.64" | |
| 36" | 35.64" | | 35.79" | | 35.54" | | 35.64" | |
| 48" | 47.64" | | 47.79" | | 47.54" | | 47.64" | |
| 60" | 59.64" | | 59.79" | | 59.54" | | 59.64" | |
| 72" | 71.64" | | 71.79" | | 71.54" | | 71.64" | |
| 84" | 83.64" | | 83.79" | | 83.54" | | 83.64" | |
| 96" | 95.64" | | 95.79" | | 95.54" | | 95.64" | |

## SW-HE DRY DMP LENGTHS BY INCH

### EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture |
|---|---|
| |   End Feed |
| 12" | 1" |
| 13" | 0.5" |
| 14" | 1" |
| 15" | 0.5" |
| 16" | 1" |
| 17" | 0.5" |
| 18" | 1" |
| 19" | 0.5" |
| 20" | 1" |
| 21" | 0.5" |
| 22" | 1" |
| 23" | 0.5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |

### OPTIMAL LENGTH

| Requested Nominal Length | S1 & S2 | | P1 & P2 | | S3 & S4 | | P3 & P4 | |
|---|---|---|---|---|---|---|---|---|
| |   End Feed | Bottom Feed |   End Feed | Bottom Feed |   Side Feed - Left | Side Feed - Right |   Side Feed - Left | Side Feed - Right |
| 12" | 10.49" | | 10.74" | | 10.34" | | 10.44" | |
| 13" | 12.49" | | 12.74" | | 12.34" | | 12.44" | |
| 14" | 12.49" | | 12.74" | | 12.34" | | 12.44" | |
| 15" | 14.49" | | 14.74" | | 14.34" | | 14.44" | |
| 16" | 14.49" | | 14.74" | | 14.34" | | 14.44" | |
| 17" | 16.49" | | 16.74" | | 16.34" | | 16.44" | |
| 18" | 16.49" | | 16.74" | | 16.34" | | 16.44" | |
| 19" | 18.49" | | 18.74" | | 18.34" | | 18.44" | |
| 20" | 18.49" | | 18.74" | | 18.34" | | 18.44" | |
| 21" | 20.49" | | 20.74" | | 20.34" | | 20.44" | |
| 22" | 20.49" | | 20.74" | | 20.34" | | 20.44" | |
| 23" | 22.49" | | 22.74" | | 22.34" | | 22.44" | |
| 24" | 22.49" | | 22.74" | | 22.34" | | 22.44" | |
| 36" | 34.49" | | 34.74" | | 34.34" | | 34.44" | |
| 48" | 46.49" | | 46.74" | | 46.34" | | 46.44" | |
| 60" | 58.49" | | 58.74" | | 58.34" | | 58.44" | |
| 72" | 70.49" | | 70.74" | | 70.34" | | 70.44" | |
| 84" | 82.49" | | 82.74" | | 82.34" | | 82.44" | |
| 96" | 94.49" | | 94.74" | | 94.34" | | 94.44" | |

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# VERS-PROUD (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIM TO LEVEL | INDOOR | | OUTDOOR | |
|---|---|---|---|---|
| | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ |
| Dim to Black | Q6M-DC+CAP<br>QTM-DC+CAP<br>iQ-PH+QD1 | Q6M-DC+CAP<br>QTM-DC+CAP<br>iQ-PH+QD1 | QOM-DC+CAP<br>QOM-PH | QOM-DC+CAP<br>QOM-PH |
| 0.1% | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-BOWTIE+DIMMER<br>QZ-DMX<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-BOWTIE+DIMMER<br>QZ-DMX<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | Q-SET-QZ-DMX<br>Q-SET-QZ-PH/0-10V<br>Q-SET-eLED+0-10V<br>QOM-eLED+0-10V<br>QOM-eLED+DALI-DT6<br>QOM-eLED+DALI-DT6-PS<br>QZ-DMX<br>QZ-PRO-PH/0-10V | Q-SET-QZ-DMX<br>Q-SET-QZ-PH/0-10V<br>Q-SET-eLED+0-10V<br>QOM-eLED+0-10V<br>QOM-eLED+DALI-DT6<br>QOM-eLED+DALI-DT6-PS<br>QZ-DMX<br>QZ-PRO-PH/0-10V |
| 1% | Q-DIM<br>QTM-eLED(E)<br>QZ-DALI-DT6 | Q-DIM<br>QTM-eLED(E)<br>QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6<br>QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6<br>QZ-DALI-DT6 |
| 10% | Non-Dim Power Supply with SW App Dongle | Non-Dim Power Supply with SW App Dongle | Q-HEX-mini-DC<br>Q-SET-mLED | |

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


# VERS-PROUD (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

| DIMMING PROTOCOL | INDOOR | | OUTDOOR | |
|---|---|---|---|---|
| | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ |
| **Non-Dim** | QT-CAB-eLED-ND<br>QTM-eLED-ND<br>QZ-ND | QT-CAB-eLED-ND<br>QTM-eLED-ND<br>QZ-ND | Q-SET-QZ-ND<br>Q-SET-eLED-ND<br>QOM-eLED-ND<br>QZ-ND | Q-SET-QZ-ND<br>Q-SET-eLED-ND<br>QOM-eLED-ND<br>QZ-ND |
| **Phase** | Q6M-DC+CAP<br>QT-CAB-QZ-PH/0-10V<br>QTM-DC+CAP<br>QTM-eLED(E)<br>QZ-BOWTIE+DIMMER<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP<br>iQ-PH+QD1 | Q6M-DC+CAP<br>QT-CAB-QZ-PH/0-10V<br>QTM-DC+CAP<br>QTM-eLED(E)<br>QZ-BOWTIE+DIMMER<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP<br>iQ-PH+QD1 | Q-HEX-mini-DC<br>Q-SET-QZ-PH/0-10V<br>Q-SET-mLED<br>QOM-DC+CAP<br>QOM-PH<br>QZ-PRO-PH/0-10V | Q-SET-QZ-PH/0-10V<br>QOM-DC+CAP<br>QOM-PH<br>QZ-PRO-PH/0-10V |
| **0-10V** | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | Q-SET-QZ-PH/0-10V<br>Q-SET-eLED+0-10V<br>QOM-eLED+0-10V<br>QZ-PRO-PH/0-10V | Q-SET-QZ-PH/0-10V<br>Q-SET-eLED+0-10V<br>QOM-eLED+0-10V<br>QZ-PRO-PH/0-10V |
| **Lutron Athena** | QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6-AWN | QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6-AWN | | |
| **ECO System** | QTM-eLED(E) | QTM-eLED(E) | | |
| **DMX** | QZ-DMX | QZ-DMX | Q-SET-QZ-DMX<br>QZ-DMX | Q-SET-QZ-DMX<br>QZ-DMX |
| **DALI-2: DT6** | QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-DALI-DT6 | QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6<br>QOM-eLED+DALI-DT6<br>QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6<br>QOM-eLED+DALI-DT6<br>QZ-DALI-DT6 |
| **SCENE App Dimmed** | Non-Dim Power Supply with SW App Dongle | Non-Dim Power Supply with SW App Dongle | | |


## COMPATIBLE MOUNTING ACCESSORIES

**HINGE - HMB-M**




Adjustable mounting bracket - Medium

**HINGE - HMB-L**




Adjustable mounting bracket - Large

**HINGE - HMB-XL**




Adjustable mounting bracket - XLarge

**Q-PIVOT**




Small mounting accessory

**Q-ANGLE**




Adjustable mounting accessory

**NJ-LARGE**



J Mounting Bracket

**NU-LARGE**




U Mounting Bracket

**SD-J-LARGE**



J Mounting Bracket

**BL-LARGE**



Backwards L Mounting Bracket

**NL-LARGE**




L Mounting Bracket

**SD-L-LARGE**



L Mounting Bracket

**MMA-02**




Magnet Mount Accessory for MG-02

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-08-28-26

# VERS-PROUD (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed


## COMPATIBLE WIRING ACCESSORIES

**Q-mini-J**




UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

**Q-mini-J5**




UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

**CON120-EXT**



10ft Con cable extender
DRY/DMP/WET

**CON FOUR-FER**



Splits lead from one to four LED Con connectors
DRY/DMP/WET

**CON M - BARREL F**



Male con to barrel cable adaptor
DRY/DMP

## COMPATIBLE CONTROL ACCESSORIES

**SCENE APP DONGLE**




Wi-Fi or Bluetooth Connectivity

## COMPATIBLE APPS

**NFC APP**




Read and write DMX addresses and adjust voltage

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting