





ESSENTIALS EMBD-OPTICS (02) WD APPLICATIONS

24VDC Linear Fixtures - Recessed


1 PRODUCT - DIMENSIONS




Profile with optical lens



Profile with optical lens and magnet mounting clip



Profile with optical lens and spring mounting clip



Spring mounting clip

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with EB2WD-6.0-30-DRY-STD

| | 3000K | |
|----|-------|-----|
| | LM/FT | CRI |
| 12 | 348 | 97 |
| 14 | 410 | 97 |
| 20 | 436 | 97 |
| 30 | 467 | 97 |
| 45 | 477 | 97 |
| 60 | 495 | 97 |

[Calculated L70 = 70000 hrs]
Tested with EB2DW-**-30-DRY-STD

| | 1.5HE W/FT | | 2.5HE W/FT | |
|----|------------|-----|------------|-----|
| | 3000K | | 3000K | |
| | LM/FT | CRI | LM/FT | CRI |
| 12 | 125 | 98 | 197 | 98 |
| 14 | 140 | 98 | 221 | 98 |
| 20 | 146 | 98 | 231 | 98 |
| 30 | 151 | 98 | 239 | 98 |
| 45 | 166 | 98 | 262 | 98 |
| 60 | 165 | 98 | 261 | 98 |

6 DIODE VISIBILITY




Optical lens

PHOTOMETRIC PERFORMANCE


Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.




Optical 12°




Optical 14°




Optical 20°



Optical 30°
DRY and DMP
LEDs only



Optical 45°
DRY and DMP
LEDs only



Optical 60°
DRY and DMP
LEDs only

TEMPERATURE RATINGS

| | | WD 6.0 W/FT | | DW 1.5 HE W/FT | | DW 3.0 HE W/FT | | DW 2.5 HE W/FT | | DW 5.0 HE W/FT | |
|-----|-----------------------------------|---------------------------------------|-------|------------------------------------|-------|---------------------------------------|-------|------------------------------------|-------|---------------------------------------|-------|
| | | QTL power supply other than DALI, DMX | | DALI, DMX, or non-QTL power supply | | QTL power supply other than DALI, DMX | | DALI, DMX, or non-QTL power supply | | QTL power supply other than DALI, DMX | |
| | | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| DRY | Ambient Operating Temp - Recessed | -4°F | 110°F | -4°F | 140°F | -4°F | 125°F | -4°F | 130°F | -4°F | 110°F |
| DMP | Ambient Operating Temp - Recessed | ** | ** | -4°F | 135°F | -4°F | 120°F | -4°F | 125°F | -4°F | 105°F |
| WET | Ambient Operating Temp - Recessed | -4°F | 105°F | -4°F | 135°F | -4°F | 120°F | -4°F | 125°F | -4°F | 105°F |




ESSENTIALS EMBD-OPTICS (02) WD APPLICATIONS


24VDC Linear Fixtures - Recessed

7 WIRE INPUT/OUTPUT






SINGLE (Input only)



PASS THROUGH (Input/Output)








CONFIGURATION OPTIONS




8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out



10 WIRE COLOR






ESSENTIALS EMBD-OPTICS (02) WD APPLICATIONS

24VDC Linear Fixtures - Recessed

12 MOUNTING

SP




Spring Clip

2 clips provided for 4' or less. 4 clips provided for greater than 4'.

To order separately use SP-01


MG



Magnet Clip

One MG provided per foot
To order separately use MG-02

MMA-02




Magnet Mount
Accessory for MG-02

Sold separately, to order use MMA-02

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface

13 FINISH



Satin

Custom finishes require a longer lead time, consult factory


Custom finishes require a longer lead time, consult factory

14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.




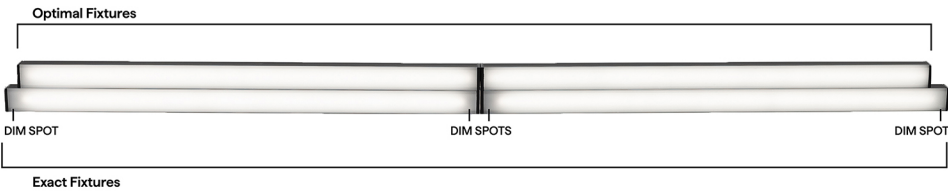


WD DRY LENGTHS BY INCH

EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture  End Feed |
|------------------|---|
| 12" | 1" |
| 13" | 0.5" |
| 14" | 1" |
| 15" | 0.5" |
| 16" | 1" |
| 17" | 0.5" |
| 18" | 1" |
| 19" | 0.5" |
| 20" | 1" |
| 21" | 0.5" |
| 22" | 1" |
| 23" | 0.5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |

OPTIMAL LENGTH

| Requested Nominal Length | S1 & S2 | | P1 & P2 | |
|--------------------------|---|--|---|---|
| |  End Feed |  Bottom Feed |  End Feed |  Bottom Feed |
| 12" | 10.41" | | 10.66" | |
| 13" | 12.41" | | 12.66" | |
| 14" | 12.41" | | 12.66" | |
| 15" | 14.41" | | 14.66" | |
| 16" | 14.41" | | 14.66" | |
| 17" | 16.41" | | 16.66" | |
| 18" | 16.41" | | 16.66" | |
| 19" | 18.41" | | 18.66" | |
| 20" | 18.41" | | 18.66" | |
| 21" | 20.41" | | 20.66" | |
| 22" | 20.41" | | 20.66" | |
| 23" | 22.41" | | 22.66" | |
| 24" | 22.41" | | 22.66" | |
| 36" | 34.41" | | 34.66" | |
| 48" | 46.41" | | 46.66" | |
| 60" | 58.41" | | 58.66" | |
| 72" | 70.41" | | 70.66" | |
| 84" | 82.41" | | 82.66" | |
| 96" | 94.41" | | 94.66" | |



ESSENTIALS EMBD-OPTICS (02) WD APPLICATIONS





24VDC Linear Fixtures - Recessed

WD WET LENGTHS BY INCH

EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture  |
|------------------|---|
| 12" | 1" |
| 13" | 0.5" |
| 14" | 1" |
| 15" | 0.5" |
| 16" | 1" |
| 17" | 0.5" |
| 18" | 1" |
| 19" | 0.5" |
| 20" | 1" |
| 21" | 0.5" |
| 22" | 1" |
| 23" | 0.5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |

OPTIMAL LENGTH

| Requested Nominal Length | S1 & S2 | | P1 & P2 | |
|--------------------------|--|---|--|--|
| |  S1 End Feed |  S2 Bottom Feed |  P1 End Feed |  P2 Bottom Feed |
| 12" | 10.61" | | 10.76" | |
| 13" | 12.61" | | 12.76" | |
| 14" | 12.61" | | 12.76" | |
| 15" | 14.61" | | 14.76" | |
| 16" | 14.61" | | 14.76" | |
| 17" | 16.61" | | 16.76" | |
| 18" | 16.61" | | 16.76" | |
| 19" | 18.61" | | 18.76" | |
| 20" | 18.61" | | 18.76" | |
| 21" | 20.61" | | 20.76" | |
| 22" | 20.61" | | 20.76" | |
| 23" | 22.61" | | 22.76" | |
| 24" | 22.61" | | 22.76" | |
| 36" | 34.61" | | 34.76" | |
| 48" | 46.61" | | 46.76" | |
| 60" | 58.61" | | 58.76" | |
| 72" | 70.61" | | 70.76" | |
| 84" | 82.61" | | 82.76" | |
| 96" | 94.61" | | 94.76" | |

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIM TO LEVEL | INDOOR | | OUTDOOR | |
|--------------|--|---|---|---|
| | DW-HE Warm Dim Applications | WD | DW-HE Warm Dim Applications | WD |
| 0.1% | QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP | Q-SET-QZ-DW QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+WD QZ-DW | Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V |
| 1% | QZ-DALI-DT8 | QTM-eLED(E) QZ-DALI-DT6 | Q-SET+QZ-DALI-DT8 QZ-DALI-DT8 | Q-SET+QZ-DALI-DT6 QZ-DALI-DT6 |
| 10% | Non-Dim Power Supply with WD App Dongle | Non-Dim Power Supply with SW App Dongle | | |




ESSENTIALS EMBD-OPTICS (02) WD APPLICATIONS

24VDC Linear Fixtures - Recessed

| DIMMING PROTOCOL | INDOOR | | OUTDOOR | |
|---|---|---|---|--|
| | DW-HE Warm Dim Applications | WD | DW-HE Warm Dim Applications | WD |
| Phase | QZ-DW | QT-CAB-QZ-PH/0-10V QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP | Q-SET-QZ-DW QZ-DW | Q-SET-QZ-PH/0-10V QZ-PH/0-10V |
| 0-10V | QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QTM-eLED+0-10V QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP | Q-SET-QZ-DW QOM-eLED+WD QZ-DW | Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V |
| Lutron Athena | QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN | QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6-AWN | | |
| ECO System | | QTM-eLED(E) | | |
| DMX If using DW LED, wattage must be doubled | | QZ-DMX | | QZ-DMX |
| DALI-2: DT6 If using DW LED, wattage must be doubled except for AWN | QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6 | QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6 | QOM-eLED+DALI-DT6 | Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6 |
| DALI-2: DT8 If using DW LED, wattage must be doubled except for AWN | QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8 | | Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8 | |
| SCENE App Dimmed | Non-Dim Power Supply with WD App Dongle | Non-Dim Power Supply with SW App Dongle | | |

COMPATIBLE MOUNTING ACCESSORIES

MMA-02



Magnet Mount Accessory
of MG-02