





# ESSENTIALS LALO-FLAT (01) RGB

## 24VDC Linear Fixtures - Surface & Recessed



- Shallow, low-profile fixture for surface or recessed installations
- Choose from diffused, polar, frosted, or clear lens options for varying diode visibility and beam angles
- Three mounting options
- Features painted end caps to match extrusion finish
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Red, Green, and Blue LED allows for color changing applications
- Features 7 diodes per 2" cut point
- Optional plastic louver accessory available in white or black for added glare control

### INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	EFFICIENCY	LENS
LL1RGB	6.0	RGB		STD	

### ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: LL1RGB-6.0-RGB-DRY-STD-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E

<b>1</b> <b>PRODUCT</b> <b>LL1RGB</b> See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b> <b>6.0</b> 6.0W/ft	<b>3</b> <b>CCT</b> <b>RGB</b>	<b>4</b> <b>RATED</b> <b>DRY</b> IP20 <b>DMP</b> IP54 <b>WET</b> IP67 Can be suitable for exterior use, contact factory for more information	<b>5</b> <b>EFFICIENCY</b> <b>STD</b> Standard	<b>6</b> <b>LENS</b> <b>DF</b> Diffused <b>PR</b> Polar <b>FR</b> Frosted <b>CL</b> Clear For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. For optional snap-on louver ordering, see External Louver Accessory section on following pages
<b>7</b> <b>WIRE INPUT/OUTPUT</b> <b>SINGLE (Input only)</b> <b>S1</b> End Feed <b>S2</b> Bottom Feed  <b>PASS THROUGH (Input/output)</b> <b>P1</b> End Feed <b>P2</b> Bottom Feed	<b>8</b> <b>CONNECTOR/WIRE IN</b> <b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  <b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"	<b>9</b> <b>CONNECTOR/WIRE OUT</b> <b>CLS</b> Closed End (No feed)  <b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"	<b>10</b> <b>WIRE COLOR</b> <b>WH</b> White <b>BK</b> Black		
<b>11</b> <b>WIRE TYPE</b> <b>CL2</b> Class 2 <b>CL2P</b> Plenum Rated CL2P only available with bare wire leads (BW)	<b>12</b> <b>MOUNTING</b> <b>SST</b> Stainless Steel <b>M4</b> Low Profile Magnet <b>MG</b> Magnet	<b>13</b> <b>FINISH</b> <b>ST</b> Satin <b>BK</b> Black <b>CU</b> Custom Custom finishes require a longer lead time, consult factory	<b>14</b> <b>LENGTH (IN)</b> Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15</b> <b>EXACT/OPTIMAL</b> <b>O</b> Optimal Illumination <b>E</b> Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	

For continuous mounting, consider bottom feed.

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)



# ESSENTIALS LALO-FLAT (01) RGB

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS




## 2 DELIVERED LUMENS

[Calculated L70 = 55000 hrs]  
Tested with LL1RGB-6.0-RGB-DRY-STD

	Red		Green		Blue		All
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT
CL	79	633	159	523	45	469	256
FR	79	633	159	523	45	469	255
PR	71	633	143	523	40	469	230
DF	64	633	128	523	36	469	206

## 6 DIODE VISIBILITY



## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



Clear 78°



# ESSENTIALS LALO-FLAT (01) RGB


24VDC Linear Fixtures - Surface & Recessed

## TEMPERATURE RATINGS


		6.0 W/FT	
		Min	Max
DRY	Ambient Operating Temp - Surface	-13°F	105°F
DMP	Ambient Operating Temp - Surface	-13°F	-100°F
WET	Ambient Operating Temp - Surface	-13°F	-100°F

## 7 WIRE INPUT/OUTPUT


SINGLE (Input only)

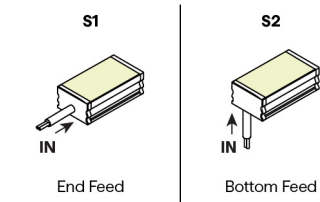

PASS THROUGH (Input/Output)

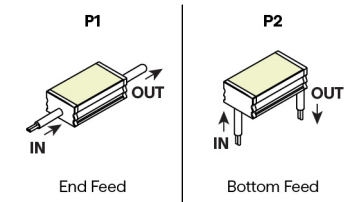


## CONFIGURATION OPTIONS

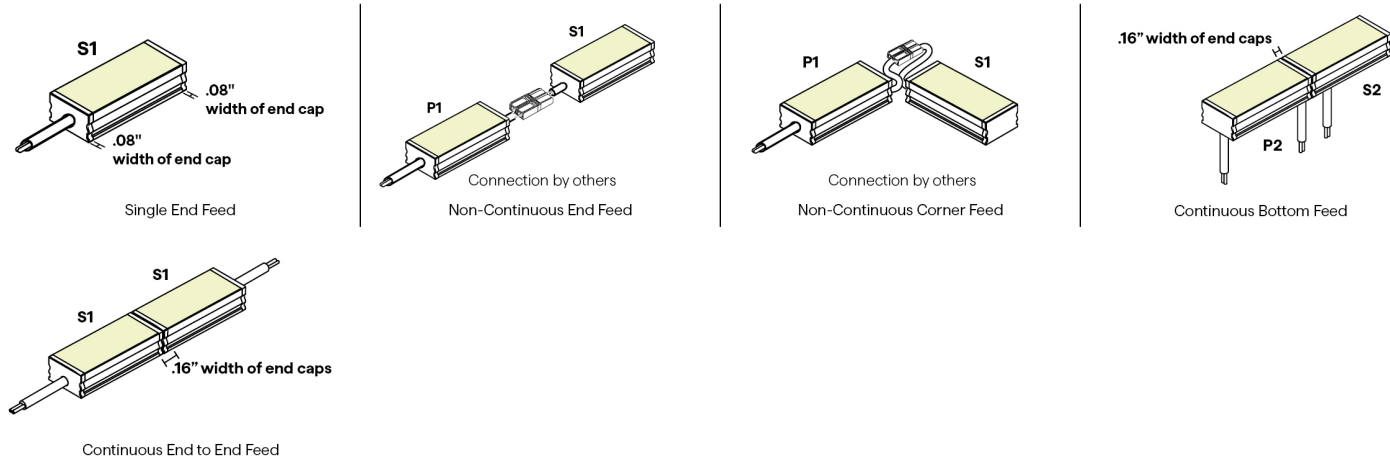

## 8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

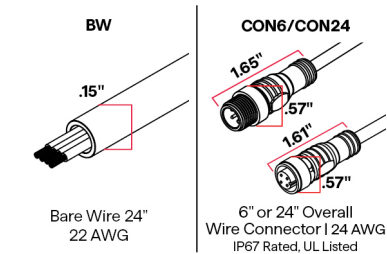

## 10 WIRE COLOR






# ESSENTIALS LALO-FLAT (01) RGB


24VDC Linear Fixtures - Surface & Recessed

## EXTERNAL LOUVER ACCESSORY



### PLASTIC

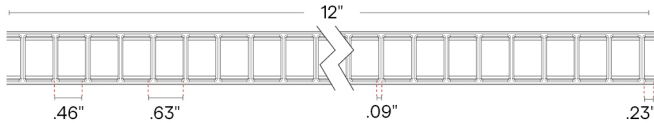

#### L1-XX



Lumen Multiplier  
WH BK




Profile with plastic louver

To order separately use  
LALO-L1-FLAT-KIT-WH or  
LALO-L1-FLAT-KIT-BK

## 12 MOUNTING

### SST




Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-01

Each clip comes with a #4 x 5/8" Flat Head SS

### M4




Low Profile Magnet

One M4 provided per foot.

To order separately use  
MG-04

### MMA-04




Magnet Mount  
Accessory for M4

Sold separately, to order use  
MMA-04

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface

### MG



Magnet Clip

One MG provided per foot

To order separately use MG-01

## 13 FINISH




Satin

Black

Custom finishes require a longer lead time, consult factory

### MMA-01



Magnet Mount  
Accessory of MG-01

Sold separately, to order use  
MMA-01

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface



# ESSENTIALS LALO-FLAT (01) RGB


## 24VDC Linear Fixtures - Surface & Recessed

### 14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)


[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.




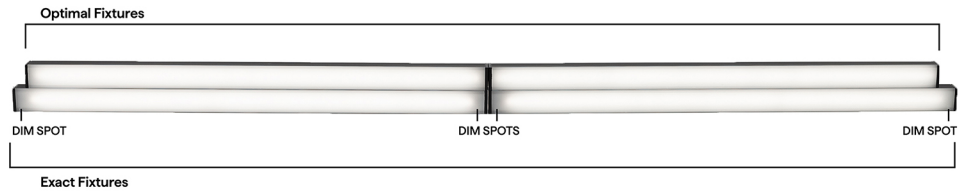


### RGB DRY DMP LENGTHS BY INCH

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	S1
	
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

#### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
				
12"	10.51"		10.86"	
13"	12.51"		12.86"	
14"	12.51"		12.86"	
15"	14.51"		14.86"	
16"	14.51"		14.86"	
17"	16.51"		16.86"	
18"	16.51"		16.86"	
19"	18.51"		18.86"	
20"	18.51"		18.86"	
21"	20.51"		20.86"	
22"	20.51"		20.86"	
23"	22.51"		22.86"	
24"	22.51"		22.86"	
36"	34.51"		34.86"	
48"	46.51"		46.86"	
60"	58.51"		58.86"	
72"	70.51"		70.86"	
84"	82.51"		82.86"	
96"	94.51"		94.86"	




# ESSENTIALS LALO-FLAT (01) RGB





24VDC Linear Fixtures - Surface & Recessed

## RGB WET LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	S1
	
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	<div>S1</div>  <div>End Feed</div>	<div>S2</div>  <div>Bottom Feed</div>	<div>P1</div>  <div>End Feed</div>	<div>P2</div>  <div>Bottom Feed</div>
12"	10.66"		11.06"	
13"	12.66"		11.06"	
14"	12.66"		13.06"	
15"	14.66"		13.06"	
16"	14.66"		15.06"	
17"	16.66"		15.06"	
18"	16.66"		17.06"	
19"	18.66"		17.06"	
20"	18.66"		19.06"	
21"	20.66"		19.06"	
22"	20.66"		21.06"	
23"	22.66"		21.06"	
24"	22.66"		23.06"	
36"	34.66"		35.06"	
48"	46.66"		47.06"	
60"	58.66"		59.06"	
72"	70.66"		71.06"	
84"	82.66"		83.06"	
96"	94.66"		95.06"	

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	RGB	RGB
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DMX QOM-eLED+PS-DALI-DT8 QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with RGB App Dongle	












DIMMING PROTOCOL	INDOOR	OUTDOOR
	RGB	RGB
DMX	QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8




# ESSENTIALS LALO-FLAT (01) RGB

24VDC Linear Fixtures - Surface & Recessed




## COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-M</b>  1.41" .71" Adjustable mounting bracket - Medium	<b>HINGE - HMB-L</b>  1.46" 1.29" Adjustable mounting bracket - Large	<b>HINGE - HMB-XL</b>  4" 1.46" Adjustable mounting bracket - XLarge	<b>Q-PIVOT</b>  .75" 1.03" Small mounting accessory	<b>Q-ANGLE</b>  2.23" 1.38" Adjustable mounting accessory	<b>QUOVA-STANDARD</b>  QUOVA Knife Edge	<b>VHB</b>  Double sided mounting tape	<b>NJ-MEDIUM</b>  J Mounting Bracket	<b>SD-L-MEDIUM</b>  L Mounting Bracket	<b>MMA-01</b>  .23" .75" Magnet Mount Accessory of MG-01
<b>MMA-04</b>  .19" .93" Magnet Mount Accessory of MG-04									

## COMPATIBLE WIRING ACCESSORIES

<b>Q-mini-J5</b>  2.80" 2.27" UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)
---

## COMPATIBLE CONTROL ACCESSORIES

<b>SCENE APP DONGLE</b>  1.36" 2.58" Wi-Fi or Bluetooth Connectivity	<b>IQ-DMX-STICK-GA2</b>  DMX controller for changing color & dimming	<b>IQ-DMX-STICK-DE3</b>  DMX controller for changing color & dimming
---	---	---