





# ESSENTIALS LALO-OPTICS (02)

## RGBW

### 24VDC Linear Fixtures - Surface & Recessed



- Shallow, low-profile linear fixture for surface or recessed installations
- Produces a 17° beam angle
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish
- Red, Green, and Blue LED paired with a specifiable white LED allow for color changing applications
- Optional plastic louver accessory available in white or black for added glare control

#### INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	EFFICIENCY	LENS
LL2RGBW	6.0			STD	17DEG

#### ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: LL2RGBW-6.0-30-DRY-P1-BW-BW-BK-CL2-SST-BK-48"-E

<b>1 PRODUCT</b> LL2RGBW See following pages for compatible power supplies.	<b>2 WATTS/FT</b> 6.0 6.0W/ft	<b>3 CCT</b> 27 30 RGBW-2700K RGBW-3000K	<b>4 RATED</b> DRY DMP IP20 IP54	<b>5 EFFICIENCY</b> STD Standard	<b>6 LENS</b> 17DEG Optical 17° For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. For optional snap-on louver ordering, see External Louver Accessory section on following pages.			
<b>7 WIRE INPUT/OUTPUT</b> <b>SINGLE (Input only)</b> S1 End Feed S2 Bottom Feed  <b>PASS THROUGH (Input/output)</b> P1 End Feed P2 Bottom Feed	<b>8 CONNECTOR/WIRE IN</b> BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"  BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"	<b>9 CONNECTOR/WIRE OUT</b> CLS Closed End (No feed)  BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"	<b>10 WIRE COLOR</b> WH White BK Black	<b>11 WIRE TYPE</b> CL2 Class 2 CL2P Plenum Rated  CL2P only available with bare wire leads (BW)	<b>12 MOUNTING</b> SST Stainless Steel M4 Low Profile Magnet MG Magnet	<b>13 FINISH</b> ST Satin BK Black CU Custom  Custom finishes require a longer lead time, consult factory	<b>14 LENGTH (IN)</b> Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15 EXACT/OPTIMAL</b> O Optimal Illumination E Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.

For continuous mounting, consider bottom feed.

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)


BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)



# ESSENTIALS LALO-OPTICS (02) RGBW

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS

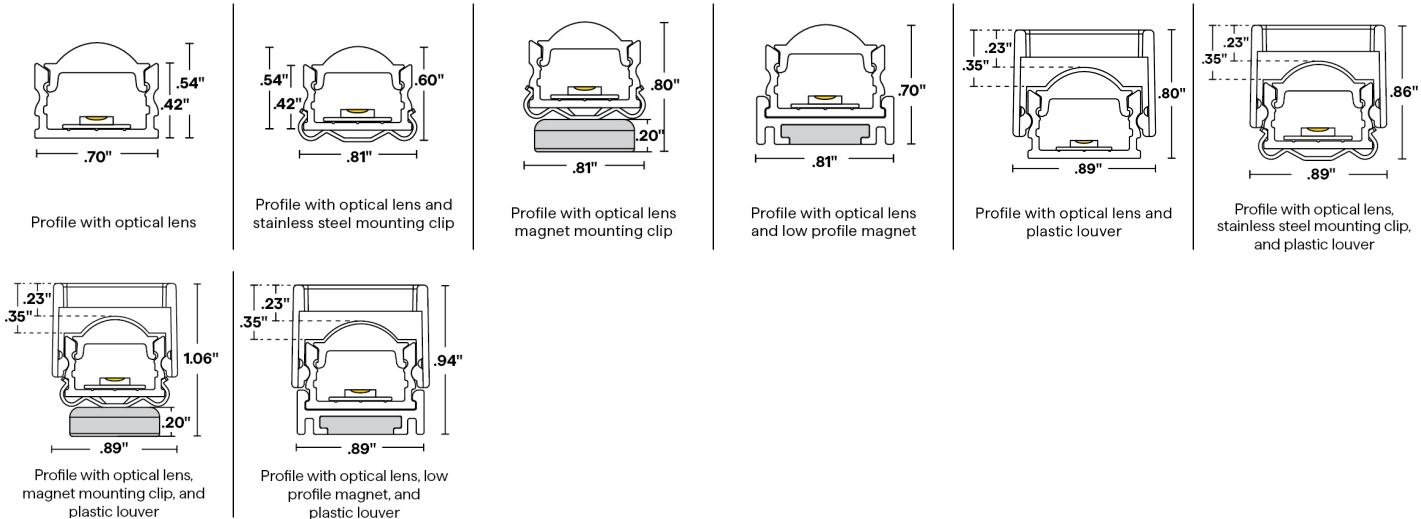

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]  
Tested with LL2RGBW-\*\*-30-DRY-STD

	Red		Green		Blue		3000K	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	CRI
17	40	631	106	513	32	464	135	93

## 6 DIODE VISIBILITY




Optical lens

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

17DEG



Optical 17°

## TEMPERATURE RATINGS

		6.0 W/FT		4.0 HE W/FT	
		Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	115°F	-4°F	125°F
DMP	Ambient Operating Temp - Surface	-4°F	110°F	-4°F	120°F
WET	Ambient Operating Temp - Surface	**	**	-4°F	120°F




# ESSENTIALS LALO-OPTICS (02) RGBW


24VDC Linear Fixtures - Surface & Recessed

## 7 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed




Bottom Feed

PASS THROUGH (Input/Output)




End Feed




Bottom Feed


## CONFIGURATION OPTIONS




Single End Feed




Connection by others  
Non-Continuous End Feed

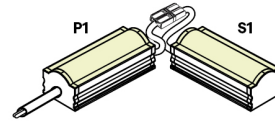

Connection by others  
Non-Continuous Corner Feed




Continuous Bottom Feed

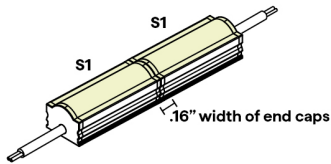

Continuous End to End Feed

## 8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out



Bare Wire 24"  
22 AWG



6" or 24" Overall  
Wire Connector | 24 AWG  
IP67 Rated, UL Listed

## 10 WIRE COLOR





# ESSENTIALS LALO-OPTICS (02) RGBW


24VDC Linear Fixtures - Surface & Recessed

## EXTERNAL LOUVER ACCESSORY

### PLASTIC




#### L1-XX



Lumen Multiplier  
WH BK



0.73 0.53




Profile with plastic louver

To order separately use  
LALO-L1-OPTICS-KIT-WH or  
LALO-L1-OPTICS-KIT-BK

## 12 MOUNTING

### SST




Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-01

Each clip comes with a #4 x 5/8" Flat Head SS

### M4




Low Profile Magnet

One M4 provided per foot.

To order separately use  
MG-04

### MMA-04




Magnet Mount  
Accessory for M4

Sold separately, to order use  
MMA-04

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface

### MG




Magnet Clip

One MG provided per foot

To order separately use MG-01

## 13 FINISH




Satin

Black

Custom finishes require a longer lead time, consult factory

### MMA-01



Magnet Mount  
Accessory of MG-01

Sold separately, to order use  
MMA-01

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface



# ESSENTIALS LALO-OPTICS (02) RGBW


24VDC Linear Fixtures - Surface & Recessed

## 14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)


[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.




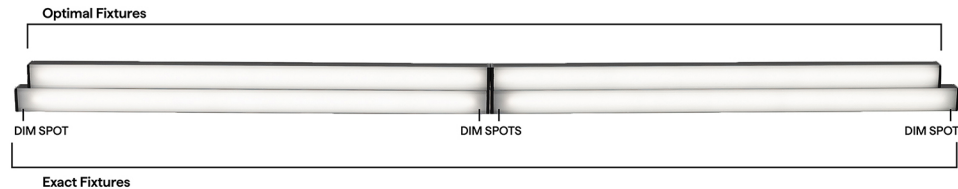


## RGBW DRY DMP LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	2"
13"	0.5"
14"	1"
15"	1.5"
16"	2"
17"	0.5"
18"	1"
19"	1.5"
20"	2"
21"	0.5"
22"	1"
23"	1.5"
24"	2"
36"	2"
48"	2"
60"	2"
72"	2"
84"	2"
96"	2"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
				
12"	8.51"		8.86"	
13"	12.51"		12.86"	
14"	12.51"		12.86"	
15"	12.51"		12.86"	
16"	12.51"		12.86"	
17"	16.51"		16.86"	
18"	16.51"		16.86"	
19"	16.51"		16.86"	
20"	16.51"		16.86"	
21"	20.51"		20.86"	
22"	20.51"		20.86"	
23"	20.51"		20.86"	
24"	20.51"		20.86"	
36"	32.51"		32.86"	
48"	44.51"		44.86"	
60"	56.51"		56.86"	
72"	68.51"		68.86"	
84"	80.51"		80.86"	
96"	92.51"		92.86"	

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	RGBW, RGBW-HE
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX
1%	QZ-DALI-DT8
10%	Non-Dim Power Supply with RGBW App Dongle



# ESSENTIALS LALO-OPTICS (02) RGBW

## 24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR
	RGBW, RGBW-HE
DMX	QTM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with RGBW App Dongle

### COMPATIBLE MOUNTING ACCESSORIES

**HINGE - HMB-M**

1.41" .71"

Adjustable mounting bracket - Medium

**HINGE - HMB-L**

1.46" 1.29"

Adjustable mounting bracket - Large

**HINGE - HMB-XL**

4" 1.46"

Adjustable mounting bracket - XLarge

**Q-PIVOT**

.75" 1.03"

Small mounting accessory

**Q-ANGLE**

2.23" 1.38"

Adjustable mounting accessory

**VHB**

Double sided mounting tape

**NU-GRAZER**

U Mounting Bracket

**NJ-GRAZER**

J Mounting Bracket

**BL-GRAZER**

Backwards L Mounting Bracket

**MMA-01**

.23" .75"

Magnet Mount Accessory of MG-01

**MMA-04**

.19" .93"

Magnet Mount Accessory of MG-04

### COMPATIBLE WIRING ACCESSORIES

**Q-mini-J5**

2.80" 2.27"

UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

### COMPATIBLE CONTROL ACCESSORIES

**SCENE APP DONGLE**

1.36" 2.58"

Wi-Fi or Bluetooth Connectivity

**IQ-DMX-STICK-GA2**

DMX controller for changing color & dimming

**IQ-DMX-STICK-DE3**

DMX controller for changing color & dimming