





# ESSENTIALS ROND-FLAT (01)

## STATIC COLOR

24VDC Linear Fixtures - Surface



- Surface mount linear fixture
- Choose from diffused, frosted or clear lens options
- Unique round profile can be rotated up to 45° in field with included mounting clips
- Stainless steel mounting clips
- Features painted end caps to match extrusion finish
- Red, Green, Blue or Amber LEDs available
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations

### INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	EFFICIENCY	LENS
RD1SC	5.0			STD	

### ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL
					SST			

Sample Part Number: **RD1SC-5.0-GR-DRY-STD-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E**

<b>1</b> <b>PRODUCT</b> RD1SC See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b> 5.0 5.0W/ft	<b>3</b> <b>CCT</b> A Amber B Blue G Green R Red	<b>4</b> <b>RATED</b> DRY IP20 DMP IP54	<b>5</b> <b>EFFICIENCY</b> STD Standard	<b>6</b> <b>LENS</b> DF Diffused FR Frosted CL Clear  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages
<b>7</b> <b>WIRE INPUT/OUTPUT</b> SINGLE (Input only) S1 End Feed  PASS THROUGH (Input/output) P1 End Feed	<b>8</b> <b>CONNECTOR/WIRE IN</b> BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"  BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	<b>9</b> <b>CONNECTOR/WIRE OUT</b> CLS Closed End (No feed)  BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	<b>10</b> <b>WIRE COLOR</b> WH White BK Black N/A For Barrel		
<b>11</b> <b>WIRE TYPE</b> CL2 Class 2 CL2P Plenum Rated N/A For Barrel  CL2P only available with bare wire leads (BW)	<b>12</b> <b>MOUNTING</b> SST Stainless Steel	<b>13</b> <b>FINISH</b> ST Satin BK Black CU Custom  Custom finishes require a longer lead time, consult factory	<b>14</b> <b>LENGTH (IN)</b> Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15</b> <b>EXACT/OPTIMAL</b> O Optimal Illumination E Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	

BW: Standard length is 24". Max length is 120".  
Request custom length by writing in part number next to BW (example: BW48)


BW: Standard length is 24". Max length is 120".  
Request custom length by writing in part number next to BW (example: BW48)



# ESSENTIALS ROND-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Surface

## 1 PRODUCT - DIMENSIONS

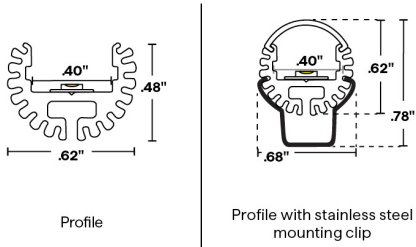


## 2 DELIVERED LUMENS

[Calculated L70 = 30000 hrs]  
Tested with RD1SC-5.0-\*\*-DRY-STD


	Red		Green		Blue		Amber	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH
CL	107	633	419	517	104	466	65	597
FR	105	633	411	517	102	466	63	597
DF	91	633	358	517	89	466	55	597

## 6 DIODE VISIBILITY



## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



Clear 93°



# ESSENTIALS ROND-FLAT (01) STATIC COLOR


24VDC Linear Fixtures - Surface

## TEMPERATURE RATINGS


		5.0 W/FT	
		Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	110°F
DMP	Ambient Operating Temp - Surface	-4°F	105°F

## 7 WIRE INPUT/OUTPUT


SINGLE (Input only)



PASS THROUGH (Input/Output)




## CONFIGURATION OPTIONS

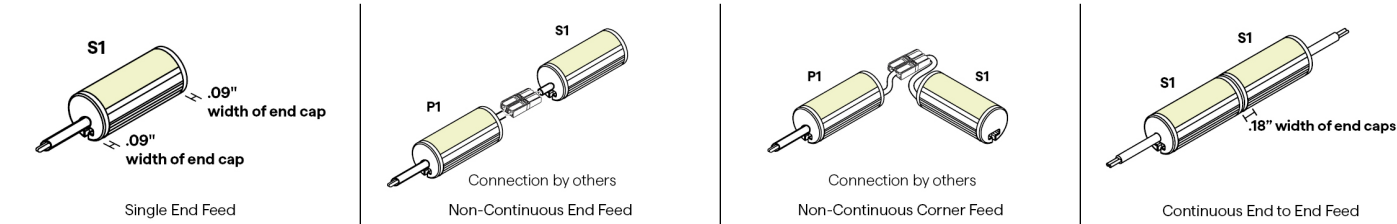

## 8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

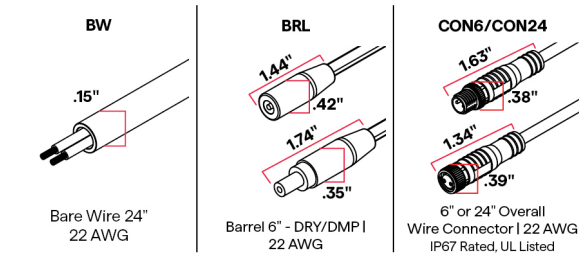

## 10 WIRE COLOR






# ESSENTIALS ROND-FLAT (01) STATIC COLOR

## 24VDC Linear Fixtures - Surface

### 12 MOUNTING

SST



Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-07

Each clip comes with a #4 x 5/8" Flat Head SS

### 13 FINISH



Satin  
Black


Custom finishes require a longer lead time, consult factory

### 14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

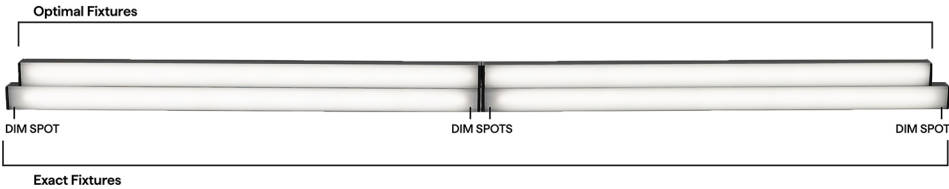

### SC DRY DMP LENGTHS BY INCH

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	S1
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

#### OPTIMAL LENGTH

Requested Nominal Length	S1	P1
12"	11.59"	11.34"
13"	12.59"	12.34"
14"	13.59"	13.34"
15"	14.59"	14.34"
16"	15.59"	15.34"
17"	16.59"	16.34"
18"	17.59"	17.34"
19"	18.59"	18.34"
20"	19.59"	19.34"
21"	20.59"	20.34"
22"	21.59"	21.34"
23"	22.59"	22.34"
24"	23.59"	23.34"
36"	35.59"	35.34"
48"	47.59"	47.34"
60"	59.59"	59.34"
72"	71.59"	71.34"
84"	83.59"	83.34"
96"	95.59"	95.34"



# ESSENTIALS ROND-FLAT (01) STATIC COLOR

## 24VDC Linear Fixtures - Surface

### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	SC
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle









# ESSENTIALS ROND-FLAT (01) STATIC COLOR








24VDC Linear Fixtures - Surface

DIMMING PROTOCOL	INDOOR
	SC
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)
DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle

## COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-S</b>  1.41" .51" Adjustable mounting bracket - Small	<b>HINGE - HMB-M</b>  1.41" .71" Adjustable mounting bracket - Medium	<b>HINGE - HMB-L</b>  1.46" 1.29" Adjustable mounting bracket - Large	<b>HINGE - HMB-XL</b>  1.46" 4" Adjustable mounting bracket - XLarge	<b>Q-PIVOT</b>  .75" 1.03" Small mounting accessory	<b>Q-ANGLE</b>  2.23" 1.38" Adjustable mounting accessory
--	---	---	--	---	---

## COMPATIBLE WIRING ACCESSORIES

<b>Q-mini-J</b>  1.25" 2" UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	<b>Q-mini-J5</b>  2.80" 2.27" UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	<b>BARREL-EXT</b>  8ft barrel cable extender DRY ONLY	<b>BARREL FOUR-FER</b>  Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	<b>CON120-EXT</b>  10ft Con cable extender DRY/DMP/WET	<b>CON FOUR-FER</b>  Splits lead from one to four LED Con connectors DRY/DMP/WET	<b>CON M - BARREL F</b>  Male con to barrel cable adaptor DRY/DMP
--	--	---	--	--	--	--



# ESSENTIALS ROND-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Surface

---

## COMPATIBLE APPS

### NFC APP



Read and write  
DMX addresses and  
adjust voltage