





ESSENTIALS TORQ-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed



- Surface mount linear fixture
- Choose from diffused, polar, frosted, clear 60°, or clear 70° lens options for varying diode visibility and beam angles
- Offered with an optional mounting tray
- Features all wire feed options
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish
- Suitable for exterior use when specified as wet
- Red, Green, Blue or Amber LEDs available
- Q-Tran Red & Amber LED products are Florida Fish and Wildlife Conservation Commission certified, making them safe for turtles and other wildlife
- Optional plastic louver accessory available in white or black for added glare control

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	EFFICIENCY	LENS
TQ1SC	5.0				

ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **TQ1SC-5.0-GR-DRY-WO-DF-P1-BW-BK-CL2-SST-BK-48"-E**

1	2	3	4	5	6
PRODUCT	WATTS/FT	CCT	RATED	EFFICIENCY	LENS
TQ1SC See following pages for compatible power supplies.	5.0 5.0W/ft	A Amber B Blue G Green R Red	DRY IP20 DMP IP54 WET IP67 Can be suitable for exterior use, contact factory for more information	STD Standard WO White Optics WhiteOptics - Internal coating, greater lumen output	DF Diffused PR Polar FR Frosted CL/60 Clear 60° CL/70 Clear 70° For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. For optional snap-on louver ordering, see External Louver Accessory section on following pages

7	8	9	10
WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR
SINGLE (Input only) S1 End Feed S2 Bottom Feed S3 Left Side Feed S4 Right Side Feed PASS THROUGH (Input/output) P1 End Feed P2 Bottom Feed P3 Left Side Feed P4 Right Side Feed	BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	CLS Closed End (No feed) BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	WH White BK Black N/A For Barrel wet barrel only available in black

For continuous mounting, consider bottom or side feed

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)


11	12	13	14	15
WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/OPTIMAL
CL2 Class 2 CL2P Plenum Rated N/A For Barrel CL2P only available with bare wire leads (BW)	SST Stainless Steel M4 Low Profile Magnet MG Magnet	ST Satin BK Black BZ Bronze CU Custom Custom finishes require a longer lead time, consult factory	Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.



ESSENTIALS TORQ-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

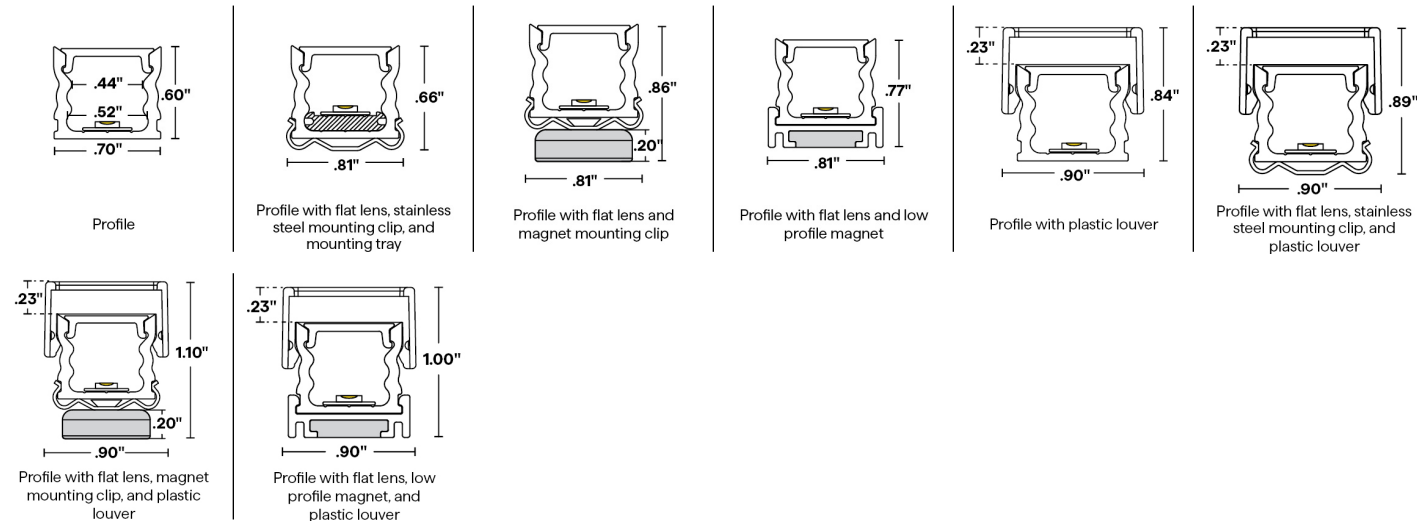

2 DELIVERED LUMENS

[Calculated L70 = 30000 hrs]
Tested with TQISC-5.0-**-DRY-STD

	Red		Green		Blue		Amber	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH
60	73	633	396	517	103	466	66	597
70	74	633	401	517	104	466	67	597
FR	72	633	388	517	101	466	65	597
PR	64	633	349	517	91	466	58	597
DF	58	633	315	517	82	466	53	597

[Calculated L70 = 30000 hrs]
Tested with TQISC-5.0-**-DRY-WO


	Red		Green		Blue		Amber	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH
60	80	633	435	517	113	466	73	597
70	84	633	453	517	118	466	76	597
FR	79	633	426	517	111	466	71	597
PR	71	633	385	517	100	466	64	597
DF	63	633	342	517	89	466	57	597



ESSENTIALS TORQ-FLAT (01) STATIC COLOR


24VDC Linear Fixtures - Surface & Recessed

6 DIODE VISIBILITY



PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.




TEMPERATURE RATINGS


		5.0 W/FT	
		Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	125°F
DMP	Ambient Operating Temp - Surface	-4°F	120°F
WET	Ambient Operating Temp - Surface	-4°F	120°F

7 WIRE INPUT/OUTPUT

SINGLE (Input only)

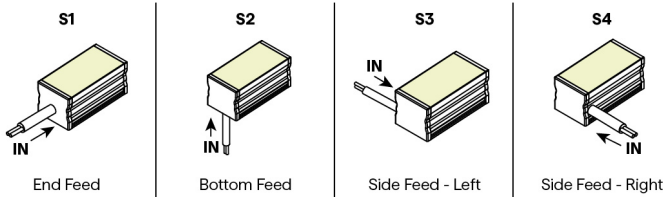

PASS THROUGH (Input/Output)

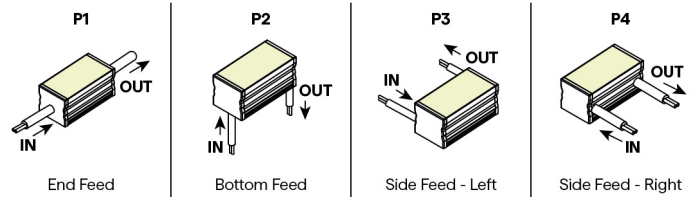




ESSENTIALS TORQ-FLAT (01) STATIC COLOR


24VDC Linear Fixtures - Surface & Recessed

CONFIGURATION OPTIONS

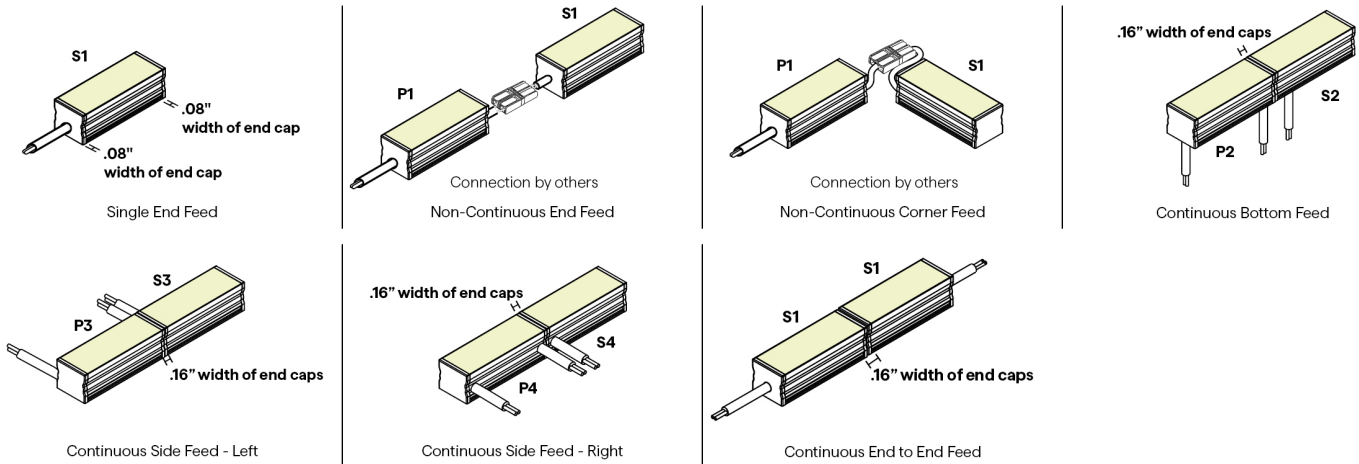

8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out



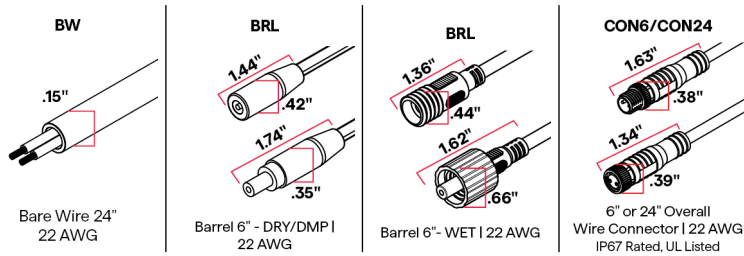


10 WIRE COLOR



EXTERNAL LOUVER ACCESSORY

PLASTIC

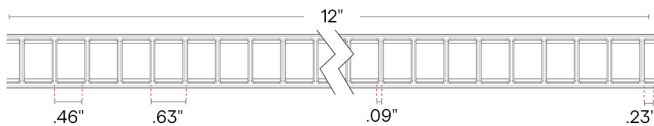

Profile with plastic louver

To order separately use
TORQ-L1-FLAT-KIT-WH or
TORQ-L1-FLAT-KIT-BK




ESSENTIALS TORQ-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

12 MOUNTING

SST




Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-01

Each clip comes with a #4 x 5/8" Flat Head SS

M4




Low Profile Magnet

One M4 provided per foot.

To order separately use MG-04

MMA-04




Magnet Mount
Accessory for M4

Sold separately, to order use MMA-04

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface

MG



Magnet Clip

One MG provided per foot

To order separately use MG-01

13 FINISH




Satin

Black

Bronze

Custom finishes require a longer lead time, consult factory

MMA-01



Magnet Mount
Accessory of MG-01

Sold separately, to order use MMA-01

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface


14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

Optimal Fixtures

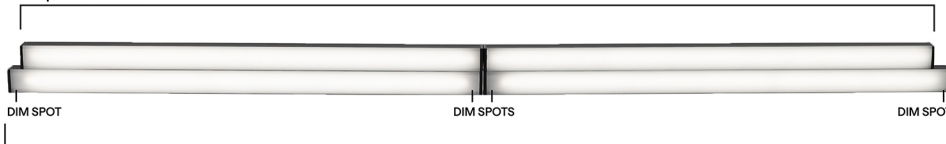

Exact Fixtures



ESSENTIALS TORQ-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

SC DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 	P1 & P2 	S3 & S4 	P3 & P4 
12"	10.41"	10.66"	10.26"	10.36"
13"	12.41"	12.66"	12.26"	12.36"
14"	12.41"	12.66"	12.26"	12.36"
15"	14.41"	14.66"	14.26"	14.36"
16"	14.41"	14.66"	14.26"	14.36"
17"	16.41"	16.66"	16.26"	16.36"
18"	16.41"	16.66"	16.26"	16.36"
19"	18.41"	18.66"	18.26"	18.36"
20"	18.41"	18.66"	18.26"	18.36"
21"	20.41"	20.66"	20.26"	20.36"
22"	20.41"	20.66"	20.26"	20.36"
23"	22.41"	22.66"	22.26"	22.36"
24"	22.41"	22.66"	22.26"	22.36"
36"	34.41"	34.66"	34.26"	34.36"
48"	46.41"	46.66"	46.26"	46.36"
60"	58.41"	58.66"	58.26"	58.36"
72"	70.41"	70.66"	70.26"	70.36"
84"	82.41"	82.66"	82.26"	82.36"
96"	94.41"	94.66"	94.26"	94.36"

SC WET LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 	P1 & P2 	S3 & S4 	P3 & P4 
12"	10.61"	10.76"	10.51"	10.61"
13"	12.61"	12.76"	12.51"	12.61"
14"	12.61"	12.76"	12.51"	12.61"
15"	14.61"	14.76"	14.51"	14.61"
16"	14.61"	14.76"	14.51"	14.61"
17"	16.61"	16.76"	16.51"	16.61"
18"	16.61"	16.76"	16.51"	16.61"
19"	18.61"	18.76"	18.51"	18.61"
20"	18.61"	18.76"	18.51"	18.61"
21"	20.61"	20.76"	20.51"	20.61"
22"	20.61"	20.76"	20.51"	20.61"
23"	22.61"	22.76"	22.51"	22.61"
24"	22.61"	22.76"	22.51"	22.61"
36"	34.61"	34.76"	34.51"	34.61"
48"	46.61"	46.76"	46.51"	46.61"
60"	58.61"	58.76"	58.51"	58.61"
72"	70.61"	70.76"	70.51"	70.61"
84"	82.61"	82.76"	82.51"	82.61"
96"	94.61"	94.76"	94.51"	94.61"



ESSENTIALS TORQ-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	SC	SC
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	












DIMMING PROTOCOL	INDOOR	OUTDOOR
	SC	SC
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	










ESSENTIALS TORQ-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M  1.41" .71" Adjustable mounting bracket - Medium	HINGE - HMB-L  1.46" 1.29" Adjustable mounting bracket - Large	HINGE - HMB-XL  1.46" 4" Adjustable mounting bracket - XLarge	Q-PIVOT  .75" 1.03" Small mounting accessory	Q-ANGLE  2.23" 1.38" Adjustable mounting accessory	NJ-MEDIUM  J Mounting Bracket	NJ-LARGE  J Mounting Bracket	NU-LARGE  U Mounting Bracket	SD-J-LARGE  J Mounting Bracket	MMA-01  .23" .75" Magnet Mount Accessory of MG-01
MMA-04  .19" .93" Magnet Mount Accessory of MG-04									

COMPATIBLE WIRING ACCESSORIES

Q-mini-J  2" 1.25" UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	Q-mini-J5  2.80" 2.27" UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	BARREL-EXT  8ft barrel cable extender DRY ONLY	BARREL FOUR-FER  Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	CON120-EXT  10ft Con cable extender DRY/DMP/WET	CON FOUR-FER  Splits lead from one to four LED Con connectors DRY/DMP/WET	CON M - BARREL F  Male con to barrel cable adaptor DRY/DMP
--	--	--	---	---	---	---