





ESSENTIALS WIDE-FLAT (01) WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface



- Wide, low-profile fixture for surface mount applications
- Choose from diffused, polar, frosted, or clear lens options for varying diode visibility and beam angles
- Mounting options include stainless steel or plastic clip
- Features painted end caps to match extrusion finish
- Side, back, and end feed wiring configurations available
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Used in applications to provide warmer CCTs as the light is dimmed
- When using DALI and DMX power supplies, LED wattage must be doubled



410.2 & 410.16
Closet Rated
in 1.5HE



DW-HE
ONLY



INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	EFFICIENCY	LENS
				STD	

ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **WE1WD-6.0-19/30-DRY-STD-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E**


1	PRODUCT	2	WATTS/FT	3	CCT	4	RATED	5	EFFICIENCY	6	LENS
	WE1WD LED engine is built with 2 wires suitable for phase dimming control. See following pages for compatible power supplies.		6.0 6.0W/ft		19/27 1900K/2700K 19/30 1900K/3000K		DRY IP20 WET IP67 Can be suitable for exterior use, contact factory for more information		STD Standard		DF Diffused PR Polar FR Frosted CL Clear For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages
	WE1DW WE1DW-USA Select USA option for BAA and BABA projects. Only DRY or WET ratings apply. LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.		1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE 4.0HE 4.0W/ft HE		20/27 2000K/2700K 20/30 2000K/3000K 27/40 2700K/4000K 27/55 2700K/5500K		DRY IP20				
			1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE		24/30 2400K/3000K 27/40 2700K/4000K		DMP IP54				
			1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE		20/27 2000K/2700K 20/30 2000K/3000K 27/40 2700K/4000K 27/55 2700K/5500K		WET IP67				
7	WIRE INPUT/OUTPUT	8	CONNECTOR/WIRE IN	9	CONNECTOR/WIRE OUT	10	WIRE COLOR				
	SINGLE (Input only) S1 End Feed S2 Bottom Feed S3 Left Side Feed S4 Right Side Feed PASS THROUGH (Input/output) P1 End Feed P2 Bottom Feed P3 Left Side Feed P4 Right Side Feed		BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"		CLS Closed End (No feed) BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"		WH White BK Black N/A For Barrel wet barrel only available in black				
For continuous mounting, consider bottom or side feed		BRL only available with WE1WD BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)		BRL only available with WE1WD BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)							
11	WIRE TYPE	12	MOUNTING	13	FINISH	14	LENGTH (IN)	15	EXACT/OPTIMAL		
	CL2 Class 2 CL2P Plenum Rated N/A For Barrel CL2P only available with bare wire leads (BW)		SST Stainless Steel PL Plastic Clip		ST Satin BK Black BZ Bronze CU Custom Custom finishes require a longer lead time, consult factory.		Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".		O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.		




ESSENTIALS WIDE-FLAT (01) WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface


1 PRODUCT - DIMENSIONS



Profile with flat lens



Profile with stainless steel mounting clip



Profile with plastic mounting clip

2 DELIVERED LUMENS


[Calculated L70 = 70000 hrs]
Tested with WE1WD-**-30-DRY-STD

	3000K	
	LM/FT	CRI
CL	407	97
FR	398	97
PR	378	97
DF	341	97

[Calculated L70 = 70000 hrs]
Tested with WE1DW-**-30-DRY-STD

	1.5HE W/FT		2.5HE W/FT		4.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
CL	160	98	253	98	393	98
FR	155	98	245	98	381	98
PR	150	98	236	98	367	98
DF	136	98	214	98	334	98


6 DIODE VISIBILITY

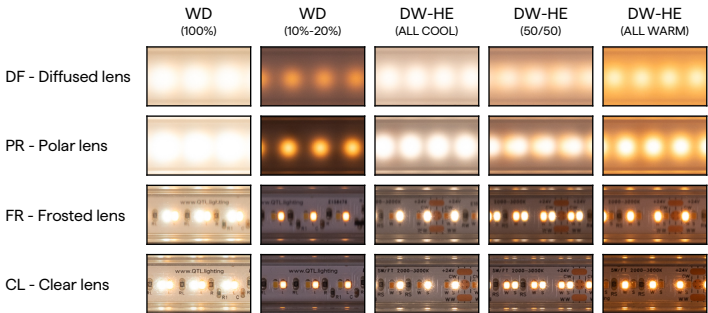

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

CL



Clear 97°



ESSENTIALS WIDE-FLAT (01) WARM DIM APPLICATIONS


24VDC Linear Fixtures - Surface

7 WIRE INPUT/OUTPUT


SINGLE (Input only)




End Feed



Bottom Feed




Side Feed - Left




Side Feed - Right


PASS THROUGH (Input/Output)




End Feed



Bottom Feed










Side Feed - Left








Side Feed - Right

CONFIGURATION OPTIONS

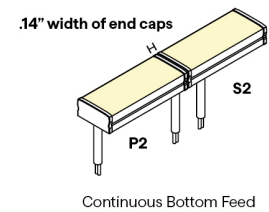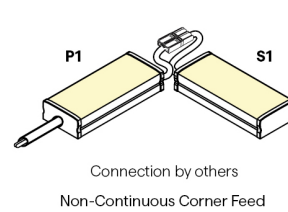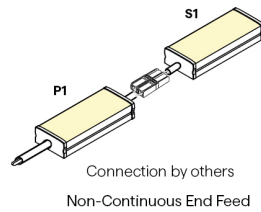

8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out



10 WIRE COLOR





ESSENTIALS WIDE-FLAT (01) WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface

12 MOUNTING

SST

Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-09

Each clip comes with a #4 x 5/8" Flat Head SS

PL

Plastic Clip
Black clip standard with black extrusion

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use PLC-03

Each clip comes with a #4 x 5/8" Flat Head SS

13 FINISH

Satin

Black

Bronze


Custom finishes require a longer lead time, consult factory

14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)


[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.








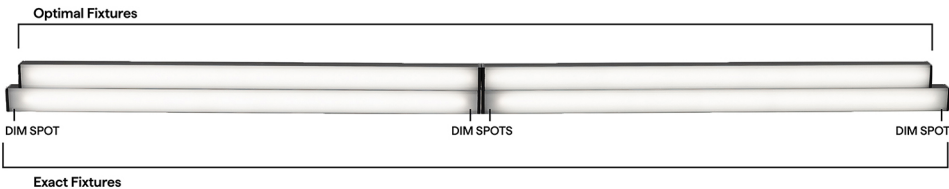


WD DRY LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2  	P1 & P2  	S3 & S4  	P3 & P4  
12"	10.41"	10.66"	10.26"	10.36"
13"	12.41"	12.66"	12.26"	12.36"
14"	12.41"	12.66"	12.26"	12.36"
15"	14.41"	14.66"	14.26"	14.36"
16"	14.41"	14.66"	14.26"	14.36"
17"	16.41"	16.66"	16.26"	16.36"
18"	16.41"	16.66"	16.26"	16.36"
19"	18.41"	18.66"	18.26"	18.36"
20"	18.41"	18.66"	18.26"	18.36"
21"	20.41"	20.66"	20.26"	20.36"
22"	20.41"	20.66"	20.26"	20.36"
23"	22.41"	22.66"	22.26"	22.36"
24"	22.41"	22.66"	22.26"	22.36"
36"	34.41"	34.66"	34.26"	34.36"
48"	46.41"	46.66"	46.26"	46.36"
60"	58.41"	58.66"	58.26"	58.36"
72"	70.41"	70.66"	70.26"	70.36"
84"	82.41"	82.66"	82.26"	82.36"
96"	94.41"	94.66"	94.26"	94.36"



ESSENTIALS WIDE-FLAT (01) WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface

WD WET LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH




Requested Nominal Length	S1 & S2 	P1 & P2 	S3 & S4 	P3 & P4 
12"	10.61"	10.76"	10.51"	10.61"
13"	12.61"	12.76"	12.51"	12.61"
14"	12.61"	12.76"	12.51"	12.61"
15"	14.61"	14.76"	14.51"	14.61"
16"	14.61"	14.76"	14.51"	14.61"
17"	16.61"	16.76"	16.51"	16.61"
18"	16.61"	16.76"	16.51"	16.61"
19"	18.61"	18.76"	18.51"	18.61"
20"	18.61"	18.76"	18.51"	18.61"
21"	20.61"	20.76"	20.51"	20.61"
22"	20.61"	20.76"	20.51"	20.61"
23"	22.61"	22.76"	22.51"	22.61"
24"	22.61"	22.76"	22.51"	22.61"
36"	34.61"	34.76"	34.51"	34.61"
48"	46.61"	46.76"	46.51"	46.61"
60"	58.61"	58.76"	58.51"	58.61"
72"	70.61"	70.76"	70.51"	70.61"
84"	82.61"	82.76"	82.51"	82.61"
96"	94.61"	94.76"	94.51"	94.61"

DW-HE DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 	P1 & P2 	S3 & S4 	P3 & P4 
12"	10.51"	10.86"	10.41"	10.51"
13"	12.51"	12.86"	12.41"	12.51"
14"	12.51"	12.86"	12.41"	12.51"
15"	14.51"	14.86"	14.41"	14.51"
16"	14.51"	14.86"	14.41"	14.51"
17"	16.51"	16.86"	16.41"	16.51"
18"	16.51"	16.86"	16.41"	16.51"
19"	18.51"	18.86"	18.41"	18.51"
20"	18.51"	18.86"	18.41"	18.51"
21"	20.51"	20.86"	20.41"	20.51"
22"	20.51"	20.86"	20.41"	20.51"
23"	22.51"	22.86"	22.41"	22.51"
24"	22.51"	22.86"	22.41"	22.51"
36"	34.51"	34.86"	34.41"	34.51"
48"	46.51"	46.86"	46.41"	46.51"
60"	58.51"	58.86"	58.41"	58.51"
72"	70.51"	70.86"	70.41"	70.51"
84"	82.51"	82.86"	82.41"	82.51"
96"	94.51"	94.86"	94.41"	94.51"




ESSENTIALS WIDE-FLAT (01) WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface

DW-HE WET LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 	P1 & P2 	S3 & S4 	P3 & P4 
12"	10.66"	11.06"	10.56"	10.76"
13"	12.66"	11.06"	12.56"	12.76"
14"	12.66"	13.06"	12.56"	12.76"
15"	14.66"	13.06"	14.56"	14.76"
16"	14.66"	15.06"	14.56"	14.76"
17"	16.66"	15.06"	16.56"	16.76"
18"	16.66"	17.06"	16.56"	16.76"
19"	18.66"	17.06"	18.56"	18.76"
20"	18.66"	19.06"	18.56"	18.76"
21"	20.66"	19.06"	20.56"	20.76"
22"	20.66"	21.06"	20.56"	20.76"
23"	22.66"	21.06"	22.56"	22.76"
24"	22.66"	23.06"	22.56"	22.76"
36"	34.66"	35.06"	34.56"	34.76"
48"	46.66"	47.06"	46.56"	46.76"
60"	58.66"	59.06"	58.56"	58.76"
72"	70.66"	71.06"	70.56"	70.76"
84"	82.66"	83.06"	82.56"	82.76"
96"	94.66"	95.06"	94.56"	94.76"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	DW-HE Warm Dim Applications	WD	DW-HE Warm Dim Applications	WD
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+WD QZ-DW	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QZ-DALI-DT8	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle		









ESSENTIALS WIDE-FLAT (01) WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	DW-HE Warm Dim Applications	WD	DW-HE Warm Dim Applications	WD
Phase	QZ-DW	QT-CAB-QZ-PH/0-10V QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QZ-DW	Q-SET-QZ-PH/0-10V QZ-PH/0-10V
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QTM-eLED+0-10V QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QOM-eLED+WD QZ-DW	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN	QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6-AWN		
ECO System		QTM-eLED(E)		
DMX If using DW LED, wattage must be doubled		QZ-DMX		QZ-DMX
DALI-2: DT6 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QOM-eLED+DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
DALI-2: DT8 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8		Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8	
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle		

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M	HINGE - HMB-L	HINGE - HMB-XL	Q-PIVOT	Q-ANGLE	QUOVA-STANDARD
 1.41" .71"	 1.46" 1.29"	 4" 1.46"	 .75" 1.03"	 2.23" 1.38"	
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	QUOVA Knife Edge