





ESSENTIALS WIDE-FLAT (01)

STATIC COLOR

24VDC Linear Fixtures - Surface



- Wide, low-profile fixture for surface mount applications
- Choose from diffused, polar, frosted, or clear lens options for varying diode visibility and beam angles
- Mounting options include stainless steel or plastic clip
- Features painted end caps to match extrusion finish
- Side, back, and end feed wiring configurations available
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Red, Green, Blue or Amber LEDs available
- Q-Tran Red & Amber LED products are Florida Fish and Wildlife Conservation Commission certified, making them safe for turtles and other wildlife

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	EFFICIENCY	LENS
WE1SC	5.0			STD	

ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **WE1SC-5.0-GR-DRY-STD-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E**

1 PRODUCT WE1SC See following pages for compatible power supplies.	2 WATTS/FT 5.0 5.0W/ft	3 CCT A Amber B Blue G Green R Red	4 RATED DRY IP20 DMP IP54 WET IP67 Can be suitable for exterior use, contact factory for more information	5 EFFICIENCY STD Standard	6 LENS DF Diffused PR Polar FR Frosted CL Clear For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages
7 WIRE INPUT/OUTPUT SINGLE (Input only) S1 End Feed S2 Bottom Feed S3 Left Side Feed S4 Right Side Feed PASS THROUGH (Input/output) P1 End Feed P2 Bottom Feed P3 Left Side Feed P4 Right Side Feed	8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	9 CONNECTOR/WIRE OUT CLS Closed End (No feed) BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	10 WIRE COLOR WH White BK Black N/A For Barrel wet barrel only available in black		
11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated N/A For Barrel CL2P only available with bare wire leads (BW)	12 MOUNTING SST Stainless Steel PL Plastic Clip	13 FINISH ST Satin BK Black BZ Bronze CU Custom Custom finishes require a longer lead time, consult factory	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	

For continuous mounting, consider bottom or side feed

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)


BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)




ESSENTIALS WIDE-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Surface


1 PRODUCT - DIMENSIONS



Profile with flat lens



Profile with stainless steel mounting clip




Profile with plastic mounting clip

2 DELIVERED LUMENS

[Calculated L70 = 30000 hrs]
Tested with WE1SC-5.0-**-DRY-STD


	Red		Green		Blue		Amber	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH
CL	116	633	455	517	113	466	70	597
FR	113	633	442	517	110	466	68	597
PR	108	633	425	517	106	466	66	597
DF	98	633	386	517	96	466	60	597

6 DIODE VISIBILITY



PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



Clear 97°



ESSENTIALS WIDE-FLAT (01) STATIC COLOR


24VDC Linear Fixtures - Surface

7 WIRE INPUT/OUTPUT


SINGLE (Input only)




End Feed



Bottom Feed




Side Feed - Left




Side Feed - Right


PASS THROUGH (Input/Output)




End Feed



Bottom Feed




Side Feed - Left




Side Feed - Right


CONFIGURATION OPTIONS




Single End Feed




Connection by others
Non-Continuous End Feed




Connection by others
Non-Continuous Corner Feed




Continuous Bottom Feed



Continuous Side Feed - Left




Continuous Side Feed - Right




Continuous End to End Feed

8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out




Bare Wire 24"
22 AWG



Barrel 6" - DRY/DMP |
22 AWG



Barrel 6" - WET | 22 AWG



6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

10 WIRE COLOR






ESSENTIALS WIDE-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Surface

12 MOUNTING

SST




Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-09

Each clip comes with a #4 x 5/8" Flat Head SS

PL



Plastic Clip
Black clip standard with black extrusion

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use PLC-03

Each clip comes with a #4 x 5/8" Flat Head SS

13 FINISH



Satin

Black

Bronze


Custom finishes require a longer lead time, consult factory

14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)


[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.


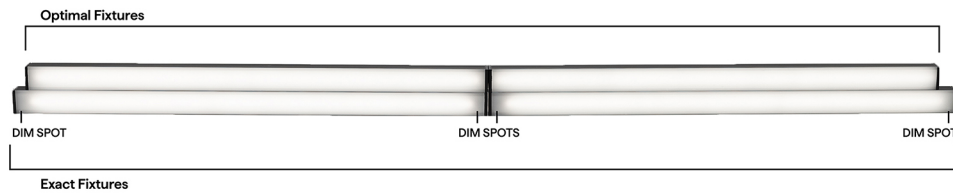


SC DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 	P1 & P2 	S3 & S4 	P3 & P4 
12"	10.41"	10.66"	10.26"	10.36"
13"	12.41"	12.66"	12.26"	12.36"
14"	12.41"	12.66"	12.26"	12.36"
15"	14.41"	14.66"	14.26"	14.36"
16"	14.41"	14.66"	14.26"	14.36"
17"	16.41"	16.66"	16.26"	16.36"
18"	16.41"	16.66"	16.26"	16.36"
19"	18.41"	18.66"	18.26"	18.36"
20"	18.41"	18.66"	18.26"	18.36"
21"	20.41"	20.66"	20.26"	20.36"
22"	20.41"	20.66"	20.26"	20.36"
23"	22.41"	22.66"	22.26"	22.36"
24"	22.41"	22.66"	22.26"	22.36"
36"	34.41"	34.66"	34.26"	34.36"
48"	46.41"	46.66"	46.26"	46.36"
60"	58.41"	58.66"	58.26"	58.36"
72"	70.41"	70.66"	70.26"	70.36"
84"	82.41"	82.66"	82.26"	82.36"
96"	94.41"	94.66"	94.26"	94.36"



ESSENTIALS WIDE-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Surface

SC WET LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	S1 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2  End Feed		P1 & P2  End Feed		S3 & S4  Side Feed - Left		P3 & P4  Side Feed - Left	
	S1	S2	P1	P2	S3	S4	P3	P4
12"	10.61"		10.76"		10.51"		10.61"	
13"	12.61"		12.76"		12.51"		12.61"	
14"	12.61"		12.76"		12.51"		12.61"	
15"	14.61"		14.76"		14.51"		14.61"	
16"	14.61"		14.76"		14.51"		14.61"	
17"	16.61"		16.76"		16.51"		16.61"	
18"	16.61"		16.76"		16.51"		16.61"	
19"	18.61"		18.76"		18.51"		18.61"	
20"	18.61"		18.76"		18.51"		18.61"	
21"	20.61"		20.76"		20.51"		20.61"	
22"	20.61"		20.76"		20.51"		20.61"	
23"	22.61"		22.76"		22.51"		22.61"	
24"	22.61"		22.76"		22.51"		22.61"	
36"	34.61"		34.76"		34.51"		34.61"	
48"	46.61"		46.76"		46.51"		46.61"	
60"	58.61"		58.76"		58.51"		58.61"	
72"	70.61"		70.76"		70.51"		70.61"	
84"	82.61"		82.76"		82.51"		82.61"	
96"	94.61"		94.76"		94.51"		94.61"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	SC	SC
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	









ESSENTIALS WIDE-FLAT (01) STATIC COLOR








24VDC Linear Fixtures - Surface

DIMMING PROTOCOL	INDOOR	OUTDOOR
	SC	SC
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M  1.41" .71" Adjustable mounting bracket - Medium	HINGE - HMB-L  1.46" 1.29" Adjustable mounting bracket - Large	HINGE - HMB-XL  1.46" 4" Adjustable mounting bracket - XLarge	Q-PIVOT  .75" 1.03" Small mounting accessory	Q-ANGLE  2.23" 1.38" Adjustable mounting accessory	QUOVA-STANDARD  QUOVA Knife Edge
--	--	---	--	--	--

COMPATIBLE WIRING ACCESSORIES

Q-mini-J  2" 1.25" UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	Q-mini-J5  2.80" 2.27" UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	BARREL-EXT  8ft barrel cable extender DRY ONLY	BARREL FOUR-FER  Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	CON120-EXT  10ft Con cable extender DRY/DMP/WET	CON FOUR-FER  Splits lead from one to four LED Con connectors DRY/DMP/WET	CON M - BARREL F  Male con to barrel cable adaptor DRY/DMP
---	---	---	--	--	--	--



ESSENTIALS WIDE-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Surface

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage