



ESSENTIALS WIDE-FLAT (01)

STATIC WHITE

24VDC Linear Fixtures - Surface





410.2 & 410.16
Closet Rated
up to 4.0W/ft



SW/SW-HE
ONLY



SW, SW-HE
ONLY



- Wide, low-profile fixture for surface mount applications
- Choose from diffused, polar, frosted, or clear lens options for varying diode visibility and beam angles
- Mounting options include stainless steel or plastic clip
- Features painted end caps to match extrusion finish
- Side, back, and end feed wiring configurations available
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Can be suitable for exterior use when specified as wet, contact factory for more information

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	EFFICIENCY	LENS
				STD	

ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **WE1SW-5.0-30-DRY-STD-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E**

<div>1</div> <div>PRODUCT</div> <div><div>WE1SW</div><div>WE1SW-USA</div><div>Select USA option for BAA and BABA projects. SW and SW-HE only. Only DRY or WET ratings apply.</div><div>See following pages for compatible power supplies.</div></div>	<div>2</div> <div>WATTS/FT</div> <div><div><div>1.5</div><div>1.5W/ft</div></div><div><div>3.0</div><div>3.0W/ft</div></div><div><div>4.0</div><div>4.0W/ft</div></div><div><div>5.0</div><div>5.0W/ft</div></div><div><div>1.5HE</div><div>1.5W/ft HE</div></div><div><div>3.0HE</div><div>3.0W/ft HE</div></div><div><div>6.0HE</div><div>6.0W/ft HE</div></div><div><div>3.0HE+</div><div>3.0W/ft HE+</div></div><div><div>6.0HE+</div><div>6.0W/ft HE+</div></div><div><div>1.5</div><div>1.5W/ft</div></div><div><div>3.0</div><div>3.0W/ft</div></div><div><div>4.0</div><div>4.0W/ft</div></div><div><div>5.0</div><div>5.0W/ft</div></div><div><div>1.5HE</div><div>1.5W/ft HE</div></div><div><div>3.0HE</div><div>3.0W/ft HE</div></div><div><div>6.0HE</div><div>6.0W/ft HE</div></div></div>	<div>3</div> <div>CCT</div> <div><div><div>20</div><div>2000K</div></div><div><div>22</div><div>2200K</div></div><div><div>24</div><div>2400K</div></div><div><div>27</div><div>2700K</div></div><div><div>30</div><div>3000K</div></div><div><div>35</div><div>3500K</div></div><div><div>40</div><div>4000K</div></div><div><div>27</div><div>2700K</div></div><div><div>30</div><div>3000K</div></div><div><div>35</div><div>3500K</div></div><div><div>40</div><div>4000K</div></div><div><div>24</div><div>2400K</div></div><div><div>27</div><div>2700K</div></div><div><div>30</div><div>3000K</div></div><div><div>35</div><div>3500K</div></div><div><div>40</div><div>4000K</div></div></div>	<div>4</div> <div>RATED</div> <div><div><div>DRY</div><div>IP20</div></div><div><div>WET</div><div>IP67</div></div><div>Can be suitable for exterior use, contact factory for more information</div><div><div>DMP</div><div>IP54</div></div></div>	<div>5</div> <div>EFFICIENCY</div> <div><div>STD</div><div>Standard</div></div>	<div>6</div> <div>LENS</div> <div><div><div>DF</div><div>Diffused</div></div><div><div>PR</div><div>Polar</div></div><div><div>FR</div><div>Frosted</div></div><div><div>CL</div><div>Clear</div></div><div>For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages</div></div>
<div>7</div> <div>WIRE INPUT/OUTPUT</div> <div><div><div>SINGLE (Input only)</div><div><div>S1</div><div>End Feed</div></div><div><div>S2</div><div>Bottom Feed</div></div><div><div>S3</div><div>Left Side Feed</div></div><div><div>S4</div><div>Right Side Feed</div></div></div><div><div>PASS THROUGH (Input/output)</div><div><div>P1</div><div>End Feed</div></div><div><div>P2</div><div>Bottom Feed</div></div><div><div>P3</div><div>Left Side Feed</div></div><div><div>P4</div><div>Right Side Feed</div></div></div></div>	<div>8</div> <div>CONNECTOR/WIRE IN</div> <div><div><div>BW</div><div>Bare Wire (Standard 24")</div></div><div><div>BRL</div><div>Barrel</div></div><div><div>CON6</div><div>Connector 6"</div></div><div><div>CON24</div><div>Connector 24"</div></div><div><div>BW</div><div>Bare Wire (Standard 24")</div></div><div><div>BRL</div><div>Barrel</div></div><div><div>CON6</div><div>Connector 6"</div></div><div><div>CON24</div><div>Connector 24"</div></div></div>	<div>9</div> <div>CONNECTOR/WIRE OUT</div> <div><div><div>CLS</div><div>Closed End (No feed)</div></div><div><div>BW</div><div>Bare Wire (Standard 24")</div></div><div><div>BRL</div><div>Barrel</div></div><div><div>CON6</div><div>Connector 6"</div></div><div><div>CON24</div><div>Connector 24"</div></div></div>	<div>10</div> <div>WIRE COLOR</div> <div><div><div>WH</div><div>White</div></div><div><div>BK</div><div>Black</div></div><div><div>N/A</div><div>For Barrel</div></div><div>wet barrel only available in black</div></div>		
<div>For continuous mounting, consider bottom or side feed</div>					
<div>BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div>					
<div>BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div>					
<div>11</div> <div>WIRE TYPE</div> <div><div><div>CL2</div><div>Class 2</div></div><div><div>CL2P</div><div>Plenum Rated</div></div><div><div>N/A</div><div>For Barrel</div></div><div>CL2P only available with bare wire leads (BW)</div></div>	<div>12</div> <div>MOUNTING</div> <div><div><div>SST</div><div>Stainless Steel</div></div><div><div>PL</div><div>Plastic Clip</div></div></div>	<div>13</div> <div>FINISH</div> <div><div><div>ST</div><div>Satin</div></div><div><div>BK</div><div>Black</div></div><div><div>BZ</div><div>Bronze</div></div><div><div>CU</div><div>Custom</div></div><div>Custom finishes require a longer lead time, consult factory</div></div>	<div>14</div> <div>LENGTH (IN)</div> <div><div>Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".</div></div>	<div>15</div> <div>EXACT/OPTIMAL</div> <div><div><div>O</div><div>Optimal Illumination</div></div><div><div>E</div><div>Exact Specified Length</div></div><div>Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.</div></div>	

For continuous mounting, consider bottom or side feed

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)


BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)




ESSENTIALS WIDE-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface


1 PRODUCT - DIMENSIONS



Profile with flat lens



Profile with stainless steel mounting clip




Profile with plastic mounting clip

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 50000 for HE+]
Tested with WE1SW-**-30-DRY-STD

	1.5 W/FT		1.5HE W/FT		3.0 W/FT		3.0HE W/FT		3.0HE+ W/FT		4.0 W/FT		5.0 W/FT		6.0HE W/FT		6.0HE+ W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
CL	155	98	202	98	270	98	371	98	528	92	335	98	408	98	703	98	976	92
FR	150	98	202	98	262	98	371	98	512	92	326	98	396	98	702	98	947	92
PR	144	98	191	98	252	98	351	98	493	92	313	98	381	98	665	98	911	92
DF	131	98	172	98	229	98	315	98	448	92	285	98	346	98	597	98	828	92


6 DIODE VISIBILITY

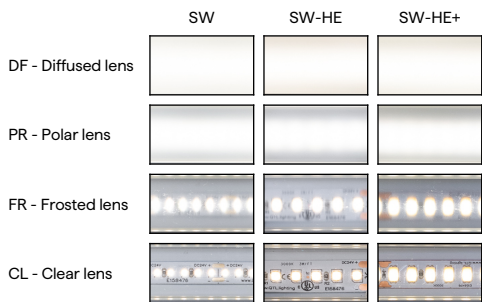

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

CL



Clear 97°




ESSENTIALS WIDE-FLAT (01) STATIC WHITE


24VDC Linear Fixtures - Surface

7 WIRE INPUT/OUTPUT


SINGLE (Input only)




End Feed



Bottom Feed




Side Feed - Left




Side Feed - Right


PASS THROUGH (Input/Output)




End Feed



Bottom Feed










Side Feed - Left







Side Feed - Right

CONFIGURATION OPTIONS

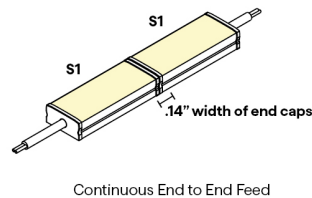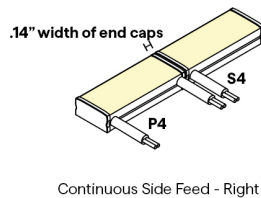


8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out



10 WIRE COLOR






ESSENTIALS WIDE-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface

12 MOUNTING

SST




Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-09

Each clip comes with a #4 x 5/8" Flat Head SS

PL



Plastic Clip
Black clip standard with black extrusion

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use PLC-03

Each clip comes with a #4 x 5/8" Flat Head SS

13 FINISH



Satin

Black

Bronze


Custom finishes require a longer lead time, consult factory

14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)


[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

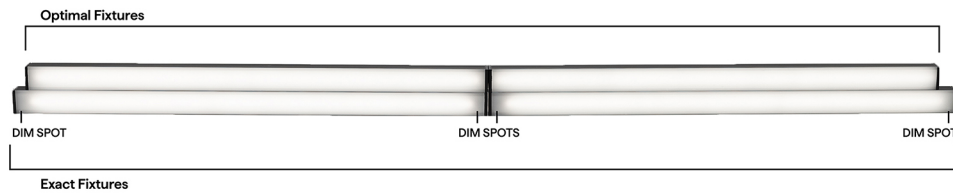

SW DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2  End Feed		P1 & P2  End Feed		S3 & S4  Side Feed - Left		P3 & P4  Side Feed - Left	
	S1	S2	P1	P2	S3	S4	P3	P4
12"	11.41"		11.66"		11.26"		11.36"	
13"	12.41"		12.66"		12.26"		12.36"	
14"	13.41"		13.66"		13.26"		13.36"	
15"	14.41"		14.66"		14.26"		14.36"	
16"	15.41"		15.66"		15.26"		15.36"	
17"	16.41"		16.66"		16.26"		16.36"	
18"	17.41"		17.66"		17.26"		17.36"	
19"	18.41"		18.66"		18.26"		18.36"	
20"	19.41"		19.66"		19.26"		19.36"	
21"	20.41"		20.66"		20.26"		20.36"	
22"	21.41"		21.66"		21.26"		21.36"	
23"	22.41"		22.66"		22.26"		22.36"	
24"	23.41"		23.66"		23.26"		23.36"	
36"	35.41"		35.66"		35.26"		35.36"	
48"	47.41"		47.66"		47.26"		47.36"	
60"	59.41"		59.66"		59.26"		59.36"	
72"	71.41"		71.66"		71.26"		71.36"	
84"	83.41"		83.66"		83.26"		83.36"	
96"	95.41"		95.66"		95.26"		95.36"	



ESSENTIALS WIDE-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface

SW WET LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 	P1 & P2 	S3 & S4 	P3 & P4 
12"	11.56"	11.71"	11.46"	11.56"
13"	12.56"	12.71"	12.46"	12.56"
14"	13.56"	13.71"	13.46"	13.56"
15"	14.56"	14.71"	14.46"	14.56"
16"	15.56"	15.71"	15.46"	15.56"
17"	16.56"	16.71"	16.46"	16.56"
18"	17.56"	17.71"	17.46"	17.56"
19"	18.56"	18.71"	18.46"	18.56"
20"	19.56"	19.71"	19.46"	19.56"
21"	20.56"	20.71"	20.46"	20.56"
22"	21.56"	21.71"	21.46"	21.56"
23"	22.56"	22.71"	22.46"	22.56"
24"	23.56"	23.71"	23.46"	23.56"
36"	35.56"	35.71"	35.46"	35.56"
48"	47.56"	47.71"	47.46"	47.56"
60"	59.56"	59.71"	59.46"	59.56"
72"	71.56"	71.71"	71.46"	71.56"
84"	83.56"	83.71"	83.46"	83.56"
96"	95.56"	95.71"	95.46"	95.56"

SW-HE, SW-HE+ DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 	P1 & P2 	S3 & S4 	P3 & P4 
12"	10.41"	10.66"	10.26"	10.36"
13"	12.41"	12.66"	12.26"	12.36"
14"	12.41"	12.66"	12.26"	12.36"
15"	14.41"	14.66"	14.26"	14.36"
16"	14.41"	14.66"	14.26"	14.36"
17"	16.41"	16.66"	16.26"	16.36"
18"	16.41"	16.66"	16.26"	16.36"
19"	18.41"	18.66"	18.26"	18.36"
20"	18.41"	18.66"	18.26"	18.36"
21"	20.41"	20.66"	20.26"	20.36"
22"	20.41"	20.66"	20.26"	20.36"
23"	22.41"	22.66"	22.26"	22.36"
24"	22.41"	22.66"	22.26"	22.36"
36"	34.41"	34.66"	34.26"	34.36"
48"	46.41"	46.66"	46.26"	46.36"
60"	58.41"	58.66"	58.26"	58.36"
72"	70.41"	70.66"	70.26"	70.36"
84"	82.41"	82.66"	82.26"	82.36"
96"	94.41"	94.66"	94.26"	94.36"




ESSENTIALS WIDE-FLAT (01) STATIC WHITE








24VDC Linear Fixtures - Surface

SW-HE, SW-HE+ WET LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2  End Feed	S2  Bottom Feed	P1 & P2  End Feed	P2  Bottom Feed	S3 & S4  Side Feed - Left	S4  Side Feed - Right	P3 & P4  Side Feed - Left	P4  Side Feed - Right
12"	10.61"		10.76"		10.51"		10.61"	
13"	12.61"		12.76"		12.51"		12.61"	
14"	12.61"		12.76"		12.51"		12.61"	
15"	14.61"		14.76"		14.51"		14.61"	
16"	14.61"		14.76"		14.51"		14.61"	
17"	16.61"		16.76"		16.51"		16.61"	
18"	16.61"		16.76"		16.51"		16.61"	
19"	18.61"		18.76"		18.51"		18.61"	
20"	18.61"		18.76"		18.51"		18.61"	
21"	20.61"		20.76"		20.51"		20.61"	
22"	20.61"		20.76"		20.51"		20.61"	
23"	22.61"		22.76"		22.51"		22.61"	
24"	22.61"		22.76"		22.51"		22.61"	
36"	34.61"		34.76"		34.51"		34.61"	
48"	46.61"		46.76"		46.51"		46.61"	
60"	58.61"		58.76"		58.51"		58.61"	
72"	70.61"		70.76"		70.51"		70.61"	
84"	82.61"		82.76"		82.51"		82.61"	
96"	94.61"		94.76"		94.51"		94.61"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED	









ESSENTIALS WIDE-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN		
ECO System	QTM-eLED(E)	QTM-eLED(E)		
DMX	QZ-DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle		

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M  1.41" .71" Adjustable mounting bracket - Medium	HINGE - HMB-L  1.46" 1.29" Adjustable mounting bracket - Large	HINGE - HMB-XL  1.46" 4" Adjustable mounting bracket - XLarge	Q-PIVOT  .75" 1.03" Small mounting accessory	Q-ANGLE  2.23" 1.38" Adjustable mounting accessory	QUOVA-STANDARD  QUOVA Knife Edge
--	--	---	--	--	--