





ESSENTIALS TORQ- ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed



- Surface mount linear fixture
- Features high quality LED strips encapsulated in polyurethane in a rigid extrusion providing a robust fixture
- Encapsulation available in clear or translucent
- Suitable for indoor and outdoor locations (IK10)
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish or clear end caps to achieve seamless appearance of long runs
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Used in applications where CCT and brightness need to be controlled separately
- When using DALI and DMX power supplies, LED wattage must be doubled
- Optional plastic louver accessory available in white or black for added glare control

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
PRODUCT	WATTS/FT	CCT	RATED	EFFICIENCY	LENS	WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	INPUT END CAP	OUTPUT END CAP	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/OPTIMAL
			ENC													

Sample Part Number: **TQ3DW-6.0-24/30-ENC-WO-TL-P1-BW-BW-STD-STD-BK-CL2-SST-BK-48"-E**

1

PRODUCT

TQ3DW

TQ3DW-USA

Select USA option for BAA and BABA projects.

LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.

2

WATTS/FT

1.5HE

1.5W/ft HE

2.5HE

2.5W/ft HE

3

CCT

24/30

2400K/3000K

27/40

2700K/4000K

4

RATED

ENC

IP67

5

EFFICIENCY

STD

Standard

WO

White Optics

WhiteOptics - Internal coating, greater lumen output

6

LENS

CL

Clear

TL

Translucent

For representation of LED visibility, see Diode Visibility section on following pages.

For beam angles, see Photometric Performance section on following pages

For optional snap-on louver ordering, see External Louver Accessory section on following pages

7

WIRE INPUT/OUTPUT

S1

Single 1 (Input only) - End Feed

S2

Single 2 (Input only) - Bottom Feed

S3

Single 3 (Input only) - Left Side Feed

S4

Single 4 (Input only) - Right Side Feed

P1

Pass Through 1 (Input/output) - End Feed

P2

Pass Through 2 (Input/output) - Bottom Feed

P3

Pass Through 3 (Input/output) - Left Side Feed

P4

Pass Through 4 (Input/output) - Right Side Feed

For continuous mounting, consider bottom or side feed

8

CONNECTOR/WIRE IN

BW

Bare Wire (Standard 24")

CON6

Connector 6"

CON24

Connector 24"

BW

Bare Wire (Standard 24")

CON6

Connector 6"

CON24

Connector 24"

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9

CONNECTOR/WIRE OUT

CLS

Closed End (No feed)

BW

Bare Wire (Standard 24")

CON6

Connector 6"

CON24

Connector 24"

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

10

INPUT END CAP

STD

Standard

CL

Clear

STD - End cap matches fixture finish chosen

Select CL for continuous runs

11

OUTPUT END CAP

STD

Standard

CL

Clear

STD - End cap matches fixture finish chosen

Select CL for continuous runs

12

WIRE COLOR

WH

White

BK

Black

13

WIRE TYPE

CL2

Class 2

CL2P

Plenum Rated

CL2P only available with bare wire leads (BW)

14

MOUNTING

SST

Stainless Steel

M4

Low Profile Magnet

MG

Magnet

15

FINISH

ST

Satin

BK

Black

BZ

Bronze

CU

Custom

Custom finishes require a longer lead time, consult factory

16

LENGTH (IN)

Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".

17

EXACT/OPTIMAL

O

Optimal Illumination

E

Exact Specified Length


Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.



ESSENTIALS TORQ-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

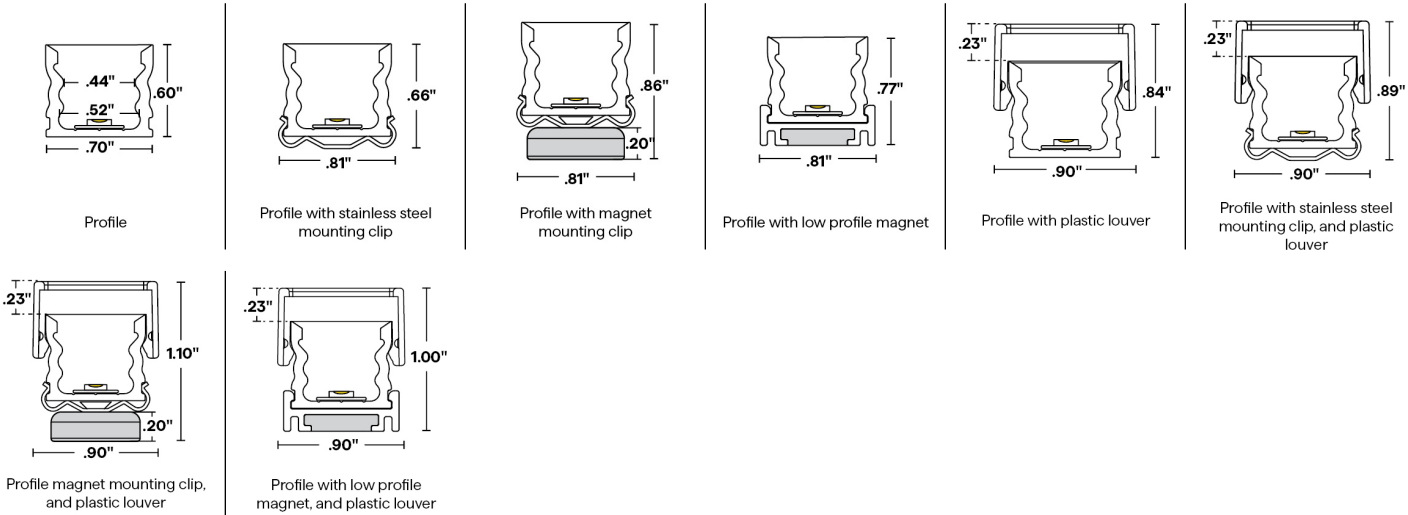

2 DELIVERED LUMENS


[Calculated L70 = 40000 hrs]
Tested with TQ3DW-**-30-ENC-STD

	1.5HE W/FT		2.5HE W/FT	
	LM/FT	CRI	LM/FT	CRI
CL	96	98	151	98
TL	80	98	127	98

[Calculated L70 = 40000 hrs]
Tested with TQ3DW-**-30-ENC-WO

	1.5HE W/FT		2.5HE W/FT	
	LM/FT	CRI	LM/FT	CRI
CL	103	98	163	98
TL	91	98	143	98

6 DIODE VISIBILITY

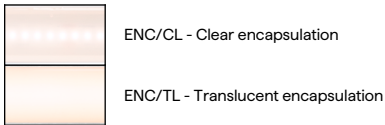

TEMPERATURE RATINGS

	DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT	
	QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
	Min	Max	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	105°F




ESSENTIALS TORQ-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

7 WIRE INPUT/OUTPUT


SINGLE (Input only)

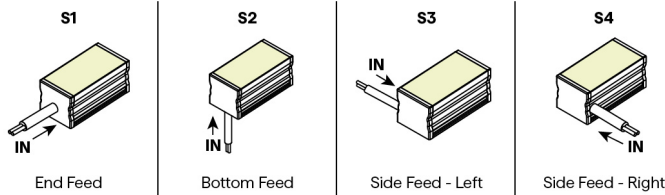

PASS THROUGH (Input/Output)

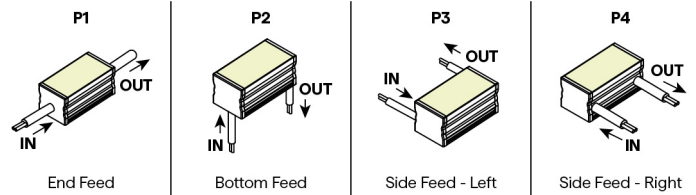


CONFIGURATION OPTIONS

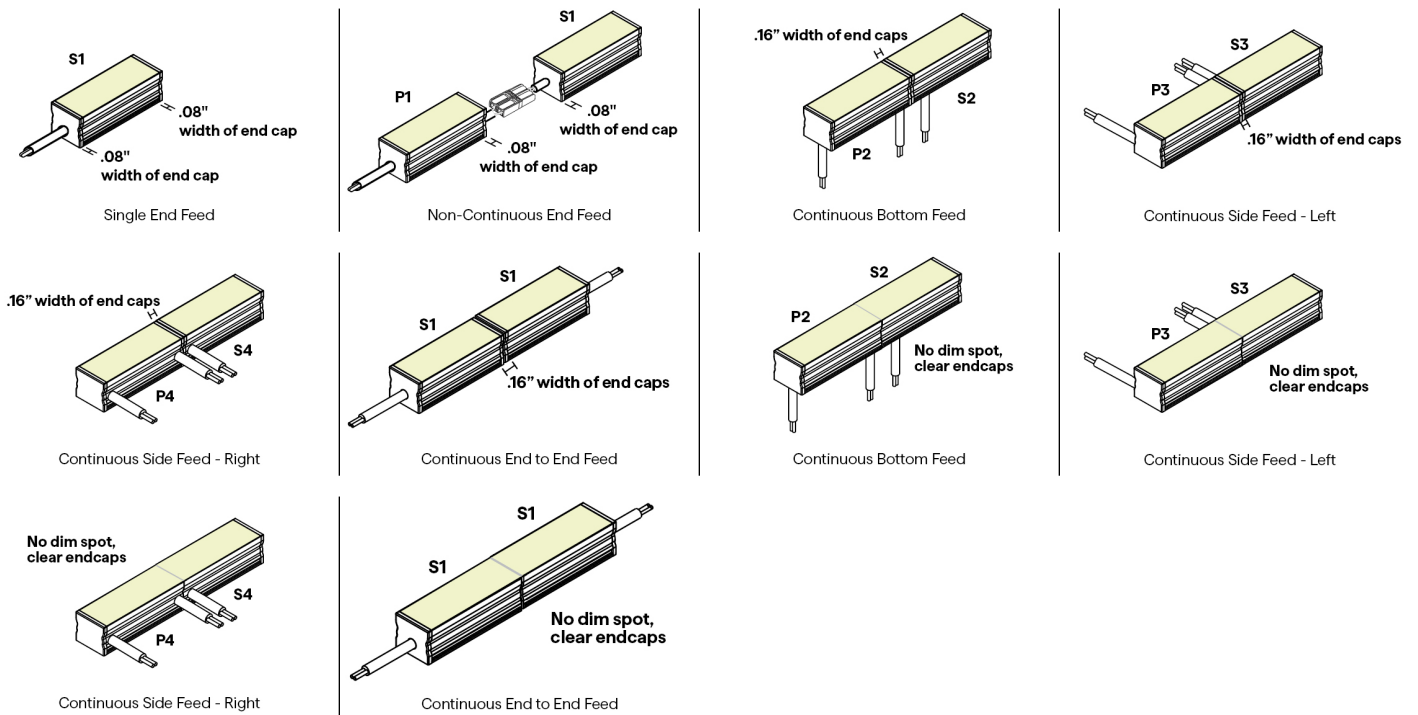


8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

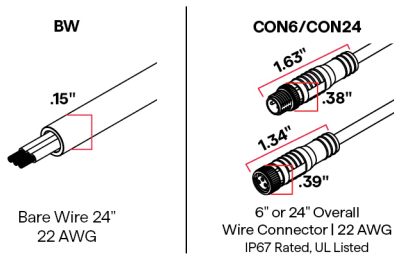

10 / 11 END CAP - IN/OUT

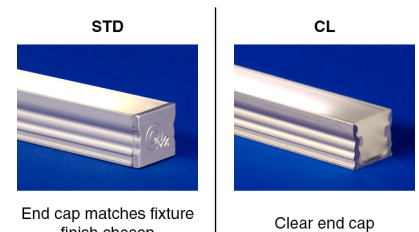




ESSENTIALS TORQ-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

EXTERNAL LOUVER ACCESSORY

PLASTIC

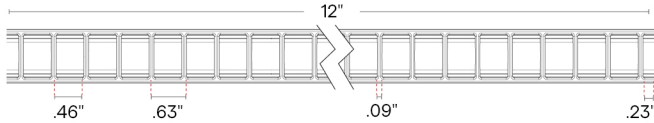


L1-XX



Lumen Multiplier

WH BK

0.70 0.49



Profile with plastic louver

To order separately use
TORQ-L1-FLAT-KIT-WH or
TORQ-L1-FLAT-KIT-BK

12 WIRE COLOR




White

Black

14 MOUNTING

SST




Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-01

Each clip comes with a #4 x 5/8" Flat Head screw

M4




Low Profile Magnet

One M4 provided per foot.

To order separately use
MG-04

MMA-04




Magnet Mount
Accessory for M4

Sold separately, to order use
MMA-04

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface

MG



Magnet Clip

One MG provided per foot

To order separately use MG-01

15 FINISH




Satin

Black

Bronze

Custom finishes require a longer lead time, consult factory

MMA-01



Magnet Mount
Accessory of MG-01

Sold separately, to order use
MMA-01

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface



ESSENTIALS TORQ-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

17 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

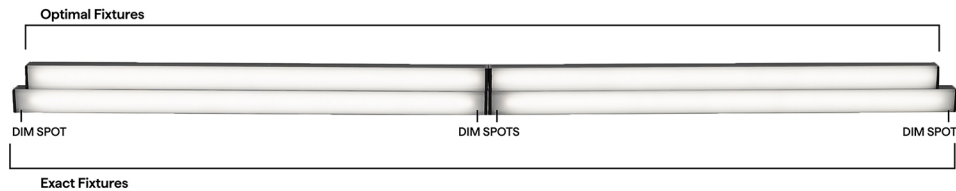

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED+TW-AWN QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+TW QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle	

DIMMING PROTOCOL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
0-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN	QOM-eLED+TW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN	
DMX LED wattage must be doubled for DW-HE products	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle	



ESSENTIALS TORQ-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M Adjustable mounting bracket - Medium	HINGE - HMB-L Adjustable mounting bracket - Large	HINGE - HMB-XL Adjustable mounting bracket - XLarge	Q-PIVOT Small mounting accessory	Q-ANGLE Adjustable mounting accessory	NJ-MEDIUM J Mounting Bracket	NJ-LARGE J Mounting Bracket	SD-J-LARGE J Mounting Bracket	NU-LARGE U Mounting Bracket	BL-LARGE Backwards L Mounting Bracket
NL-LARGE L Mounting Bracket	SD-L-LARGE L Mounting Bracket	MMA-01 Magnet Mount Accessory of MG-01	MMA-04 Magnet Mount Accessory of MG-04						

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5

UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE

Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP

Read and write DMX addresses and adjust voltage