





# ESSENTIALS LALO- ENCAPSULATED (03) RGBW

## 24VDC Linear Fixtures - Surface & Recessed



- Shallow, low-profile fixture for surface or recessed installations
- Features high quality LED strips encapsulated in polyurethane in a rigid extrusion providing a robust fixture
- Encapsulation available in clear or translucent
- Suitable for indoor and outdoor locations (IK10)
- Three mounting options
- Features painted end caps to match extrusion finish or clear end caps to achieve seamless appearance of long runs
- Red, Green, and Blue LED paired with a specifiable white LED allow for color changing applications
- 21 diodes per 2" outpoint allowing for minimal diode visibility
- Optional plastic louver accessory available in white or black for added glare control

### INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	EFFICIENCY	LENS
LL3RGBW			ENC	STD	

### ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15	16	17
WIRE INPUT/ OUTPUT	CONNECTOR / WIRE IN	CONNECTOR / WIRE OUT	INPUT END CAP	OUTPUT END CAP	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: LL3RGBW-4.OHE-30-ENC-STD-TL-P1-BW-STD-STD-BK-CL2-SST-48"-E


<b>1 PRODUCT</b> LL3RGBW See following pages for compatible power supplies.	<b>2 WATTS/FT</b> 6.0 6.0W/ft 4.OHE 4.0W/ft HE	<b>3 CCT</b> 27 RGBW-2700K 30 RGBW-3000K 27 RGBW-2700K 30 RGBW-3000K 35 RGBW-3500K 40 RGBW-4000K	<b>4 RATED</b> ENC IP67	<b>5 EFFICIENCY</b> STD Standard	<b>6 LENS</b> CL Clear TL Translucent For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. For optional snap-on louver ordering, see External Louver Accessory section on following pages	
<b>7 WIRE INPUT/OUTPUT</b> SINGLE (Input only) S1 End Feed S2 Bottom Feed PASS THROUGH (Input/output) P1 End Feed P2 Bottom Feed For continuous mounting, consider bottom feed	<b>8 CONNECTOR/WIRE IN</b> BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>9 CONNECTOR/WIRE OUT</b> CLS Closed End (No feed) BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>10 INPUT END CAP</b> STD Standard CL Clear STD - End cap matches fixture finish chosen Select CL for continuous runs	<b>11 OUTPUT END CAP</b> STD Standard CL Clear STD - End cap matches fixture finish chosen Select CL for continuous runs	<b>12 WIRE COLOR</b> WH White BK Black	<b>13 WIRE TYPE</b> CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)
<b>14 MOUNTING</b> SST Stainless Steel M4 Low Profile Magnet MG Magnet	<b>15 FINISH</b> ST Satin BK Black CU Custom Custom finishes require a longer lead time, consult factory	<b>16 LENGTH (IN)</b> Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>17 EXACT/OPTIMAL</b> O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.			



# ESSENTIALS LALO-ENCAPSULATED (03) RGBW

## 24VDC Linear Fixtures - Surface & Recessed

### 1 PRODUCT - DIMENSIONS

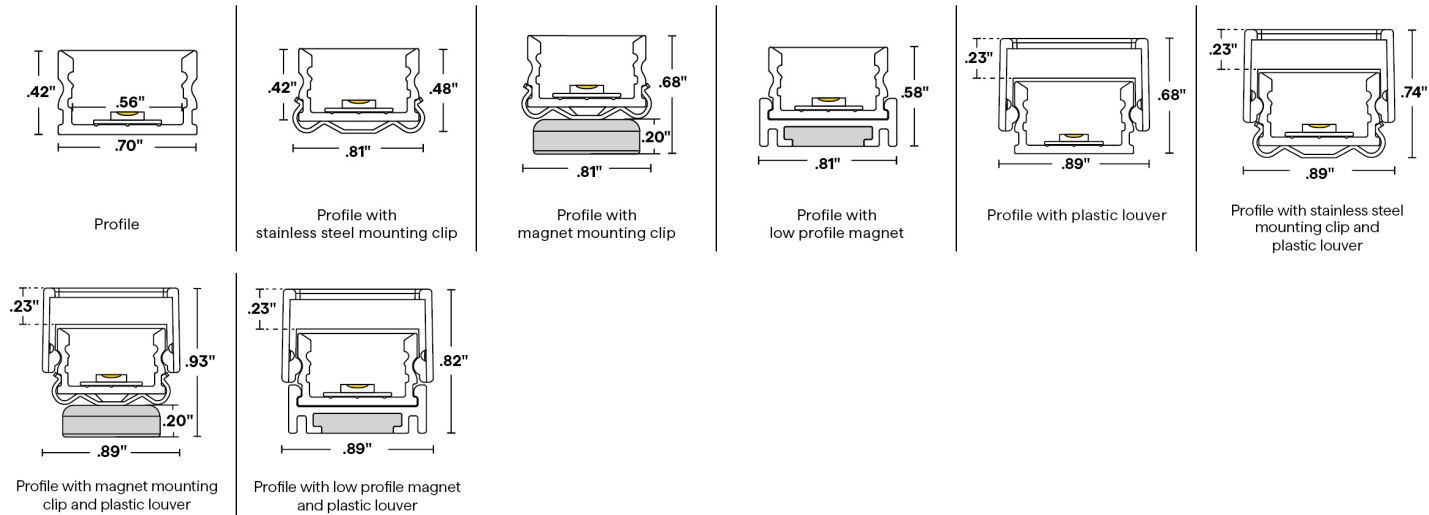


### 2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]  
Tested with LL3RGBW-\*\*-30-ENC-STD

	6.0 W/FT								4.0HE W/FT							
	Red		Green		Blue		3000K		Red		Green		Blue		3000K	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	CRI	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	CRI
CL	27	631	73	513	22	464	93	93	24	629	90	516	19	465	55	97
TL	15	631	41	513	12	464	53	93	13	629	51	516	11	465	32	97

### 6 DIODE VISIBILITY

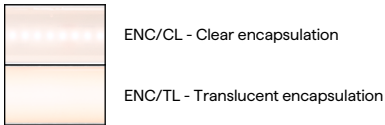

### TEMPERATURE RATINGS

	6.0 W/FT		4.0 HE W/FT	
	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	100°F	-4°F	110°F




# ESSENTIALS LALO-ENCAPSULATED (03) RGBW


24VDC Linear Fixtures - Surface & Recessed

## 7 WIRE INPUT/OUTPUT


SINGLE (Input only)

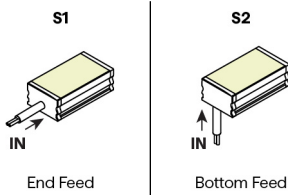

PASS THROUGH (Input/Output)

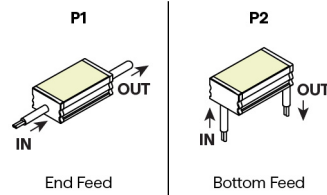


## CONFIGURATION OPTIONS

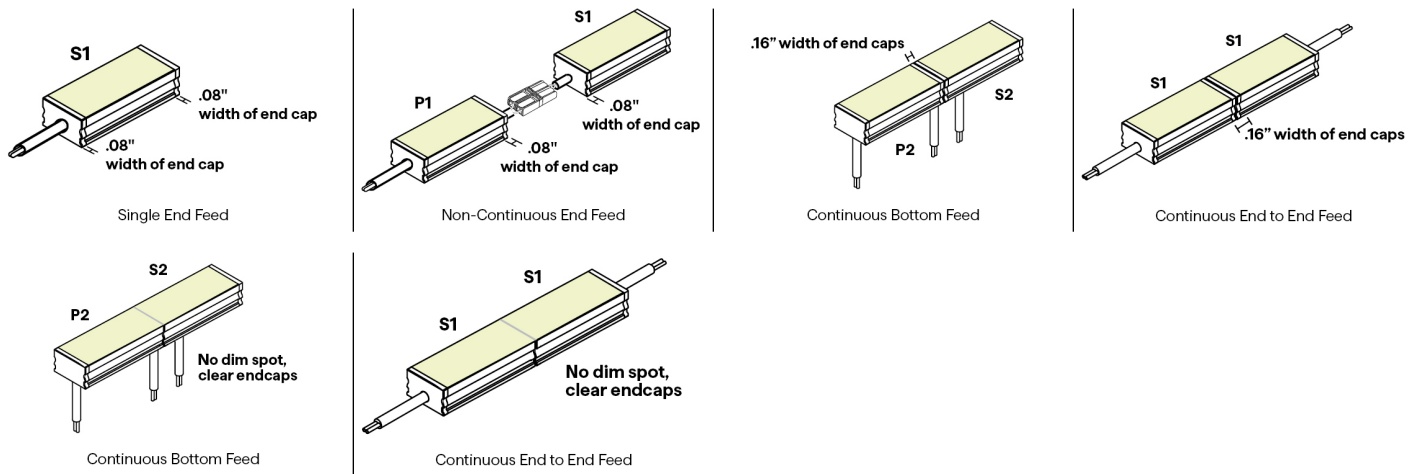


## 8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

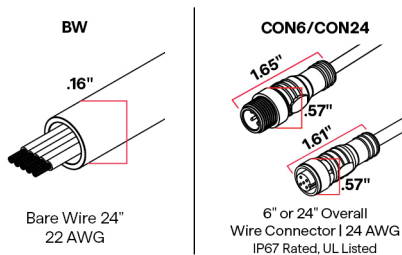

## 10 / 11 END CAP - IN/OUT

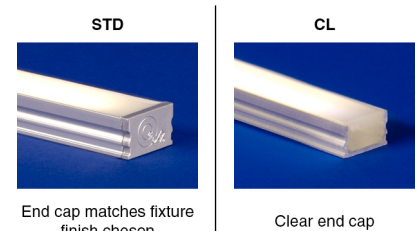



# ESSENTIALS LALO-ENCAPSULATED (03) RGBW


24VDC Linear Fixtures - Surface & Recessed

## EXTERNAL LOUVER ACCESSORY

### PLASTIC



L1-XX




Lumen Multiplier

WH

BK

0.71

0.48



Profile with plastic louver

To order separately use  
LALO-L1-FLAT-KIT-WH or  
LALO-L1-FLAT-KIT-BK

### 12 WIRE COLOR




White

Black

### 14 MOUNTING

SST




Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-01

Each clip comes with a #4 x 5/8" Flat Head screw

M4




Low Profile Magnet

One M4 provided per foot.

To order separately use  
MG-04

MMA-04




Magnet Mount  
Accessory for M4

Sold separately, to order use  
MMA-04

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface

MG




Magnet Clip

One MG provided per foot

To order separately use MG-01

### 15 FINISH




Satin

Black

Custom finishes  
require a longer lead  
time, consult factory

MMA-01



Magnet Mount  
Accessory of MG-01

Sold separately, to order use  
MMA-01

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface



# ESSENTIALS LALO-ENCAPSULATED (03) RGBW

## 24VDC Linear Fixtures - Surface & Recessed

17

EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →

E/O Explained →

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.



### RGB ENC LENGTHS BY INCH

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	S1
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

#### POTENTIAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
12"	10.51"		10.86"	
13"	12.51"		12.86"	
14"	12.51"		12.86"	
15"	14.51"		14.86"	
16"	14.51"		14.86"	
17"	16.51"		16.86"	
18"	16.51"		16.86"	
19"	18.51"		18.86"	
20"	18.51"		18.86"	
21"	20.51"		20.86"	
22"	20.51"		20.86"	
23"	22.51"		22.86"	
24"	22.51"		22.86"	
36"	34.51"		34.86"	
48"	46.51"		46.86"	
60"	58.51"		58.86"	
72"	70.51"		70.86"	
84"	82.51"		82.86"	
96"	94.51"		94.86"	




# ESSENTIALS LALO-ENCAPSULATED (03) RGBW



24VDC Linear Fixtures - Surface & Recessed

## RGBW ENC LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	2"
13"	0.5"
14"	1"
15"	1.5"
16"	2"
17"	0.5"
18"	1"
19"	1.5"
20"	2"
21"	0.5"
22"	1"
23"	1.5"
24"	2"
36"	2"
48"	2"
60"	2"
72"	2"
84"	2"
96"	2"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2	P1 & P2
		
12"	8.51"	8.86"
13"	12.51"	12.86"
14"	12.51"	12.86"
15"	12.51"	12.86"
16"	12.51"	12.86"
17"	16.51"	16.86"
18"	16.51"	16.86"
19"	16.51"	16.86"
20"	16.51"	16.86"
21"	20.51"	20.86"
22"	20.51"	20.86"
23"	20.51"	20.86"
24"	20.51"	20.86"
36"	32.51"	32.86"
48"	44.51"	44.86"
60"	56.51"	56.86"
72"	68.51"	68.86"
84"	80.51"	80.86"
96"	92.51"	92.86"

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	RGBW, RGBW-HE	RGBW, RGBW-HE
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DMX QOM-eLED+PS-DALI-DT8 QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with RGBW App Dongle	










DIMMING PROTOCOL	INDOOR	OUTDOOR
	RGBW, RGBW-HE	RGBW, RGBW-HE
DMX	QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with RGBW App Dongle	




# ESSENTIALS LALO-ENCAPSULATED (03) RGBW

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-M</b>	<b>HINGE - HMB-L</b>	<b>HINGE - HMB-XL</b>	<b>Q-PIVOT</b>	<b>Q-ANGLE</b>	<b>QUOVA-STANDARD</b>	<b>SD-L-MEDIUM</b>	<b>MMA-01</b>	<b>MMA-04</b>
								
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	QUOVA Knife Edge	L Mounting Bracket	Magnet Mount Accessory of MG-01	Magnet Mount Accessory of MG-04

## COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

## COMPATIBLE CONTROL ACCESSORIES

### SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

## COMPATIBLE APPS



Read and write DMX addresses and adjust voltage