





# ESSENTIALS TORQ- ENCAPSULATED (03) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed



- Surface mount linear fixture
- Features high quality LED strips encapsulated in polyurethane in a rigid extrusion providing a robust fixture
- Encapsulation available in clear or translucent
- Suitable for indoor and outdoor locations (IK10)
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish or clear end caps to achieve seamless appearance of long runs
- Red, Green, Blue or Amber LEDs available
- QTL Red & Amber LED products are Florida Fish and Wildlife Conservation Commission certified, making them safe for turtles and other wildlife
- Optional plastic louver accessory available in white or black for added glare control

## INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/FT	CCT	RATED	EFFICIENCY	LENS
TQ3SC	5.0		ENC		

## ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15	16	17
WIRE INPUT/ OUTPUT	CONNECTOR / WIRE IN	CONNECTOR / WIRE OUT	INPUT END CAP	OUTPUT END CAP	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **TQ3SC-5.0-G-ENC-WO-TL-P1-BW-BW-STD-STD-BK-CL2-SST-ST-48"-E**


<b>1</b> <b>PRODUCT</b> <b>TQ3SC</b> See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b> <b>5.0</b> 5.0W/ft	<b>3</b> <b>CCT</b> <b>A</b> Amber <b>B</b> Blue <b>G</b> Green <b>R</b> Red	<b>4</b> <b>RATED</b> <b>ENC</b> IP67	<b>5</b> <b>EFFICIENCY</b> <b>STD</b> Standard <b>WO</b> White Optics WhiteOptics - Internal coating, greater lumen output	<b>6</b> <b>LENS</b> <b>CL</b> Clear <b>TL</b> Translucent For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages For optional snap-on louver ordering, see External Louver Accessory section on following pages
<b>7</b> <b>WIRE INPUT/OUTPUT</b> <b>SINGLE (Input only)</b> <b>S1</b> End Feed <b>S2</b> Bottom Feed <b>S3</b> Left Side Feed <b>S4</b> Right Side Feed  <b>PASS THROUGH (Input/output)</b> <b>P1</b> End Feed <b>P2</b> Bottom Feed <b>P3</b> Left Side Feed <b>P4</b> Right Side Feed	<b>8</b> <b>CONNECTOR/WIRE IN</b> <b>BW</b> Bare Wire (Standard 24") <b>BRL</b> Barrel <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  <b>BW</b> Bare Wire (Standard 24") <b>BRL</b> Barrel <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"	<b>9</b> <b>CONNECTOR/WIRE OUT</b> <b>CLS</b> Closed End (No feed)  <b>BW</b> Bare Wire (Standard 24") <b>BRL</b> Barrel <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"			
<b>10</b> <b>INPUT END CAP</b> <b>STD</b> Standard <b>CL</b> Clear STD - End cap matches fixture finish chosen Select CL for continuous runs	<b>11</b> <b>OUTPUT END CAP</b> <b>STD</b> Standard <b>CL</b> Clear STD - End cap matches fixture finish chosen Select CL for continuous runs	<b>12</b> <b>WIRE COLOR</b> <b>WH</b> White <b>BK</b> Black <b>N/A</b> For Barrel	<b>13</b> <b>WIRE TYPE</b> <b>CL2</b> Class 2 <b>CL2P</b> Plenum Rated <b>N/A</b> For Barrel CL2P only available with bare wire leads (BW)		
<b>14</b> <b>MOUNTING</b> <b>SST</b> Stainless Steel <b>M4</b> Low Profile Magnet <b>MG</b> Magnet	<b>15</b> <b>FINISH</b> <b>ST</b> Satin <b>BK</b> Black <b>BZ</b> Bronze <b>CU</b> Custom Custom finishes require a longer lead time, consult factory	<b>16</b> <b>LENGTH (IN)</b> Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>17</b> <b>EXACT/OPTIMAL</b> <b>O</b> Optimal Illumination <b>E</b> Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.		



# ESSENTIALS TORQ-ENCAPSULATED (03) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS

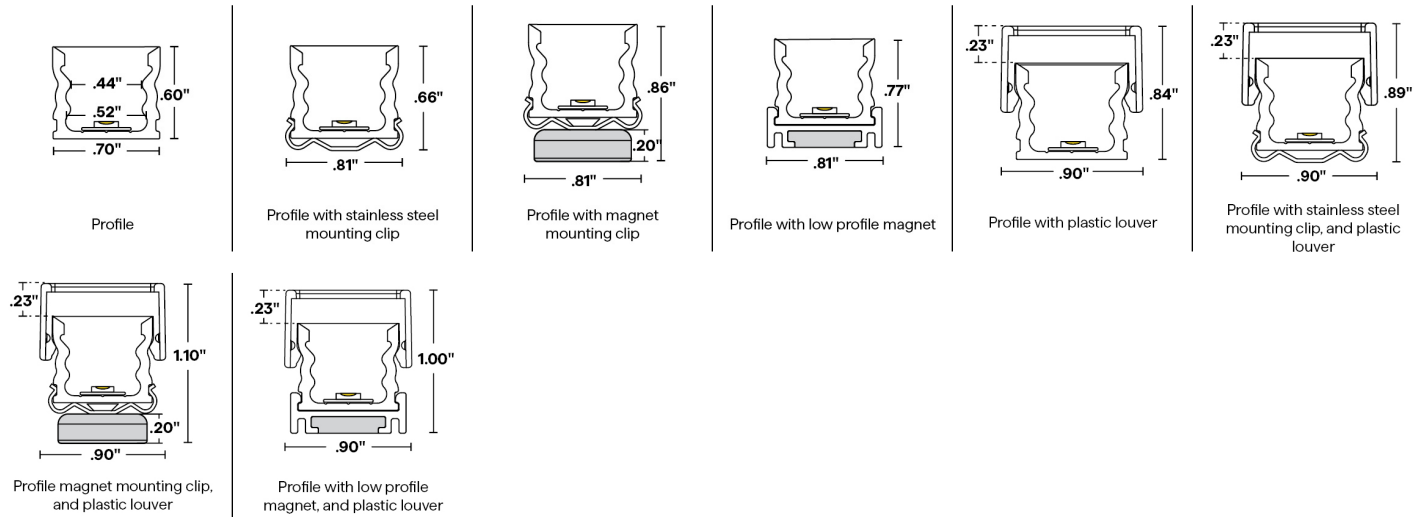

## 2 DELIVERED LUMENS


[Calculated L70 = 40000 hrs]  
Tested with TQ3SC-5.0-\*\*-ENC-STD

	Red		Green		Blue		Amber	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH
CL	56	633	302	517	78	466	51	597
TL	47	633	254	517	66	466	42	597

[Calculated L70 = 40000 hrs]  
Tested with TQ3SC-5.0-\*\*-ENC-WO

	Red		Green		Blue		Amber	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH
CL	60	633	327	517	85	466	55	597
TL	53	633	287	517	74	466	48	597

## 6 DIODE VISIBILITY

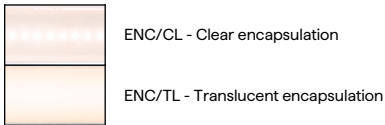

## TEMPERATURE RATINGS

	5.0 W/FT	
	Min	Max
Ambient Operating Temp - Surface	-4°F	110°F




# ESSENTIALS TORQ-ENCAPSULATED (03) STATIC COLOR


24VDC Linear Fixtures - Surface & Recessed

## 7 WIRE INPUT/OUTPUT


SINGLE (Input only)

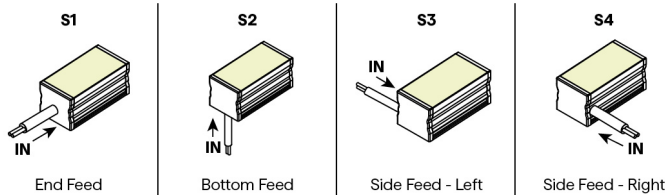

PASS THROUGH (Input/Output)

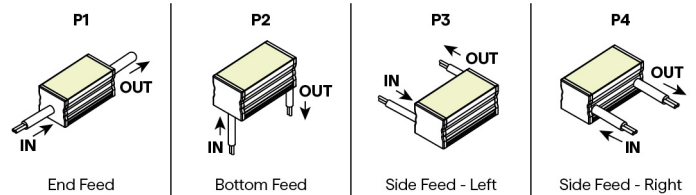


## CONFIGURATION OPTIONS

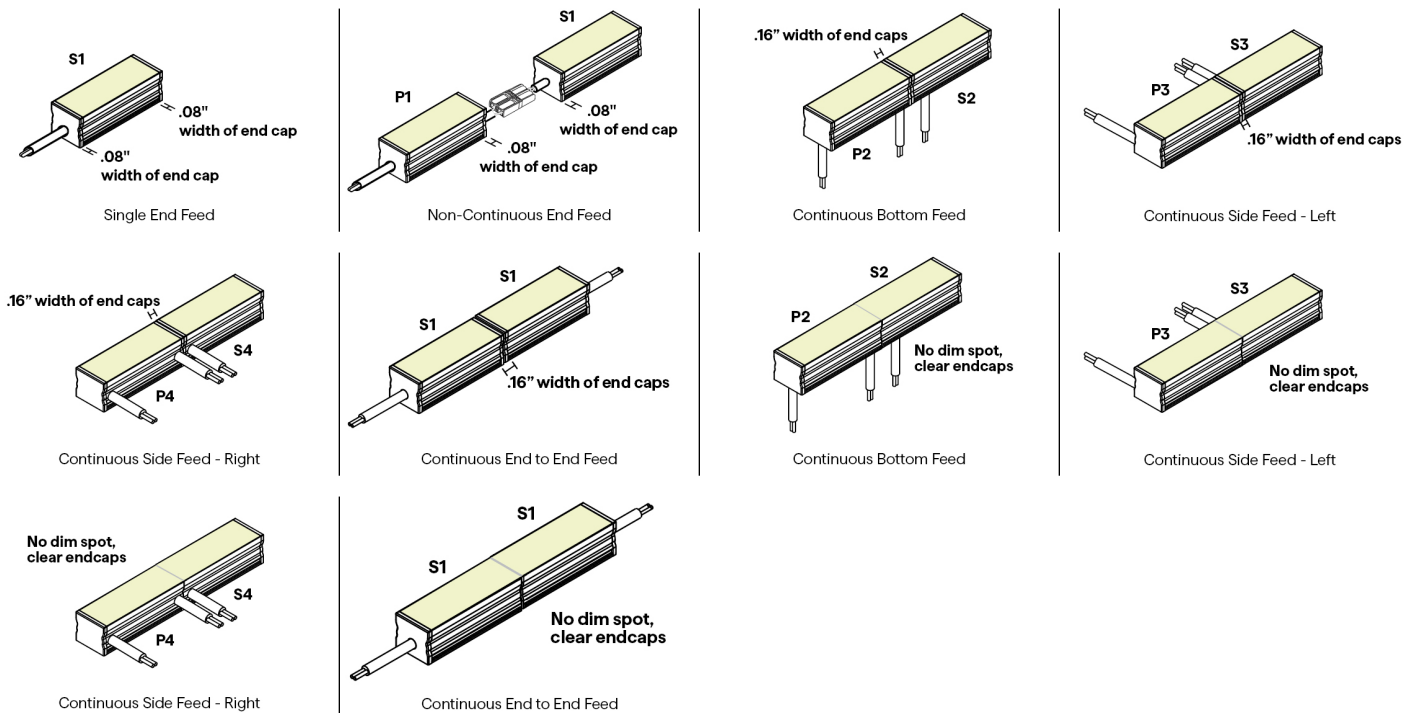


## 8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

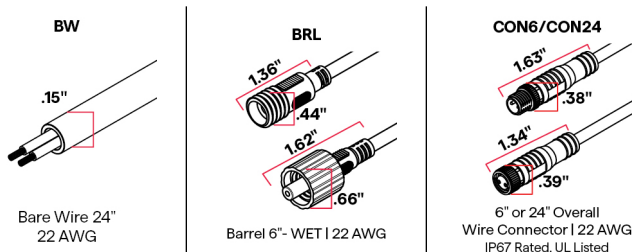

## 10 / 11 END CAP - IN/OUT

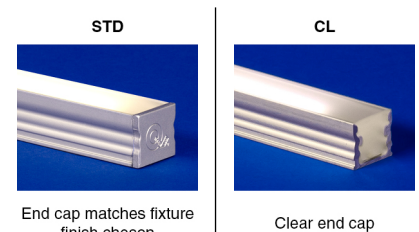




# ESSENTIALS TORQ-ENCAPSULATED (03) STATIC COLOR


24VDC Linear Fixtures - Surface & Recessed

## EXTERNAL LOUVER ACCESSORY

### PLASTIC

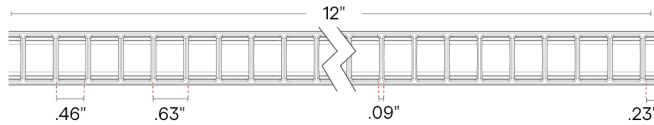


L1-XX



Lumen Multiplier

WH BK


0.70 0.49



Profile with plastic louver

To order separately use  
TORQ-L1-FLAT-KIT-WH or  
TORQ-L1-FLAT-KIT-BK

## 12 WIRE COLOR




White

Black

## 14 MOUNTING

SST




Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-01

Each clip comes with a #4 x 5/8" Flat Head screw

M4




Low Profile Magnet

One M4 provided per foot.

To order separately use  
MG-04

MMA-04




Magnet Mount  
Accessory for M4

Sold separately, to order use  
MMA-04

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface

MG



Magnet Clip

One MG provided per foot

To order separately use MG-01

## 15 FINISH




Satin

Black

Bronze

Custom finishes require a longer lead time, consult factory

MMA-01



Magnet Mount  
Accessory of MG-01

Sold separately, to order use  
MMA-01

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface



# ESSENTIALS TORQ-ENCAPSULATED (03) STATIC COLOR

## 24VDC Linear Fixtures - Surface & Recessed

17

EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →

E/O Explained →

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.



### SC ENC LENGTHS BY INCH

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	S1
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

#### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1	S2	P1	P2	S3	S4	P3	P4
12"	10.41"		10.66"		10.26"		10.36"	
13"	12.41"		12.66"		12.26"		12.36"	
14"	12.41"		12.66"		12.26"		12.36"	
15"	14.41"		14.66"		14.26"		14.36"	
16"	14.41"		14.66"		14.26"		14.36"	
17"	16.41"		16.66"		16.26"		16.36"	
18"	16.41"		16.66"		16.26"		16.36"	
19"	18.41"		18.66"		18.26"		18.36"	
20"	18.41"		18.66"		18.26"		18.36"	
21"	20.41"		20.66"		20.26"		20.36"	
22"	20.41"		20.66"		20.26"		20.36"	
23"	22.41"		22.66"		22.26"		22.36"	
24"	22.41"		22.66"		22.26"		22.36"	
36"	34.41"		34.66"		34.26"		34.36"	
48"	46.41"		46.66"		46.26"		46.36"	
60"	58.41"		58.66"		58.26"		58.36"	
72"	70.41"		70.66"		70.26"		70.36"	
84"	82.41"		82.66"		82.26"		82.36"	
96"	94.41"		94.66"		94.26"		94.36"	



ESSENTIALS TORQ-ENCAPSULATED (03) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	SC	SC
Dim to Black	Q6M-DC+CAP QTM-DC+CAP IQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	

















# ESSENTIALS TORQ-ENCAPSULATED (03) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR	OUTDOOR
	SC	SC
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

## COMPATIBLE MOUNTING ACCESSORIES







<b>HINGE - HMB-M</b>  1.41" .71" Adjustable mounting bracket - Medium	<b>HINGE - HMB-L</b>  1.46" 1.29" Adjustable mounting bracket - Large	<b>HINGE - HMB-XL</b>  1.46" 4" Adjustable mounting bracket - XLarge	<b>Q-PIVOT</b>  .75" 1.03" Small mounting accessory	<b>Q-ANGLE</b>  2.23" 1.38" Adjustable mounting accessory	<b>NJ-MEDIUM</b>  J Mounting Bracket	<b>NJ-LARGE</b>  J Mounting Bracket	<b>SD-J-LARGE</b>  J Mounting Bracket	<b>NU-LARGE</b>  U Mounting Bracket	<b>BL-LARGE</b>  Backwards L Mounting Bracket
<b>NL-LARGE</b>  L Mounting Bracket	<b>SD-L-LARGE</b>  L Mounting Bracket	<b>MMA-01</b>  1.23" .75" Magnet Mount Accessory of MG-01	<b>MMA-04</b>  1.19" .93" Magnet Mount Accessory of MG-04						



# ESSENTIALS TORQ-ENCAPSULATED (03) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE WIRING ACCESSORIES

<b>Q-mini-J</b>  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	<b>Q-mini-J5</b>  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	<b>BARREL-EXT</b>  8ft barrel cable extender DRY ONLY	<b>BARREL FOUR-FER</b>  Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	<b>CON120-EXT</b>  10ft Con cable extender DRY/DMP/WET	<b>CON FOUR-FER</b>  Splits lead from one to four LED Con connectors DRY/DMP/WET
--	---	---	--	--	--

## COMPATIBLE APPS

**NFC APP**  
  
Read and write DMX addresses and adjust voltage