





MICRO 5 ATOM-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS



Profile with flat lens




Profile with flat lens and stainless steel mounting clip

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with ATOM-01-SW-**-30-DRY

| | 1.0 W/FT | | 2.0 W/FT | | 4.0 W/FT | |
|----|----------|-----|----------|-----|----------|-----|
| | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI |
| FR | 74 | 97 | 148 | 98 | 297 | 98 |
| DF | 44 | 98 | 84 | 98 | 164 | 98 |

5 DIODE VISIBILITY




DF - Diffused lens

FR - Frosted lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



DF lens at 3000K



MICRO 5 ATOM-FLAT (01) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS


| | | 1.0 W/FT | | 2.0 W/FT | | 4.0 W/FT | |
|-----|----------------------------------|----------|-------|----------|-------|----------|-------|
| | | Min | Max | Min | Max | Min | Max |
| DRY | Ambient Operating Temp - Surface | -4°F | 145°F | -4°F | 140°F | -4°F | 120°F |
| DMP | Ambient Operating Temp - Surface | -4°F | 140°F | -4°F | 135°F | -4°F | 115°F |

6 WIRE INPUT/OUTPUT


SINGLE (Input only)

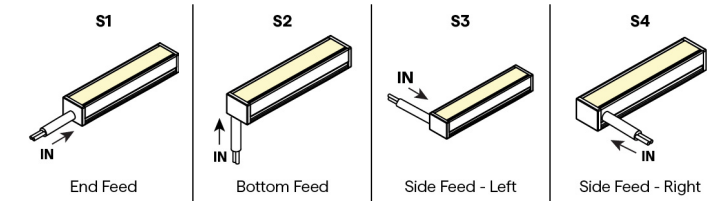

PASS THROUGH (Input/Output)

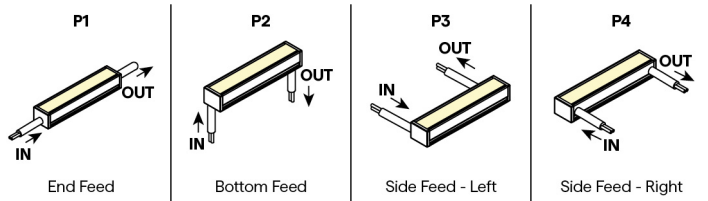


CONFIGURATION OPTIONS

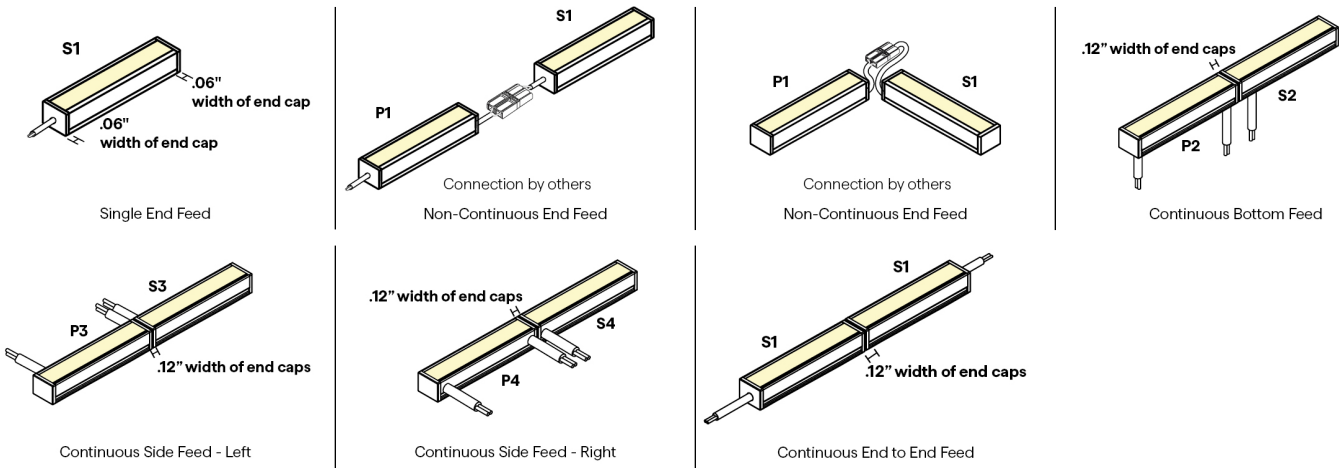

7 / 8 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out

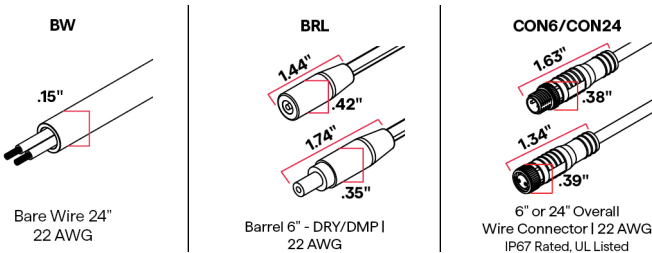

9 WIRE COLOR






MICRO 5 ATOM-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

11 MOUNTING

SST



Stainless Steel Clip

2 pieces of hardware provided for 4' or less; 4 pieces provided for greater than 4'

To order separately use SST-08

Each clip comes with a #4 x 5/8" Flat Head SS

12 FINISH



Satin

Black


Custom finishes require a longer lead time, consult factory

15 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

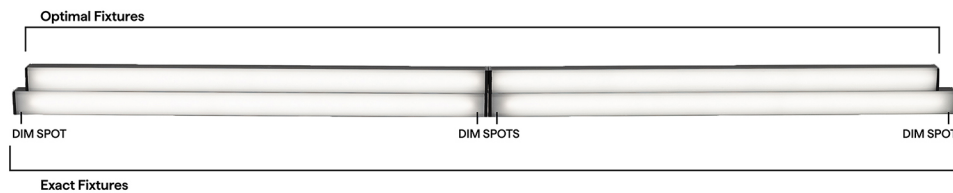



MICRO 5 ATOM-FLAT (01) STATIC WHITE









24VDC Linear Fixtures - Surface & Recessed

SW DRY DMP LENGTHS BY INCH

EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture |
|------------------|---|
| |  |
| 12" | 0.5" |
| 13" | 0.5" |
| 14" | 0.5" |
| 15" | 0.5" |
| 16" | 0.5" |
| 17" | 0.5" |
| 18" | 0.5" |
| 19" | 0.5" |
| 20" | 0.5" |
| 21" | 0.5" |
| 22" | 0.5" |
| 23" | 0.5" |
| 24" | 0.5" |
| 36" | 0.5" |
| 48" | 0.5" |
| 60" | 0.5" |
| 72" | 0.5" |
| 84" | 0.5" |
| 96" | 0.5" |

OPTIMAL LENGTH

| Requested Nominal Length | S1 & S2 & S3 & S4 | | | | P1 & P2 & P3 & P4 | | | |
|--------------------------|---|---|---|--|---|---|---|---|
| |  |  |  |  |  |  |  |  |
| 12" | | | 11.38" | | | | 11.63" | |
| 13" | | | 12.38" | | | | 12.63" | |
| 14" | | | 13.38" | | | | 13.63" | |
| 15" | | | 14.38" | | | | 14.63" | |
| 16" | | | 15.38" | | | | 15.63" | |
| 17" | | | 16.38" | | | | 16.63" | |
| 18" | | | 17.38" | | | | 17.63" | |
| 19" | | | 18.38" | | | | 18.63" | |
| 20" | | | 19.38" | | | | 19.63" | |
| 21" | | | 20.38" | | | | 20.63" | |
| 22" | | | 21.38" | | | | 21.63" | |
| 23" | | | 22.38" | | | | 22.63" | |
| 24" | | | 23.38" | | | | 23.63" | |
| 36" | | | 35.38" | | | | 35.63" | |
| 48" | | | 47.38" | | | | 47.63" | |
| 60" | | | 59.38" | | | | 59.63" | |
| 72" | | | 71.38" | | | | 71.63" | |
| 84" | | | 83.38" | | | | 83.63" | |
| 96" | | | 95.38" | | | | 95.63" | |

14

EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →

E/O Explained →

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.





MICRO 5 ATOM-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIM TO LEVEL | INDOOR |
|--------------|--|
| | MICRO 5-SW |
| Dim to Black | Q6M-DC+CAP QTM-DC+CAP IQ-PH+QD1 |
| 0.1% | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP |
| 1% | QTM-eLED(E) QZ-DALI-DT6 |
| 10% | Non-Dim Power Supply with SW App Dongle |








| DIMMING PROTOCOL | INDOOR |
|------------------|--|
| | MICRO 5-SW |
| Non-Dim | QT-CAB-eLED-ND QTM-eLED-ND QZ-ND |
| Phase | Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP IQ-PH+QD1 |
| 0-10V | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP |
| Lutron Athena | QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN |
| ECO System | QTM-eLED(E) |
| DMX | QZ-DMX |
| DALI-2: DT6 | QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6 |
| SCENE App Dimmed | Non-Dim Power Supply with SW App Dongle |











MICRO 5 ATOM-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE MOUNTING ACCESSORIES

| | | | | | | |
|---|---|---|---|---|---|--|
| HINGE - HMB-S | QUOVA-MICRO | VHB | NJ-MICRO | BL-MICRO | NL-MICRO | SD-L-MICRO |
|  |  |  |  |  |  |  |
| Adjustable mounting bracket - Small | QUOVA Knife Edge | Double sided mounting tape | J Mounting Bracket | Backwards L Mounting Bracket | L Mounting Bracket | L Mounting Bracket |

COMPATIBLE WIRING ACCESSORIES

| | | | | | | | |
|---|---|---|---|---|---|--|---|
| Q-mini-J | Q-mini-J5 | QUOVA-MICRO | BARREL-EXT | BARREL FOUR-FER | CON120-EXT | CON FOUR-FER | CON M - BARREL F |
|  |  |  |  |  |  |  |  |
| UL Listed, miniature junction box, DRY/DMP (WET rated with silicone) | UL Listed, miniature junction box, DRY/DMP (WET rated with silicone) | QUOVA Knife Edge | 8ft barrel cable extender DRY ONLY | Splits lead from one to four LED Barrel connector fixtures, DRY/DMP | 10ft Con cable extender DRY/DMP/WET | Splits lead from one to four LED Con connectors DRY/DMP/WET | Male con to barrel cable adaptor DRY/DMP |

COMPATIBLE CONTROL ACCESSORIES

| |
|--|
| SCENE APP DONGLE |
|  |
| Wi-Fi or Bluetooth Connectivity |

COMPATIBLE APPS

| |
|---|
| NFC APP |
|  |
| Read and write DMX addresses and adjust voltage |