



MICRO 5 SLITE-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Recessed





410.2 & 410.16
Closet Rated
in 1.0-2.0W/ft



BUY AMERICAN
ACT COMPLIANT



BUILD AMERICA
BUY AMERICA
COMPLIANT



- MICRO 5 Series linear LED fixture designed to provide superior light performance and uniformity with discreet integration into drywall
- Two-piece mud-in fixture
- Suitable for indoor and outdoor locations
- 48% smaller than QTL's standard size extrusion (MDIN)
- Delivers equivalent efficacy as standard size fixtures
- Once installed, its wings are covered with tape and compound to create a seamless look
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 2.0 watts or less per foot per NEC regulations

1	2	3	4	5	6	7	8	9	10	11	12	13	14
PRODUCT	WATTS/FT	CCT	RATED	LENS	WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL
			ENC							SC			

Sample Part Number: **SLITE-03-SW-4.0-30-ENC-TL-S1-BW-CLS-WH-CL2-SC-ST-48"-E**

<div>1</div> <div>PRODUCT</div> <div>SLITE-03-SW SLITE-03-SW-USA</div> <div>Select USA option for BAA and BABA projects.</div> <div>See following pages for compatible power supplies.</div>	<div>2</div> <div>WATTS/FT</div> <div>1.01.0W/ft 2.02.0W/ft 4.04.0W/ft</div>	<div>3</div> <div>CCT</div> <div>242400K 272700K 303000K 353500K 404000K</div>	<div>4</div> <div>RATED</div> <div>ENCIP67</div>	<div>5</div> <div>LENS</div> <div>CLClear TLTranslucent</div> <div>For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages</div>	
<div>6</div> <div>WIRE INPUT/OUTPUT</div> <div>S1Single 1 (Input only) - End Feed S2Single 2 (Input only) - Bottom Feed</div> <div>For continuous mounting, consider bottom feed.</div> <div>P1Pass Through 1 (Input/output) - End Feed P2Pass Through 2 (Input/output) - Bottom Feed</div> <div>For continuous mounting, consider bottom feed.</div>	<div>7</div> <div>CONNECTOR/WIRE IN</div> <div>BWBare Wire (Standard 24") BRLBarrel CON6Connector 6" CON24Connector 24"</div> <div>BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div> <div>BWBare Wire (Standard 24") BRLBarrel CON6Connector 6" CON24Connector 24"</div> <div>BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div>	<div>8</div> <div>CONNECTOR/WIRE OUT</div> <div>CLSClosed End (No feed)</div> <div>BWBare Wire (Standard 24") BRLBarrel CON6Connector 6" CON24Connector 24"</div> <div>BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div>			
<div>9</div> <div>WIRE COLOR</div> <div>WHWhite BKBlack N/AFor Barrel</div>	<div>10</div> <div>WIRE TYPE</div> <div>CL2Class 2 CL2PPlenum Rated N/AFor Barrel</div> <div>CL2P only available with bare wire leads (BW)</div>	<div>11</div> <div>MOUNTING</div> <div>SCScrew</div>	<div>12</div> <div>FINISH</div> <div>STSatin CUCustom</div> <div>Custom finishes require a longer lead time, consult factory</div>	<div>13</div> <div>LENGTH (IN)</div> <div>Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".</div>	<div>14</div> <div>EXACT/OPTIMAL</div> <div>EExact specified length OOptimal illumination</div>


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



MICRO 5 SLITE-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Recessed

1 PRODUCT - DIMENSIONS

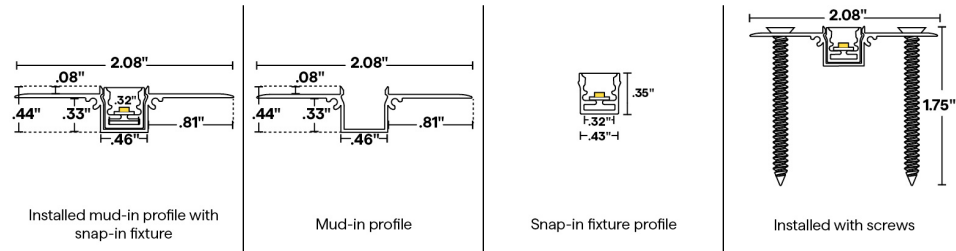


2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with SLITE-03-SW-**-30-ENC


	1.0 W/FT		2.0 W/FT		4.0 W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
CL	31	98	84	98	185	98
TL	23	98	61	98	137	98

5 DIODE VISIBILITY

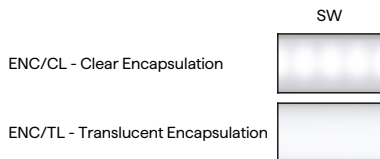

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.





MICRO 5 SLITE-ENCAPSULATED (03) STATIC WHITE


24VDC Linear Fixtures - Recessed

TEMPERATURE RATINGS


	1.0 W/FT		2.0 W/FT		4.0 W/FT	
	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Recessed	-4°F	125°F	-4°F	120°F	-4°F	100°F

6 WIRE INPUT/OUTPUT


SINGLE (Input only)



PASS THROUGH (Input/Output)




CONFIGURATION OPTIONS

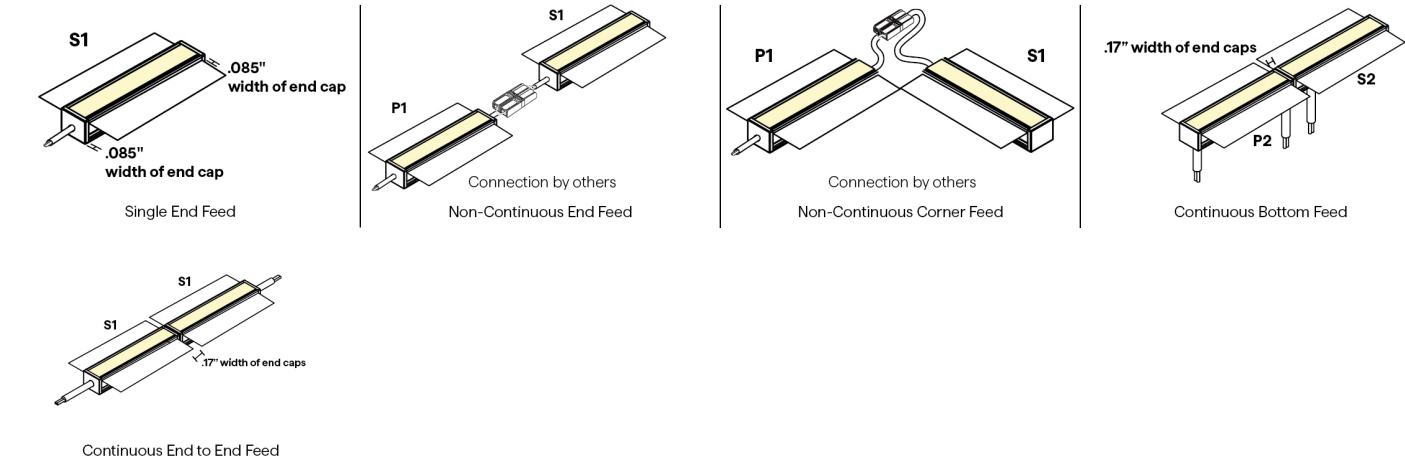

7 / 8 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out

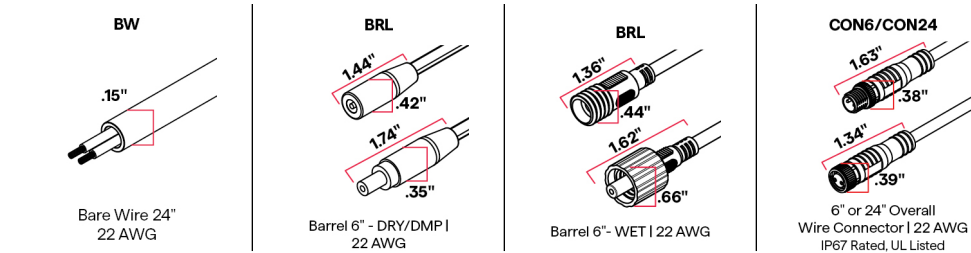

9 WIRE COLOR






MICRO 5 SLITE-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Recessed

11 MOUNTING

SC



Screw

#8 Flat head screw

12 FINISH



Satin


Custom finishes require a longer lead time, consult factory

15 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

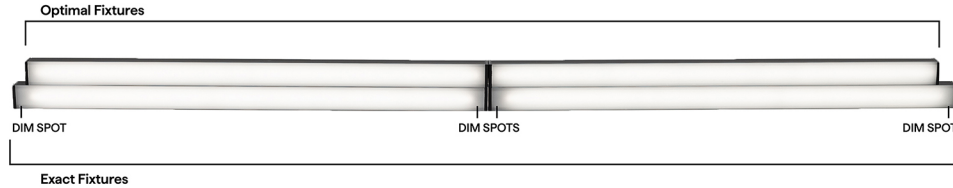



MICRO 5 SLITE-ENCAPSULATED (03) STATIC WHITE





24VDC Linear Fixtures - Recessed

SW ENC LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture <div>S1  End Feed</div>
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

OPTIMAL LENGTH


Requested Nominal Length	S1  End Feed	S2  Bottom Feed	P1  End Feed	P2  Bottom Feed
12"	11.38"	11.38"	11.63"	11.63"
13"	12.38"	12.38"	12.63"	12.63"
14"	13.38"	13.38"	13.63"	13.63"
15"	14.38"	14.38"	14.63"	14.63"
16"	15.38"	15.38"	15.63"	15.63"
17"	16.38"	16.38"	16.63"	16.63"
18"	17.38"	17.38"	17.63"	17.63"
19"	18.38"	18.38"	18.63"	18.63"
20"	19.38"	19.38"	19.63"	19.63"
21"	20.38"	20.38"	20.63"	20.63"
22"	21.38"	21.38"	21.63"	21.63"
23"	22.38"	22.38"	22.63"	22.63"
24"	23.38"	23.38"	23.63"	23.63"
36"	35.38"	35.38"	35.63"	35.63"
48"	47.38"	47.38"	47.63"	47.63"
60"	59.38"	59.38"	59.63"	59.63"
72"	71.38"	71.38"	71.63"	71.63"
84"	83.38"	83.38"	83.63"	83.63"
96"	95.38"	95.38"	95.63"	95.63"

14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

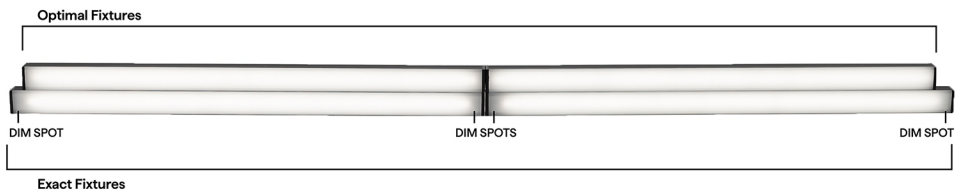



MICRO 5 SLITE-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	MICRO 5-SW	MICRO 5-SW
Dim to Black	Q6M-DC+CAP QTM-DC+CAP IQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED










MICRO 5 SLITE-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Recessed

DIMMING PROTOCOL	INDOOR	OUTDOOR
	MICRO 5-SW	MICRO 5-SW
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

COMPATIBLE WIRING ACCESSORIES

 <p>Q-mini-J</p> <p>2"</p> <p>1.25"</p> <p>UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)</p>	 <p>Q-mini-J5</p> <p>2.80"</p> <p>2.27"</p> <p>UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)</p>	 <p>BARREL-EXT</p> <p>8ft barrel cable extender DRY ONLY</p>	 <p>BARREL FOUR-FER</p> <p>Splits lead from one to four LED Barrel connector fixtures, DRY/DMP</p>	 <p>CON120-EXT</p> <p>10ft Con cable extender DRY/DMP/WET</p>	 <p>CON FOUR-FER</p> <p>Splits lead from one to four LED Con connectors DRY/DMP/WET</p>	 <p>CON M - BARREL F</p> <p>Male con to barrel cable adaptor DRY/DMP</p>
--	--	---	---	--	--	--

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE





MICRO 5 SLITE-ENCAPSULATED (03) STATIC WHITE

24VDC Linear Fixtures - Recessed

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage