





# OPTI-FLAT (01) FOR TUNABLE APPLICATIONS

## 24VDC Linear Fixtures - Surface & Recessed



- Choose from diffused, polar or frosted lens options for varying diode visibility and beam cutoff
- Delivers smooth and consistent light to highlight architectural features and surfaces
- Ideal for surface-mounted installations
- Integrated metal end caps combined with an extruded aluminum housing give this fixture a polished modern look
- When using DALI and DMX power supplies, LED wattage must be doubled

### INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5
PRODUCT	WATTS/ FT	CCT	RATED	LENS

### ADDITIONAL INFORMATION REQUIRED TO ORDER

6	7	8	9	10	11	12	13	14
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **OP1DW-2.5HE-20/30-DRY-DF-P1-CON6-CON6-WH-CL2-CC-WH-48"-E**

<b>1</b> <b>PRODUCT</b> <b>OP1DW</b> <b>OP1DW-USA</b>  Select USA option for BAA and BABA projects. Only DRY or WET ratings apply.  LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b>  <b>1.5HE</b> 1.5W/ft HE <b>2.5HE</b> 2.5W/ft HE <b>4.0HE</b> 4.0W/ft HE  <b>1.5HE</b> 1.5W/ft HE <b>2.5HE</b> 2.5W/ft HE <b>4.0HE</b> 4.0W/ft HE  <b>1.5HE</b> 1.5W/ft HE <b>2.5HE</b> 2.5W/ft HE	<b>3</b> <b>CCT</b>  <b>20/27</b> 2000K/2700K <b>20/30</b> 2000K/3000K <b>27/40</b> 2700K/4000K <b>27/55</b> 2700K/5500K  <b>18/30</b> 1800K/3000K <b>18/35</b> 1800K/3500K <b>20/27</b> 2000K/2700K <b>20/30</b> 2000K/3000K <b>24/40</b> 2400K/4000K <b>27/40</b> 2700K/4000K <b>27/55</b> 2700K/5500K  <b>20/27</b> 2000K/2700K <b>20/30</b> 2000K/3000K <b>27/40</b> 2700K/4000K <b>27/55</b> 2700K/5500K	<b>4</b> <b>RATED</b>  <b>DRY</b> IP20  <b>DMP</b> IP54  <b>WET</b> IP67	<b>5</b> <b>LENS</b>  <b>DF</b> Diffused <b>PR</b> Polar <b>FR</b> Frosted	<b>6</b> <b>WIRE INPUT/OUTPUT</b>  <b>SINGLE (Input only)</b> <b>S1</b> End Feed <b>S2</b> Bottom Feed  <b>PASS THROUGH (Input/Output)</b> <b>P1</b> End Feed <b>P2</b> Bottom Feed	<b>7</b> <b>CONNECTOR/WIRE IN</b>  <b>BW</b> Bare Wire (Standard 36") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  <b>BW</b> Bare Wire (Standard 36") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"	<b>8</b> <b>CONNECTOR/WIRE OUT</b>  <b>CLS</b> Closed End (No feed)  <b>BW</b> Bare Wire (Standard 36") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"	<b>9</b> <b>WIRE COLOR</b>  <b>WH</b> White <b>BK</b> Black	<b>10</b> <b>WIRE TYPE</b>  <b>CL2</b> Class 2 <b>CL2P</b> Plenum Rated  CL2P only available with bare wire leads (BW)	<b>11</b> <b>MOUNTING</b>  <b>CC</b> Concealed Clip <b>MG</b> Magnet	<b>12</b> <b>FINISH</b>  <b>ST</b> Satin <b>BK</b> Black <b>WH</b> White <b>CU</b> Custom  Custom finishes have longer lead times. Non-RAL 9003 whites custom.	<b>13</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".	<b>14</b> <b>EXACT/OPTIMAL</b>  <b>O</b> Optimal Illumination <b>E</b> Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end.
---	---	--	---	---	--	--	--	---	--	--	--	--	--

For continuous mounting, consider bottom feed.

BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)


BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)




# OPTI-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed


## 1 PRODUCT - DIMENSIONS




Profile



Profile with  
concealed clip



Profile with magnet clip



Profile with magnet mount  
clip and magnet mount  
accessory

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]  
Tested with OP1DW-2.5HE-\*\*-DRY-STD

	3000K	
	LM/FT	CRI
FR	219	98
PR	206	98
DF	182	98


## TEMPERATURE RATINGS

DRY	Ambient Operating Temp - Surface	DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT		DW 4.0 HE W/FT		DW 8.0 HE W/FT	
		QTL power supply other than DALI DMX		DALI DMX, or non-QTL power supply		QTL power supply other than DALI DMX		DALI DMX, or non-QTL power supply		QTL power supply other than DALI DMX		DALI DMX, or non-QTL power supply	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
		-4°F	145°F	-4°F	135°F	-4°F	140°F	-4°F	125°F	-4°F	130°F	-4°F	115°F

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

2.5HEW/ft      Frosted Lens






# OPTI-FLAT (01) FOR TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

## 6 WIRE INPUT/OUTPUT


SINGLE (Input only)




PASS THROUGH (Input/Output)



## CONFIGURATION OPTIONS

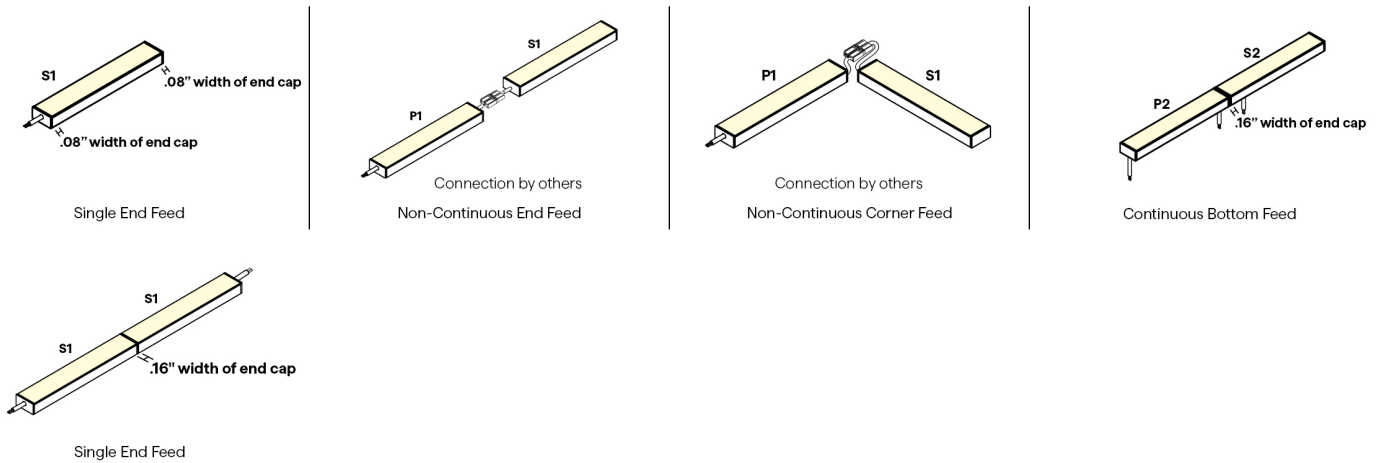

## 7 / 8 CONNECTOR/WIRE - IN/OUT

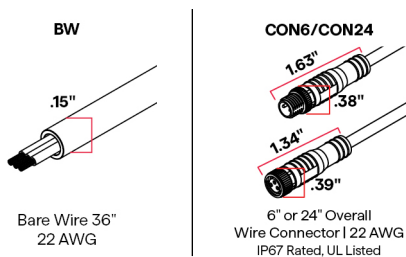

## 9 WIRE COLOR






# OPTI-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 11 MOUNTING

CC  
(CC-01)



Concealed Clip

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'

To order separately use CC-01 (sold in pairs)

Each clips comes with a #4 x 5/8" Flat Head screw.

MG




Magnet Clip

One MG provided per foot

To order separately use MG-02

MMA-02



Magnet Mount  
Accessory for MG-02

Sold separately, to order use MMA-02

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface


## 12 FINISH



Custom finishes require a longer lead time, consult factory

## 14 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

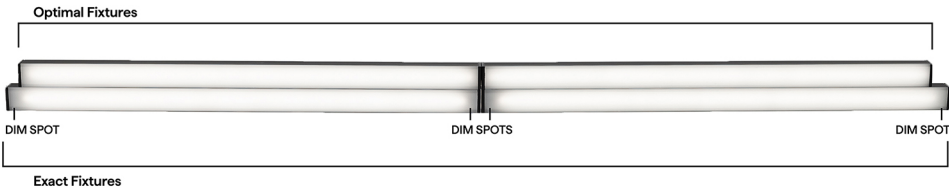




# OPTI-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed





## DW-HE DRY DMP LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"


### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
				
12"	10.51"		10.86"	
13"	12.51"		12.86"	
14"	12.51"		12.86"	
15"	14.51"		14.86"	
16"	14.51"		14.86"	
17"	16.51"		16.86"	
18"	16.51"		16.86"	
19"	18.51"		18.86"	
20"	18.51"		18.86"	
21"	20.51"		20.86"	
22"	20.51"		20.86"	
23"	22.51"		22.86"	
24"	22.51"		22.86"	
36"	34.51"		34.86"	
48"	46.51"		46.86"	
60"	58.51"		58.86"	
72"	70.51"		70.86"	
84"	82.51"		82.86"	
96"	94.51"		94.86"	





## DW-HE WET LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
				
12"	10.66"		11.06"	
13"	12.66"		11.06"	
14"	12.66"		13.06"	
15"	14.66"		13.06"	
16"	14.66"		15.06"	
17"	16.66"		15.06"	
18"	16.66"		17.06"	
19"	18.66"		17.06"	
20"	18.66"		19.06"	
21"	20.66"		19.06"	
22"	20.66"		21.06"	
23"	22.66"		21.06"	
24"	22.66"		23.06"	
36"	34.66"		35.06"	
48"	46.66"		47.06"	
60"	58.66"		59.06"	
72"	70.66"		71.06"	
84"	82.66"		83.06"	
96"	94.66"		95.06"	



# OPTI-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED+TW-AWN QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+TW QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle	














DIMMING PROTOCOL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
0-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN	QOM-eLED+TW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN	
DMX LED wattage must be doubled for DW-HE products	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle	




# OPTI-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-M</b>  1.41" .71" Adjustable mounting bracket - Medium	<b>HINGE - HMB-L</b>  1.46" 1.29" Adjustable mounting bracket - Large	<b>HINGE - HMB-XL</b>  4" 1.46" Adjustable mounting bracket - XLarge	<b>Q-PIVOT</b>  .75" 1.03" Small mounting accessory	<b>Q-ANGLE</b>  2.23" 1.38" Adjustable mounting accessory	<b>QUOVA-STANDARD</b>  QUOVA Knife Edge	<b>NJ-LARGE</b>  J Mounting Bracket	<b>NU-LARGE</b>  U Mounting Bracket	<b>SD-J-LARGE</b>  J Mounting Bracket	<b>BL-LARGE</b>  Backwards L Mounting Bracket
<b>NL-LARGE</b>  L Mounting Bracket	<b>SD-L-LARGE</b>  L Mounting Bracket	<b>MMA-02</b>  .58" Magnet Mount Accessory of MG-02							

## COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

## COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

## COMPATIBLE APPS



Read and write DMX addresses and adjust voltage