



# OPTI-OPTICS (02) STATIC WHITE

## 24VDC Linear Fixtures - Surface & Recessed





410.2 & 410.16  
Closet Rated  
up to 4.0W/ft



SW/SW-HE  
ONLY



SW, SW-HE  
ONLY



- Choose from 9 lens options: 40°, 60°, 70°, 90°, 110°, 155°, 180°, Asymmetric, & Forward Throw
- Delivers smooth and consistent light to highlight architectural features and surfaces
- Ideal for surface-mounted or recessed installations
- Integrated metal end caps combined with an extruded aluminum housing give this fixture a polished modern look
- Suitable for installation in the storage area of a clothes closet when specified at 4.0 watts or less per foot per NEC regulations

### INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5
PRODUCT	WATTS/ FT	CCT	RATED	LENS

### ADDITIONAL INFORMATION REQUIRED TO ORDER

6	7	8	9	10	11	12	13	14
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **OP2SW-5.0-30-DRY-155D-P1-CON6-CON6-WH-CL2-CC-WH-48"-E**

<b>1</b> <b>PRODUCT</b> <b>OP2SW</b> <b>OP2SW-USA</b> Select USA option for BAA and BABA projects. See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b> <table><tr><td>1.5</td><td>1.5W/ft</td></tr><tr><td>3.0</td><td>3.0W/ft</td></tr><tr><td>4.0</td><td>4.0W/ft</td></tr><tr><td>5.0</td><td>5.0W/ft</td></tr><tr><td>1.5HE</td><td>1.5W/ft HE</td></tr><tr><td>3.0HE</td><td>3.0W/ft HE</td></tr><tr><td>6.0HE</td><td>6.0W/ft HE</td></tr><tr><td>9.0HE</td><td>9.0W/ft HE</td></tr></table> <table><tr><td>3.0HE+</td><td>3.0W/ft HE+</td></tr><tr><td>6.0HE+</td><td>6.0W/ft HE+</td></tr></table> <table><tr><td>1.5</td><td>1.5W/ft</td></tr><tr><td>3.0</td><td>3.0W/ft</td></tr><tr><td>4.0</td><td>4.0W/ft</td></tr><tr><td>5.0</td><td>5.0W/ft</td></tr><tr><td>1.5HE</td><td>1.5W/ft HE</td></tr><tr><td>3.0HE</td><td>3.0W/ft HE</td></tr><tr><td>6.0HE</td><td>6.0W/ft HE</td></tr></table>	1.5	1.5W/ft	3.0	3.0W/ft	4.0	4.0W/ft	5.0	5.0W/ft	1.5HE	1.5W/ft HE	3.0HE	3.0W/ft HE	6.0HE	6.0W/ft HE	9.0HE	9.0W/ft HE	3.0HE+	3.0W/ft HE+	6.0HE+	6.0W/ft HE+	1.5	1.5W/ft	3.0	3.0W/ft	4.0	4.0W/ft	5.0	5.0W/ft	1.5HE	1.5W/ft HE	3.0HE	3.0W/ft HE	6.0HE	6.0W/ft HE	<b>3</b> <b>CCT</b> <table><tr><td>20</td><td>2000K</td></tr><tr><td>22</td><td>2200K</td></tr><tr><td>24</td><td>2400K</td></tr><tr><td>27</td><td>2700K</td></tr><tr><td>30</td><td>3000K</td></tr><tr><td>35</td><td>3500K</td></tr><tr><td>40</td><td>4000K</td></tr></table> <table><tr><td>27</td><td>2700K</td></tr><tr><td>30</td><td>3000K</td></tr><tr><td>35</td><td>3500K</td></tr><tr><td>40</td><td>4000K</td></tr></table> <table><tr><td>18</td><td>1800K</td></tr><tr><td>20</td><td>2000K</td></tr><tr><td>22</td><td>2200K</td></tr><tr><td>24</td><td>2400K</td></tr><tr><td>27</td><td>2700K</td></tr><tr><td>30</td><td>3000K</td></tr><tr><td>35</td><td>3500K</td></tr><tr><td>40</td><td>4000K</td></tr></table>	20	2000K	22	2200K	24	2400K	27	2700K	30	3000K	35	3500K	40	4000K	27	2700K	30	3000K	35	3500K	40	4000K	18	1800K	20	2000K	22	2200K	24	2400K	27	2700K	30	3000K	35	3500K	40	4000K	<b>4</b> <b>RATED</b> <table><tr><td>DRY</td><td>IP20</td></tr></table> <table><tr><td>DMP</td><td>IP54</td></tr></table>	DRY	IP20	DMP	IP54	<b>5</b> <b>LENS</b> <table><tr><td>40D</td><td>Optical 40°</td></tr><tr><td>60D</td><td>Optical 60°</td></tr><tr><td>70D</td><td>Optical 70°</td></tr><tr><td>90D</td><td>Optical 90°</td></tr><tr><td>110D</td><td>Optical 110°</td></tr><tr><td>155D</td><td>Optical 155°</td></tr><tr><td>180D</td><td>Optical 180°</td></tr></table> <table><tr><td>ASYM</td><td>Asymmetric</td></tr><tr><td>FT</td><td>Forward Throw</td></tr></table> <p>40D, 60D, 70D, 90D, 110D, 155D, 180D, and ASYM are offered in 44.9" lengths. For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages</p>	40D	Optical 40°	60D	Optical 60°	70D	Optical 70°	90D	Optical 90°	110D	Optical 110°	155D	Optical 155°	180D	Optical 180°	ASYM	Asymmetric	FT	Forward Throw	<b>6</b> <b>WIRE INPUT/OUTPUT</b> <table><tr><td colspan="2"><b>SINGLE (Input only)</b></td></tr><tr><td>S1</td><td>End Feed</td></tr><tr><td>S2</td><td>Bottom Feed</td></tr></table> <table><tr><td colspan="2"><b>PASS THROUGH (Input/Output)</b></td></tr><tr><td>P1</td><td>End Feed</td></tr><tr><td>P2</td><td>Bottom Feed</td></tr></table> <table><tr><td colspan="2"><b>SINGLE (Input only)</b></td></tr><tr><td>S1A</td><td>End Feed</td></tr><tr><td>S1B</td><td>End Feed</td></tr><tr><td>S2A</td><td>Bottom Feed</td></tr><tr><td>S2B</td><td>Bottom Feed</td></tr></table> <table><tr><td colspan="2"><b>PASS THROUGH (Input/Output)</b></td></tr><tr><td>P1A</td><td>End Feed</td></tr><tr><td>P1B</td><td>End Feed</td></tr><tr><td>P2A</td><td>Bottom Feed</td></tr><tr><td>P2B</td><td>Bottom Feed</td></tr></table>	<b>SINGLE (Input only)</b>		S1	End Feed	S2	Bottom Feed	<b>PASS THROUGH (Input/Output)</b>		P1	End Feed	P2	Bottom Feed	<b>SINGLE (Input only)</b>		S1A	End Feed	S1B	End Feed	S2A	Bottom Feed	S2B	Bottom Feed	<b>PASS THROUGH (Input/Output)</b>		P1A	End Feed	P1B	End Feed	P2A	Bottom Feed	P2B	Bottom Feed	<b>7</b> <b>CONNECTOR/WIRE IN</b> <table><tr><td>BW</td><td>Bare Wire (Standard 36")</td></tr><tr><td>CON6</td><td>Connector 6"</td></tr><tr><td>CON24</td><td>Connector 24"</td></tr></table> <table><tr><td>BW</td><td>Bare Wire (Standard 36")</td></tr><tr><td>CON6</td><td>Connector 6"</td></tr><tr><td>CON24</td><td>Connector 24"</td></tr></table> <table><tr><td>BW</td><td>Bare Wire (Standard 36")</td></tr><tr><td>CON6</td><td>Connector 6"</td></tr><tr><td>CON24</td><td>Connector 24"</td></tr></table> <table><tr><td>BW</td><td>Bare Wire (Standard 36")</td></tr><tr><td>CON6</td><td>Connector 6"</td></tr><tr><td>CON24</td><td>Connector 24"</td></tr></table>	BW	Bare Wire (Standard 36")	CON6	Connector 6"	CON24	Connector 24"	BW	Bare Wire (Standard 36")	CON6	Connector 6"	CON24	Connector 24"	BW	Bare Wire (Standard 36")	CON6	Connector 6"	CON24	Connector 24"	BW	Bare Wire (Standard 36")	CON6	Connector 6"	CON24	Connector 24"	<b>8</b> <b>CONNECTOR/WIRE OUT</b> <table><tr><td>CLS</td><td>Closed End (No feed)</td></tr></table> <table><tr><td>BW</td><td>Bare Wire (Standard 36")</td></tr><tr><td>CON6</td><td>Connector 6"</td></tr><tr><td>CON24</td><td>Connector 24"</td></tr></table> <table><tr><td>CLS</td><td>Closed End (No feed)</td></tr></table> <table><tr><td>BW</td><td>Bare Wire (Standard 36")</td></tr><tr><td>CON6</td><td>Connector 6"</td></tr><tr><td>CON24</td><td>Connector 24"</td></tr></table>	CLS	Closed End (No feed)	BW	Bare Wire (Standard 36")	CON6	Connector 6"	CON24	Connector 24"	CLS	Closed End (No feed)	BW	Bare Wire (Standard 36")	CON6	Connector 6"	CON24	Connector 24"	<b>9</b> <b>WIRE COLOR</b> <table><tr><td>WH</td><td>White</td></tr><tr><td>BK</td><td>Black</td></tr></table>	WH	White	BK	Black	<b>10</b> <b>WIRE TYPE</b> <table><tr><td>CL2</td><td>Class 2</td></tr><tr><td>CL2P</td><td>Plenum Rated</td></tr></table> <p>CL2P only available with bare wire leads (BW)</p>	CL2	Class 2	CL2P	Plenum Rated	<b>11</b> <b>MOUNTING</b> <table><tr><td>CC</td><td>Concealed Clip</td></tr><tr><td>MG</td><td>Magnet</td></tr></table>	CC	Concealed Clip	MG	Magnet	<b>12</b> <b>FINISH</b> <table><tr><td>ST</td><td>Satin</td></tr><tr><td>BK</td><td>Black</td></tr><tr><td>WH</td><td>White</td></tr><tr><td>CU</td><td>Custom</td></tr></table> <p>Custom finishes have longer lead times. Non-RAL 9003 whites custom.</p>	ST	Satin	BK	Black	WH	White	CU	Custom	<b>13</b> <b>LENGTH (IN)</b> <p>Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".</p>	<b>14</b> <b>EXACT/OPTIMAL</b> <table><tr><td>O</td><td>Optimal Illumination</td></tr><tr><td>E</td><td>Exact Specified Length</td></tr></table> <p>Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end.</p>	O	Optimal Illumination	E	Exact Specified Length
1.5	1.5W/ft																																																																																																																																																																																																										
3.0	3.0W/ft																																																																																																																																																																																																										
4.0	4.0W/ft																																																																																																																																																																																																										
5.0	5.0W/ft																																																																																																																																																																																																										
1.5HE	1.5W/ft HE																																																																																																																																																																																																										
3.0HE	3.0W/ft HE																																																																																																																																																																																																										
6.0HE	6.0W/ft HE																																																																																																																																																																																																										
9.0HE	9.0W/ft HE																																																																																																																																																																																																										
3.0HE+	3.0W/ft HE+																																																																																																																																																																																																										
6.0HE+	6.0W/ft HE+																																																																																																																																																																																																										
1.5	1.5W/ft																																																																																																																																																																																																										
3.0	3.0W/ft																																																																																																																																																																																																										
4.0	4.0W/ft																																																																																																																																																																																																										
5.0	5.0W/ft																																																																																																																																																																																																										
1.5HE	1.5W/ft HE																																																																																																																																																																																																										
3.0HE	3.0W/ft HE																																																																																																																																																																																																										
6.0HE	6.0W/ft HE																																																																																																																																																																																																										
20	2000K																																																																																																																																																																																																										
22	2200K																																																																																																																																																																																																										
24	2400K																																																																																																																																																																																																										
27	2700K																																																																																																																																																																																																										
30	3000K																																																																																																																																																																																																										
35	3500K																																																																																																																																																																																																										
40	4000K																																																																																																																																																																																																										
27	2700K																																																																																																																																																																																																										
30	3000K																																																																																																																																																																																																										
35	3500K																																																																																																																																																																																																										
40	4000K																																																																																																																																																																																																										
18	1800K																																																																																																																																																																																																										
20	2000K																																																																																																																																																																																																										
22	2200K																																																																																																																																																																																																										
24	2400K																																																																																																																																																																																																										
27	2700K																																																																																																																																																																																																										
30	3000K																																																																																																																																																																																																										
35	3500K																																																																																																																																																																																																										
40	4000K																																																																																																																																																																																																										
DRY	IP20																																																																																																																																																																																																										
DMP	IP54																																																																																																																																																																																																										
40D	Optical 40°																																																																																																																																																																																																										
60D	Optical 60°																																																																																																																																																																																																										
70D	Optical 70°																																																																																																																																																																																																										
90D	Optical 90°																																																																																																																																																																																																										
110D	Optical 110°																																																																																																																																																																																																										
155D	Optical 155°																																																																																																																																																																																																										
180D	Optical 180°																																																																																																																																																																																																										
ASYM	Asymmetric																																																																																																																																																																																																										
FT	Forward Throw																																																																																																																																																																																																										
<b>SINGLE (Input only)</b>																																																																																																																																																																																																											
S1	End Feed																																																																																																																																																																																																										
S2	Bottom Feed																																																																																																																																																																																																										
<b>PASS THROUGH (Input/Output)</b>																																																																																																																																																																																																											
P1	End Feed																																																																																																																																																																																																										
P2	Bottom Feed																																																																																																																																																																																																										
<b>SINGLE (Input only)</b>																																																																																																																																																																																																											
S1A	End Feed																																																																																																																																																																																																										
S1B	End Feed																																																																																																																																																																																																										
S2A	Bottom Feed																																																																																																																																																																																																										
S2B	Bottom Feed																																																																																																																																																																																																										
<b>PASS THROUGH (Input/Output)</b>																																																																																																																																																																																																											
P1A	End Feed																																																																																																																																																																																																										
P1B	End Feed																																																																																																																																																																																																										
P2A	Bottom Feed																																																																																																																																																																																																										
P2B	Bottom Feed																																																																																																																																																																																																										
BW	Bare Wire (Standard 36")																																																																																																																																																																																																										
CON6	Connector 6"																																																																																																																																																																																																										
CON24	Connector 24"																																																																																																																																																																																																										
BW	Bare Wire (Standard 36")																																																																																																																																																																																																										
CON6	Connector 6"																																																																																																																																																																																																										
CON24	Connector 24"																																																																																																																																																																																																										
BW	Bare Wire (Standard 36")																																																																																																																																																																																																										
CON6	Connector 6"																																																																																																																																																																																																										
CON24	Connector 24"																																																																																																																																																																																																										
BW	Bare Wire (Standard 36")																																																																																																																																																																																																										
CON6	Connector 6"																																																																																																																																																																																																										
CON24	Connector 24"																																																																																																																																																																																																										
CLS	Closed End (No feed)																																																																																																																																																																																																										
BW	Bare Wire (Standard 36")																																																																																																																																																																																																										
CON6	Connector 6"																																																																																																																																																																																																										
CON24	Connector 24"																																																																																																																																																																																																										
CLS	Closed End (No feed)																																																																																																																																																																																																										
BW	Bare Wire (Standard 36")																																																																																																																																																																																																										
CON6	Connector 6"																																																																																																																																																																																																										
CON24	Connector 24"																																																																																																																																																																																																										
WH	White																																																																																																																																																																																																										
BK	Black																																																																																																																																																																																																										
CL2	Class 2																																																																																																																																																																																																										
CL2P	Plenum Rated																																																																																																																																																																																																										
CC	Concealed Clip																																																																																																																																																																																																										
MG	Magnet																																																																																																																																																																																																										
ST	Satin																																																																																																																																																																																																										
BK	Black																																																																																																																																																																																																										
WH	White																																																																																																																																																																																																										
CU	Custom																																																																																																																																																																																																										
O	Optimal Illumination																																																																																																																																																																																																										
E	Exact Specified Length																																																																																																																																																																																																										

For continuous mounting, consider bottom feed.

BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)


BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)




# OPTI-OPTICS (02) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed


## 1 PRODUCT - DIMENSIONS




Profile




Profile with concealed clip




Profile with magnet clip




Profile with magnet mount clip and magnet mount accessory




Profile with 40D lens




Profile with 60D lens




Profile with 70D lens




Profile with 90D lens




Profile with 110D lens




Profile with 155D lens



Profile with 180D lens



Profile with asymmetric lens



Profile with forward throw lens

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 66000 for HE, L70 = 55000 for HE+]  
Tested with OP2SW-\*\*-30-DRY-STD

	1.5 W/FT		1.5HE W/FT		3.0 W/FT		3.0HE W/FT		3.0HE+ W/FT		4.0 W/FT		5.0 W/FT		6.0HE W/FT		6.0HE+ W/FT		9.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
40D	156	98	179	98	281	98	338	98	561	92	331	98	415	98	692	98	764	92	906	98
60D	142	98	173	98	255	98	320	98	543	92	315	98	389	98	667	98	740	92	858	98
70D	149	98	175	98	262	98	333	98	528	92	321	98	402	98	682	98	733	92	888	98
90D	146	98	172	98	261	98	331	98	546	92	321	98	394	98	672	98	745	92	872	98
110D	142	98	161	98	249	98	306	98	534	92	308	98	372	98	603	98	730	92	835	98
155D	140	98	161	98	250	98	307	98	539	92	307	98	375	98	590	98	726	92	838	98
180D	143	98	167	98	251	98	307	98	537	92	310	98	378	98	607	98	733	92	844	98
ASYM	143	98	169	98	253	98	317	98	538	92	311	98	401	98	655	98	739	92	866	98
FT	122	98	154	98	225	98	305	98	419	92	270	98	331	98	576	98	664	92	820	98

## TEMPERATURE RATINGS


		1.5 W/FT		1.5 W/FT HE		3.0 W/FT		3.0 W/FT HE		3.0 W/FT HE+		4.0 W/FT		5.0 W/FT		6.0 W/FT HE		6.0 W/FT HE+		9.0 HE	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	145°F	-4°F	135°F	-4°F	135°F	-13°F	135°F	-4°F	130°F	-4°F	125°F	-4°F	125°F	-13°F	125°F	-4°F	105°F



# OPTI-OPTICS (02) STATIC WHITE


## 24VDC Linear Fixtures - Surface & Recessed

### 5 DIODE VISIBILITY

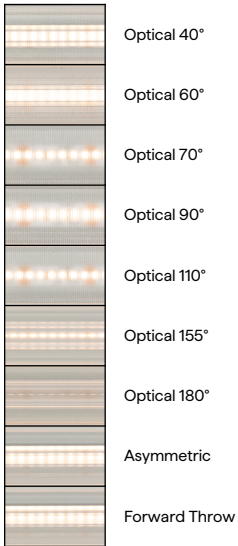

### PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

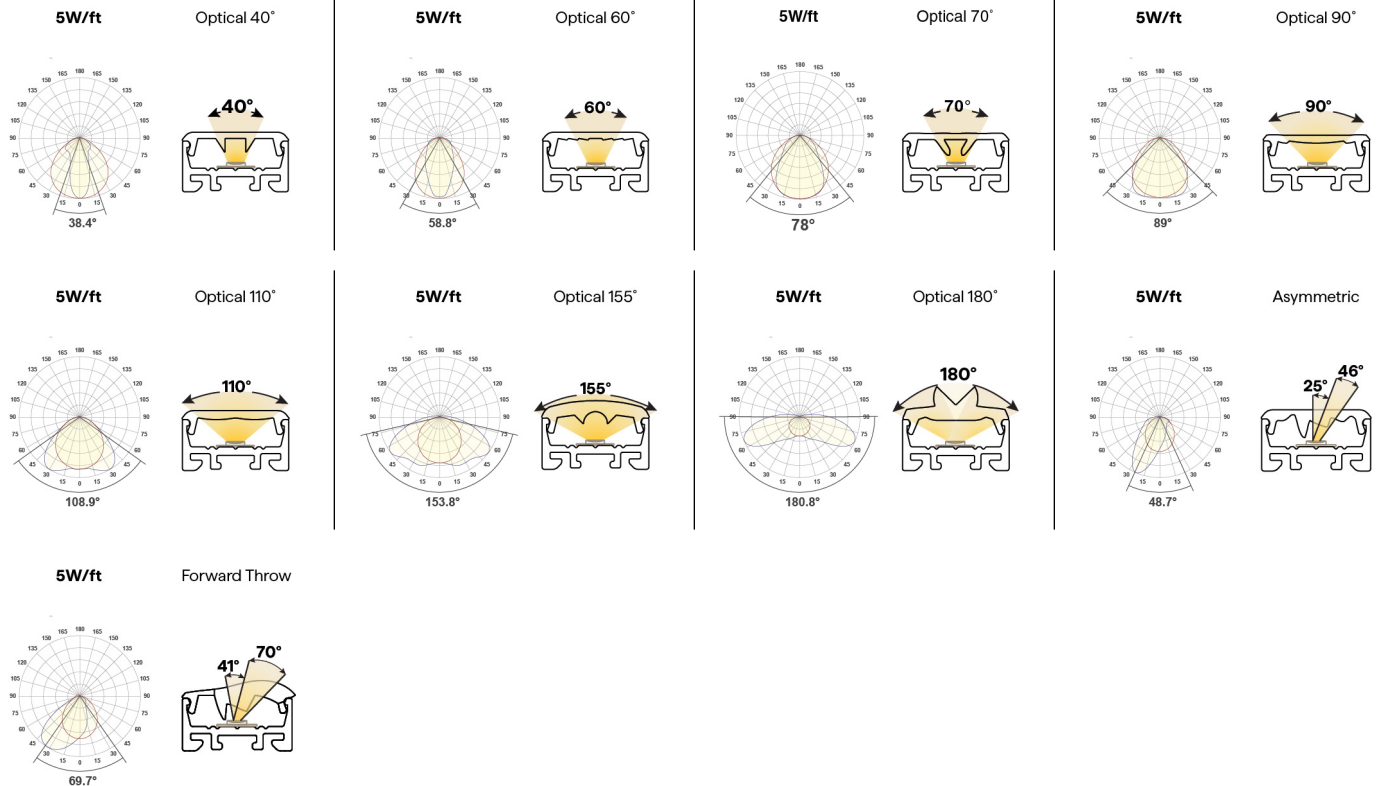




# OPTI-OPTICS (02) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

## 6 WIRE INPUT/OUTPUT


SINGLE (Input only)




PASS THROUGH (Input/Output)




ASYMMETRIC ONLY SINGLE (Input only)

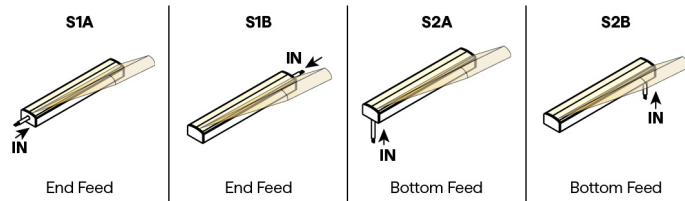

ASYMMETRIC ONLY PASS THROUGH (Input/Output)

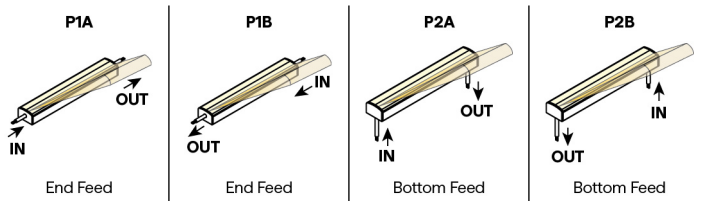

## CONFIGURATION OPTIONS

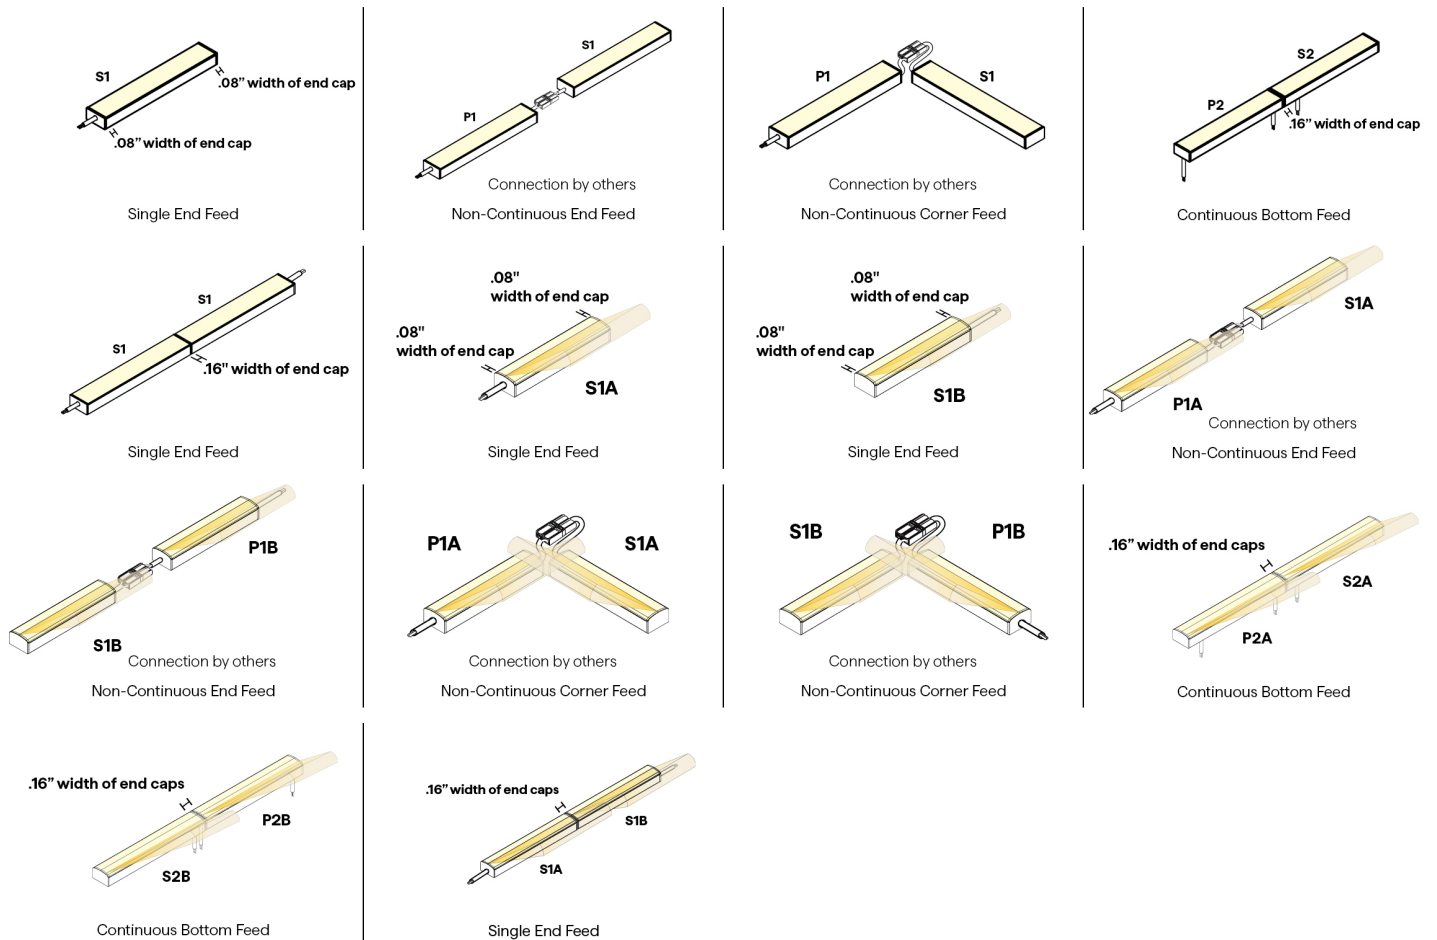





# OPTI-OPTICS (02) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

## 7 / 8 CONNECTOR/WIRE - IN/OUT



Bare Wire 36"  
22 AWG




6" or 24" Overall  
Wire Connector | 22 AWG  
IP67 Rated, UL Listed

## 9 WIRE COLOR



## 11 MOUNTING

CC  
(CC-01)



Concealed Clip

2 pieces of hardware provided  
for 4' or less; 4 pieces of  
hardware provided for greater  
than 4'

To order separately use CC-01  
(sold in pairs)

Each clips comes with a #4 x  
5/8" Flat Head screw.

MG




Magnet Clip

One MG provided per foot

To order separately use  
MG-02

MMA-02



Magnet Mount  
Accessory for MG-02

Sold separately, to order use  
MMA-02

Each bracket comes with 2 #6  
x 5/8" Flat Head SS

Required when mounting to a  
non-magnetic surface


## 12 FINISH



Custom finishes require a longer  
lead time, consult factory

## 14 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

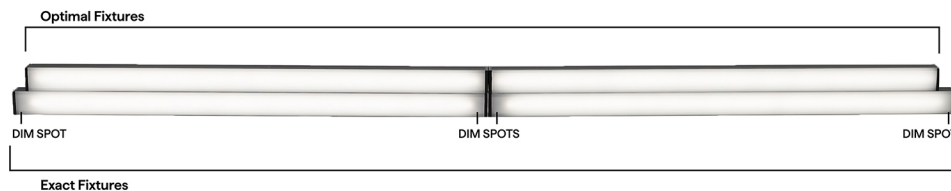




# OPTI-OPTICS (02) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed





## SW DRY LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"


### OPTIMAL LENGTH

Requested Nominal Length	S1 & S1A/B & S2 & S2A/B		P1 & P1A/B & P2 & P2A/B	
				
12"	11.41"		11.66"	
13"	12.41"		12.66"	
14"	13.41"		13.66"	
15"	14.41"		14.66"	
16"	15.41"		15.66"	
17"	16.41"		16.66"	
18"	17.41"		17.66"	
19"	18.41"		18.66"	
20"	19.41"		19.66"	
21"	20.41"		20.66"	
22"	21.41"		21.66"	
23"	22.41"		22.66"	
24"	23.41"		23.66"	
36"	35.41"		35.66"	
48"	47.41"		47.66"	
60"	59.41"		59.66"	
72"	71.41"		71.66"	
84"	83.41"		83.66"	
96"	95.41"		95.66"	





## SW-HE, SW-HE+ DRY LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S1A/B & S2 & S2A/B		P1 & P1A/B & P2 & P2A/B	
				
12"	10.41"		10.66"	
13"	12.41"		12.66"	
14"	12.41"		12.66"	
15"	14.41"		14.66"	
16"	14.41"		14.66"	
17"	16.41"		16.66"	
18"	16.41"		16.66"	
19"	18.41"		18.66"	
20"	18.41"		18.66"	
21"	20.41"		20.66"	
22"	20.41"		20.66"	
23"	22.41"		22.66"	
24"	22.41"		22.66"	
36"	34.41"		34.66"	
48"	46.41"		46.66"	
60"	58.41"		58.66"	
72"	70.41"		70.66"	
84"	82.41"		82.66"	
96"	94.41"		94.66"	



# OPTI-OPTICS (02) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle

DIMMING PROTOCOL	INDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)	QTM-eLED(E)
DMX	QZ-DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle



# OPTI-OPTICS (02) STATIC WHITE

## 24VDC Linear Fixtures - Surface & Recessed

### COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-M</b>  1.41" .71" Adjustable mounting bracket - Medium	<b>HINGE - HMB-L</b>  1.46" 1.29" Adjustable mounting bracket - Large	<b>HINGE - HMB-XL</b>  4" 1.46" Adjustable mounting bracket - XLarge	<b>Q-PIVOT</b>  .75" 1.03" Small mounting accessory	<b>Q-ANGLE</b>  2.23" 1.38" Adjustable mounting accessory	<b>QUOVA-STANDARD</b>  QUOVA Knife Edge	<b>NJ-LARGE</b>  J Mounting Bracket	<b>NU-LARGE</b>  U Mounting Bracket	<b>SD-J-LARGE</b>  J Mounting Bracket	<b>BL-LARGE</b>  Backwards L Mounting Bracket
<b>NL-LARGE</b>  L Mounting Bracket	<b>SD-L-LARGE</b>  L Mounting Bracket	<b>MMA-02</b>  .58" Magnet Mount Accessory of MG-02							

### COMPATIBLE WIRING ACCESSORIES

<b>Q-mini-J</b>  2" 1.25" UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	<b>Q-mini-J5</b>  2.80" 2.27" UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	<b>CON120-EXT</b>  10ft Con cable extender DRY/DMP/WET	<b>CON FOUR-FER</b>  Splits lead from one to four LED Con connectors DRY/DMP/WET	<b>CON M - BARREL F</b>  Male con to barrel cable adaptor DRY/DMP
--	--	---	---	--

### COMPATIBLE CONTROL ACCESSORIES

#### SCENE APP DONGLE



### COMPATIBLE APPS

