

# OPTI-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

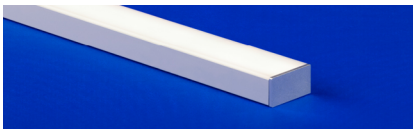




- Choose from diffused, polar or frosted lens options for varying diode visibility and beam cutoff
- Delivers smooth and consistent light to highlight architectural features and surfaces
- Ideal for surface-mounted installations
- Integrated metal end caps combined with an extruded aluminum housing give this fixture a polished modern look
- When using DALI and DMX power supplies, LED wattage must be doubled

**INFORMATION REQUIRED FOR LIGHTING SCHEDULE**

| 1 PRODUCT | 2 WATTS/ FT | 3 CCT | 4 RATED | 5 LENS |
|---|---|---|---|---|
| | | | | |

**ADDITIONAL INFORMATION REQUIRED TO ORDER**

| 6 WIRE INPUT/ OUTPUT | 7 CONNECTOR/ WIRE IN | 8 CONNECTOR/ WIRE OUT | 9 WIRE COLOR | 10 WIRE TYPE | 11 MOUNTING | 12 FINISH | 13 LENGTH (IN) | 14 EXACT/ OPTIMAL |
|---|---|---|---|---|---|---|---|---|
| | | | | | | | | |

Sample Part Number: **OP1DW-2.5HE-20/30-DRY-DF-P1-CON6-CON6-WH-CL2-CC-WH-48"-E**

## 1 PRODUCT

**OP1DW**
**OP1DW-USA**

Select USA option for BAA and BABA projects. Only DRY or WET ratings apply.

LED engine is built with 3 wires requiring 0-10V, DMX or DALI control.
Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.

## 2 WATTS/FT

| | |
|---|---|
| **1.5HE** | 1.5W/ft HE |
| **2.5HE** | 2.5W/ft HE |
| **4.0HE** | 4.0W/ft HE |

| | |
|---|---|
| **1.5HE** | 1.5W/ft HE |
| **2.5HE** | 2.5W/ft HE |

## 3 CCT

| | |
|---|---|
| **18/30** | 1800K/3000K |
| **18/35** | 1800K/3500K |
| **20/27** | 2000K/2700K |
| **20/30** | 2000K/3000K |
| **24/40** | 2400K/4000K |
| **27/40** | 2700K/4000K |
| **27/55** | 2700K/5500K |

| | |
|---|---|
| **18/30** | 1800K/3000K |
| **18/35** | 1800K/3500K |
| **20/27** | 2000K/2700K |
| **20/30** | 2000K/3000K |
| **24/40** | 2400K/4000K |
| **27/40** | 2700K/4000K |
| **27/55** | 2700K/5500K |

## 4 RATED

| | |
|---|---|
| **DRY** | IP20 |

| | |
|---|---|
| **DMP** | IP54 |
| **WET** | IP67 |

Can be suitable for exterior use, contact factory for more information

## 5 LENS

| | |
|---|---|
| **DF** | Diffused |
| **PR** | Polar |
| **FR** | Frosted |

## 6 WIRE INPUT/OUTPUT

| | |
|---|---|
| **SINGLE (Input only)** | |
| **S1** | End Feed |
| **S2** | Bottom Feed |

| | |
|---|---|
| **PASS THROUGH (Input/Output)** | |
| **P1** | End Feed |
| **P2** | Bottom Feed |

For continuous mounting, consider bottom feed.

## 7 CONNECTOR/WIRE IN

| | |
|---|---|
| **BW** | Bare Wire (Standard 36") |
| **CON6** | Connector 6" |
| **CON24** | Connector 24" |

BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

## 8 CONNECTOR/WIRE OUT

| | |
|---|---|
| **CLS** | Closed End (No feed) |

| | |
|---|---|
| **BW** | Bare Wire (Standard 36") |
| **CON6** | Connector 6" |
| **CON24** | Connector 24" |

BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

## 9 WIRE COLOR

| | |
|---|---|
| **WH** | White |
| **BK** | Black |

## 10 WIRE TYPE

| | |
|---|---|
| **CL2** | Class 2 |
| **CL2P** | Plenum Rated |

CL2P only available with bare wire leads (BW)

## 11 MOUNTING

| | |
|---|---|
| **CC** | Concealed Clip |
| **MG** | Magnet |

## 12 FINISH

| | |
|---|---|
| **ST** | Satin |
| **BK** | Black |
| **WH** | White |
| **CU** | Custom |

Custom finishes have longer lead times. Non-RAL 9003 whites custom.

## 13 LENGTH (IN)

Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".

## 14 EXACT/OPTIMAL

| | |
|---|---|
| **O** | Optimal Illumination |
| **E** | Exact Specified Length |

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting


Specification subject to change. Rev-11-11-26

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


# OPTI-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed


## 1 PRODUCT - DIMENSIONS





Profile




Profile with concealed clip




Profile with magnet clip




Profile with magnet mount clip and magnet mount accessory

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with OP1DW-**-30-DRY

| | 1.5HE W/FT | | 2.5HE W/FT | | 4.0HE W/FT | |
|---|---|---|---|---|---|---|
| | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI |
| FR | 146 | 98 | 219 | 98 | 310 | 98 |
| PR | 136 | 98 | 206 | 98 | 292 | 98 |
| DF | 121 | 98 | 182 | 98 | 258 | 98 |

## 5 DIODE VISIBILITY



DF - Diffused lens

PR - Polar lens

FR - Frosted lens

## TEMPERATURE RATINGS

| | | DW 1.5 HE W/FT | | DW 3.0 HE W/FT | | DW 2.5 HE W/FT | | DW 5.0 HE W/FT | | DW 4.0 HE W/FT | | DW 8.0 HE W/FT | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | QTL power supply other than DALI, DMX | | DALI, DMX, or non-QTL power supply | | QTL power supply other than DALI, DMX | | DALI, DMX, or non-QTL power supply | | QTL power supply other than DALI, DMX | | DALI, DMX, or non-QTL power supply | |
| | | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| DRY | Ambient Operating Temp - Surface | -4°F | 145°F | -4°F | 135°F | -4°F | 140°F | -4°F | 125°F | -4°F | 130°F | -4°F | 115°F |
| DMP | Ambient Operating Temp - Surface | -4°F | 145°F | -4°F | 135°F | -4°F | 140°F | -4°F | 125°F | — | — | — | — |
| WET | Ambient Operating Temp - Surface | ** | ** | ** | ** | ** | ** | ** | ** | — | — | — | — |

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-11-11-26


# OPTI-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## PHOTOMETRIC PERFORMANCE


Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

**2.5HEW/ft** Frosted Lens





## 6 WIRE INPUT/OUTPUT

SINGLE (Input only)





End Feed | Bottom Feed

PASS THROUGH (Input/Output)





End Feed | Bottom Feed

## CONFIGURATION OPTIONS





Single End Feed





Connection by others

Non-Continuous End Feed





Connection by others

Non-Continuous Corner Feed




Continuous Bottom Feed




Single End Feed


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# OPTI-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed


## 7/8 CONNECTOR/WIRE – IN/OUT

**BW**





Bare Wire 36"
22 AWG

**CON6/CON24**




6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

## 9 WIRE COLOR




White

Black

## 11 MOUNTING

**CC**
(CC-01)




Concealed Clip

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'

To order separately use CC-01 (sold in pairs)

Each clips comes with a #4 x 5/8" Flat Head screw.

**MG**





Magnet Clip

One MG provided per foot

To order separately use MG-02

**MMA-02**





Magnet Mount
Accessory for MG-02

Sold separately, to order use MMA-02

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface

## 12 FINISH



Satin


Black

White

Custom finishes have longer lead times. Non-RAL 9003 whites custom.

## 14 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

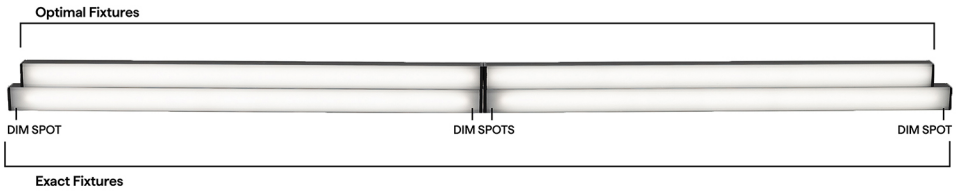


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting


# OPTI-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed



## DW-HE DRY DMP LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 – 1/8". Consult factory for lengths under 12".

### EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture   |
|---|---|
| 12" | 1" |
| 13" | 0.5" |
| 14" | 1" |
| 15" | 0.5" |
| 16" | 1" |
| 17" | 0.5" |
| 18" | 1" |
| 19" | 0.5" |
| 20" | 1" |
| 21" | 0.5" |
| 22" | 1" |
| 23" | 0.5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |


### OPTIMAL LENGTH

| Requested Nominal Length | S1 & S2   | P1 & P2   |
|---|---|---|
| 12" | 10.51" | 10.86" |
| 13" | 12.51" | 12.86" |
| 14" | 12.51" | 12.86" |
| 15" | 14.51" | 14.86" |
| 16" | 14.51" | 14.86" |
| 17" | 16.51" | 16.86" |
| 18" | 16.51" | 16.86" |
| 19" | 18.51" | 18.86" |
| 20" | 18.51" | 18.86" |
| 21" | 20.51" | 20.86" |
| 22" | 20.51" | 20.86" |
| 23" | 22.51" | 22.86" |
| 24" | 22.51" | 22.86" |
| 36" | 34.51" | 34.86" |
| 48" | 46.51" | 46.86" |
| 60" | 58.51" | 58.86" |
| 72" | 70.51" | 70.86" |
| 84" | 82.51" | 82.86" |
| 96" | 94.51" | 94.86" |



## DW-HE WET LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 – 1/8". Consult factory for lengths under 12".

### EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture   |
|---|---|
| 12" | 1" |
| 13" | 0.5" |
| 14" | 1" |
| 15" | 0.5" |
| 16" | 1" |
| 17" | 0.5" |
| 18" | 1" |
| 19" | 0.5" |
| 20" | 1" |
| 21" | 0.5" |
| 22" | 1" |
| 23" | 0.5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |

### OPTIMAL LENGTH

| Requested Nominal Length | S1 & S2   | P1 & P2   |
|---|---|---|
| 12" | 10.66" | 11.06" |
| 13" | 12.66" | 11.06" |
| 14" | 12.66" | 13.06" |
| 15" | 14.66" | 13.06" |
| 16" | 14.66" | 15.06" |
| 17" | 16.66" | 15.06" |
| 18" | 16.66" | 17.06" |
| 19" | 18.66" | 17.06" |
| 20" | 18.66" | 19.06" |
| 21" | 20.66" | 19.06" |
| 22" | 20.66" | 21.06" |
| 23" | 22.66" | 21.06" |
| 24" | 22.66" | 23.06" |
| 36" | 34.66" | 35.06" |
| 48" | 46.66" | 47.06" |
| 60" | 58.66" | 59.06" |
| 72" | 70.66" | 71.06" |
| 84" | 82.66" | 83.06" |
| 96" | 94.66" | 95.06" |

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

# OPTI-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIM TO LEVEL | INDOOR | OUTDOOR |
|---|---|---|
| | DW-HE Tunable Applications | DW-HE Tunable Applications |
| 0.1% | QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT8<br>QT-CAB-eLED+DALI-DT8-AWN<br>QT-CAB-eLED+TW<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT8<br>QTM-eLED+DALI-DT8-AWN<br>QTM-eLED+TW<br>QZ-DMX | Q-SET-QZ-DMX<br>QOM-eLED+DALI-DT6<br>QOM-eLED+DALI-DT6-PS<br>QOM-eLED+DALI-DT8<br>QOM-eLED+DALI-DT8-PS<br>QOM-eLED+TW<br>QZ-DMX |
| 1% | QZ-DALI-DT8 | Q-SET+QZ-DALI-DT8<br>QZ-DALI-DT8 |
| 10% | Non-Dim Power Supply with TW App Dongle | |

| DIMMING PROTOCOL | INDOOR | OUTDOOR |
|---|---|---|
| | DW-HE Tunable Applications | DW-HE Tunable Applications |
| 0-10V | QT-CAB-eLED+TW<br>QTM-eLED+TW | QOM-eLED+TW |
| Lutron Athena | QT-CAB-eLED+DALI-DT8-AWN<br>QTM-eLED+DALI-DT8-AWN | |
| DMX<br>LED wattage must be doubled for DW-HE products | QZ-DMX | Q-SET-QZ-DMX<br>QZ-DMX |
| DALI-2: DT6<br>LED wattage must be doubled for DW-HE products except for AWN | QT-CAB-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6 | QOM-eLED+DALI-DT6 |
| DALI-2: DT8<br>LED wattage must be doubled for DW-HE products except for AWN | QT-CAB-eLED+DALI-DT8<br>QT-CAB-eLED+DALI-DT8-AWN<br>QTM-eLED+DALI-DT8<br>QTM-eLED+DALI-DT8-AWN<br>QZ-DALI-DT8 | Q-SET+QZ-DALI-DT8<br>QOM-eLED+DALI-DT8<br>QZ-DALI-DT8 |
| SCENE App Dimmed | Non-Dim Power Supply with TW App Dongle | |

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# OPTI-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed


## COMPATIBLE MOUNTING ACCESSORIES

**HINGE - HMB-M**




Adjustable mounting bracket - Medium

**HINGE - HMB-L**




Adjustable mounting bracket - Large

**HINGE - HMB-XL**




Adjustable mounting bracket - XLarge

**Q-PIVOT**





Small mounting accessory

**Q-ANGLE**




Adjustable mounting accessory

**QUOVA-STANDARD**



QUOVA Knife Edge

**NJ-LARGE**



J Mounting Bracket

**NU-LARGE**




U Mounting Bracket

**SD-J-LARGE**



J Mounting Bracket

**BL-LARGE**



Backwards L Mounting Bracket

**NL-LARGE**




L Mounting Bracket

**SD-L-LARGE**



L Mounting Bracket


**MMA-02**




Magnet Mount Accessory of MG-02

## COMPATIBLE WIRING ACCESSORIES

**Q-mini-J5**




UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

## COMPATIBLE CONTROL ACCESSORIES

**SCENE APP DONGLE**




Wi-Fi or Bluetooth Connectivity

## COMPATIBLE APPS

**NFC APP**

Q-NFC

Read and write DMX addresses and adjust voltage

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting