

OPTI-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed





- Choose from 9 lens options: 40°, 60°, 70°, 90°, 110°, 155°, 180°, Asymmetric, & Forward Throw
- Delivers smooth and consistent light to highlight architectural features and surfaces
- Ideal for surface-mounted or recessed installations
- Integrated metal end caps combined with an extruded aluminum housing give this fixture a polished modern look
- Q-Tran Red & Amber LED products are Florida Fish and Wildlife Conservation Commission certified, making them safe for turtles and other wildlife

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 LENS
OP2SC	5.0			

ADDITIONAL INFORMATION REQUIRED TO ORDER

6 WIRE INPUT/ OUTPUT	7 CONNECTOR/ WIRE IN	8 CONNECTOR/ WIRE OUT	9 WIRE COLOR	10 WIRE TYPE	11 MOUNTING	12 FINISH	13 LENGTH (IN)	14 EXACT/ OPTIMAL

Sample Part Number: **OP2SC-5.0-GR-DRY-155D-P1-CON6-CON6-WH-CL2-CC-WH-48"-E**

1 PRODUCT

OP2SC

See following pages for compatible power supplies.

2 WATTS/FT

5.0	5.0W/ft

3 CCT

AB	Amber
BL	Blue
GR	Green
RD	Red

4 RATED

DRY	IP20
DMP	IP54

5 LENS

40D	Optical 40°
60D	Optical 60°
70D	Optical 70°
90D	Optical 90°
110D	Optical 110°
155D	Optical 155°
180D	Optical 180°
ASYM	Asymmetric
FT	Forward Throw

40D, 60D, 70D, 90D, 110D, 155D, 180D, and ASYM are offered in 44.9" lengths.
For representation of LED visibility, see Diode Visibility section on following pages.
For beam angles, see Photometric Performance section on following pages

6 WIRE INPUT/OUTPUT

SINGLE (Input only)	
S1	End Feed
S2	Bottom Feed
PASS THROUGH (Input/Output)	
P1	End Feed
P2	Bottom Feed
SINGLE (Input only)	
S1A	End Feed
S1B	End Feed
S2A	Bottom Feed
S2B	Bottom Feed
PASS THROUGH (Input/Output)	
P1A	End Feed
P1B	End Feed
P2A	Bottom Feed
P2B	Bottom Feed

For continuous mounting, consider bottom feed.

7 CONNECTOR/WIRE IN

BW	Bare Wire (Standard 36")
CON6	Connector 6"
CON24	Connector 24"

BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

8 CONNECTOR/WIRE OUT

CLS	Closed End (No feed)
BW	Bare Wire (Standard 36")
CON6	Connector 6"
CON24	Connector 24"

BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9 WIRE COLOR

WH	White
BK	Black

10 WIRE TYPE

CL2	Class 2
CL2P	Plenum Rated

CL2P only available with bare wire leads (BW)

11 MOUNTING

CC	Concealed Clip
MG	Magnet

12 FINISH

ST	Satin
BK	Black
WH	White
CU	Custom

Custom finishes have longer lead times. Non-RAL 9003 whites custom.

13 LENGTH (IN)

Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".

14 EXACT/OPTIMAL

O	Optimal Illumination
E	Exact Specified Length

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-11-11-26

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance | Florida Fish and Wildlife Conservation Commission (FWC) rated Strips: DRY rated, Red and Amber


OPTI-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed


1 PRODUCT - DIMENSIONS




Profile




Profile with concealed clip




Profile with magnet clip




Profile with magnet mount clip and magnet mount accessory




Profile with 40D lens




Profile with 60D lens




Profile with 70D lens




Profile with 90D lens




Profile with 110D lens




Profile with 155D lens



Profile with 180D lens



Profile with asymmetric lens



Profile with forward throw lens

2 DELIVERED LUMENS

[Calculated L70 = 50000 hrs]
Tested with OP2SC-5.0-**-DRY


	Red		Green		Blue		Amber	
	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength
40D	114	634	473	516	121	465	84	596
60D	100	635	431	515	102	466	80	595
70D	105	635	447	516	108	466	81	595
90D	103	635	443	516	105	466	80	595
110D	105	634	438	516	111	466	79	596
155D	108	634	437	516	112	466	79	595
180D	103	635	433	516	111	465	80	595
ASYM	104	635	445	516	106	466	81	595
FT	112	631	390	516	97	465	75	596

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

OPTI-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

5 DIODE VISIBILITY



Optical 40°

Optical 60°

Optical 70°

Optical 90°

Optical 110°

Optical 155°

Optical 180°

Asymmetric

Forward Throw


TEMPERATURE RATINGS

		5.0 W/FT	
		Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	125°F
DMP	Ambient Operating Temp - Surface	-4°F	125°F


PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.


5W/ft | Green Optical 40°




5W/ft | Green Optical 60°




5W/ft | Green Optical 70°




5W/ft | Green Optical 90°




5W/ft | Green Optical 110°




5W/ft | Green Optical 155°




5W/ft | Green Optical 180°



5W/ft | Green Asymmetric



5W/ft | Green Forward Throw




© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

OPTI-OPTICS (02) STATIC COLOR


24VDC Linear Fixtures - Surface & Recessed

6 WIRE INPUT/OUTPUT


SINGLE (Input only)




PASS THROUGH (Input/Output)




ASYMMETRIC ONLY SINGLE (Input only)

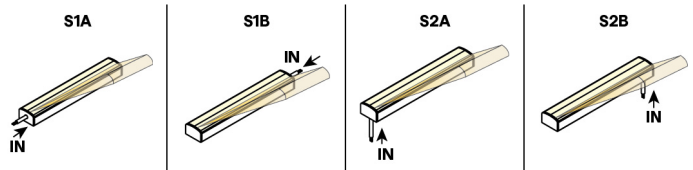


ASYMMETRIC ONLY PASS THROUGH (Input/Output)

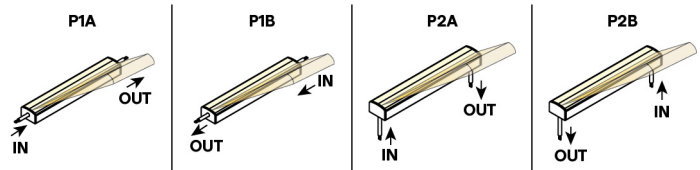


CONFIGURATION OPTIONS




Single End Feed




Non-Continuous End Feed




Non-Continuous Corner Feed




Continuous Bottom Feed




Single End Feed




Single End Feed




Single End Feed




Non-Continuous End Feed




Non-Continuous End Feed




Non-Continuous Corner Feed




Non-Continuous Corner Feed



Continuous Bottom Feed



Continuous Bottom Feed



Single End Feed


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

OPTI-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

7/8 CONNECTOR/WIRE – IN/OUT

BW




Bare Wire 36"
22 AWG

CON6/CON24



6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

9 WIRE COLOR




White

Black

11 MOUNTING

CC
(CC-01)



Concealed Clip

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'

To order separately use CC-01 (sold in pairs)

Each clips comes with a #4 x 5/8" Flat Head screw.

MG




Magnet Clip

One MG provided per foot

To order separately use MG-02

MMA-02




Magnet Mount
Accessory for MG-02

Sold separately, to order use MMA-02

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface

12 FINISH



Satin


Black

White

Custom finishes have longer lead times. Non-RAL 9003 whites custom.

14 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

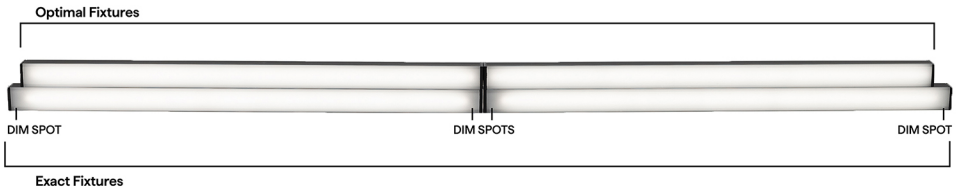

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-11-11-26


OPTI-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed



SC DRY DMP LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 – 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture  End Feed
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S1A/B & S2 & S2A/B  End Feed / Bottom Feed	P1 & P1A/B & P2 & P2A/B  End Feed / Bottom Feed
12"	10.41"	10.66"
13"	12.41"	12.66"
14"	12.41"	12.66"
15"	14.41"	14.66"
16"	14.41"	14.66"
17"	16.41"	16.66"
18"	16.41"	16.66"
19"	18.41"	18.66"
20"	18.41"	18.66"
21"	20.41"	20.66"
22"	20.41"	20.66"
23"	22.41"	22.66"
24"	22.41"	22.66"
36"	34.41"	34.66"
48"	46.41"	46.66"
60"	58.41"	58.66"
72"	70.41"	70.66"
84"	82.41"	82.66"
96"	94.41"	94.66"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	SC
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	Q-DIM QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

OPTI-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR
	SC
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)
DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle


COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M



Adjustable mounting bracket - Medium

HINGE - HMB-L



Adjustable mounting bracket - Large

HINGE - HMB-XL



Adjustable mounting bracket - XLarge

Q-PIVOT




Small mounting accessory

Q-ANGLE




Adjustable mounting accessory

QUOVA-STANDARD



QUOVA Knife Edge

NJ-LARGE



J Mounting Bracket

NU-LARGE




U Mounting Bracket

SD-J-LARGE




J Mounting Bracket

BL-LARGE



Backwards L Mounting Bracket

NL-LARGE




L Mounting Bracket

SD-L-LARGE



L Mounting Bracket

MMA-02



Magnet Mount Accessory of MG-02


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

OPTI-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed


COMPATIBLE WIRING ACCESSORIES

Q-mini-J



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

CON120-EXT



10ft Con cable extender
DRY/DMP/WET

CON FOUR-FER



Splits lead from one to four LED Con connectors
DRY/DMP/WET

CON M - BARREL F



Male con to barrel cable adaptor
DRY/DMP

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting