




Q-CAP LUME-01 STATIC WHITE

24VDC Flexible Fixtures



- Flexible encapsulated fixture
- Three-sided illumination
- Up/down bend
- 6" bend radius
- Interior and exterior rated (not including FC)
- Three different mounting options
- Do not cut Non-Field Cuttable Q-CAP flexible fixtures

ORDERING PROCESS

A Specify Non-Field Cuttable Q-CAP

B (Optional) Specify field cuttable 4' piece - used to adjust total run length in the field (dry applications only)

A. NON-FIELD CUTTABLE Q-CAP

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
PRODUCT	MOUNTING	RATED	CCT	WATTAGE	LENS	WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	END CAPS	LENGTH (IN)	EXACT/OPTIMAL
					ENC/TL				TL		

Sample Part Number: **LUME-01-SW-MC-DRY-30-5.0-ENC/TL-P1-BW-BW-N/A-48"-E**

A1

PRODUCT

LUME-01-SW

LUME-01-SW-USA

Select USA option for BA, BAA and BABA projects.

See last page for compatible power supplies.

A2

MOUNTING

MC

PPS-LP-CL-2

PPS-LP-CL-96

WSC

Magnetic Clip

Clear PVC Clip

Clear PVC Channel

White Snug Clip

White snug clip only for indirect cove use, not intended for hanging fixtures upside down.

A3

RATED

DRY

WET

IP20

IP67

A4

CCT

24

27

30

35

40

2400K

2700K

3000K

3500K

4000K

A5

WATTAGE

1.5

3.0

5.0

1.5HE

3.0HE

6.0HE

1.5W-SO

3.0W-HO

5.0W-VHO

1.5WHE-SO

3.0WHE-HO

6.0WHE-VHO

SO: Standard Output

HO: High Output

VHO: Very High Output

A6

LENS

ENC/TL

Encapsulated in Translucent

For representation of LED visibility, see Diode Visibility section on following pages

A7

WIRE INPUT/OUTPUT

S1

Single 1 (Input only) - End Feed

P1

Pass Through 1 (Input/Output) - End Feed

A8

CONNECTOR/WIRE IN

BW

BRL

CON6

CON24

Bare Wire (Standard 24")

Barrel

Connector 6"

Connector 24"

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

BW

BRL

CON6

CON24

Bare Wire (Standard 24")

Barrel

Connector 6"

Connector 24"

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

A9

CONNECTOR/WIRE OUT

N/A

Closed End (No feed)

BW

BRL

CON6

CON24

Bare Wire (Standard 24")

Barrel

Connector 6"

Connector 24"

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

A10

END CAPS

TL

Translucent

N/A

Not Applicable

A11

LENGTH (IN)

Minimum length is 12", maximum length is 191" not including end caps. Contact us for lengths under 12".

SW: Available in 1" increments.

SW-HE: Available in 2" increments.

A12

EXACT/OPTIMAL

O

E

Optimal Illumination

Exact Specified Length

Exact fixtures are the exact length specified +0 – 1/8".

Optimal fixtures' length is rounded down with illumination end to end.

See Exact/Optimal Fixture Length charts.

Up/Down Bend | Data subject to change, all data has +/- 5% tolerance | Only FC fixtures are Field-Cuttable per installation instructions | Field Cuttable is not returnable or refundable after it has been cut



Q-CAP LUME-01 STATIC WHITE

24VDC Flexible Fixtures

B. FIELD CUTTABLE Q-CAP

B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12
PRODUCT	MOUNTING	RATED	CCT	WATTAGE	LENS	WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	END CAPS	LENGTH (IN)	EXACT/ OPTIMAL
LUME-01-FC-SW		DRY			ENC/TL	S1		N/A	TL	48"	N/A

Sample Part Number: LUME-01-SW-MC-DRY-30-5.0-ENC/TL-P1-BW-BW-N/A-48"-E

B1

PRODUCT

LUME-01-FC-SW

See last page for compatible power supplies.

B2

MOUNTING

MC

PPS-LP-CL-2

PPS-LP-CL-96

WSC

Magnetic Clip

Clear PVC Clip

Clear PVC Channel

White Snug Clip

White snug clip only for indirect cove use, not intended for hanging fixtures upside down.

B3

RATED

DRY IP20

B4

CCT

24

27

30

35

40

2400K

2700K

3000K

3500K

4000K

B5

WATTAGE

1.5

3.0

5.0

1.5HE

3.0HE

6.0HE

1.5W-SO

3.0W-HO

5.0W-VHO

1.5WHE-SO

3.0WHE-HO

6.0WHE-VHO

SO: Standard Output
HO: High Output
VHO: Very High Output

B6

LENS

ENC/TL Encapsulated in Translucent

For representation of LED visibility, see Diode Visibility section on following pages

B7

WIRE INPUT/OUTPUT

S1

Single 1 (Input only) - End Feed

B8

CONNECTOR/WIRE IN

BW

BRL

CON6

CON24

Bare Wire (Standard 24")

Barrel

Connector 6"

Connector 24"

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

B9

CONNECTOR/WIRE OUT

N/A

Closed End (No feed)

B10

END CAPS

TL

Translucent

B11

LENGTH (IN)

48"

Nominal

Starting Run length is 48.475" for S1
Each cut point subtracts from the Starting Run Length
1.5, 3.0, & 5.0 have a 1" cut point
1.5HE, 3.0HE, & 6.0HE have a 2" cut point
S1 can be cut down to as little as 1.475" for SW & 2.475" SW-HE

B12

EXACT/OPTIMAL

N/A


Single ▶



Q-CAP LUME-01 STATIC WHITE

24VDC Flexible Fixtures


1 PRODUCT - DIMENSIONS



Profile
(Standard)


BEND RADIUS

Up/Down Bend




6" bending radius

FLEXIBILITY

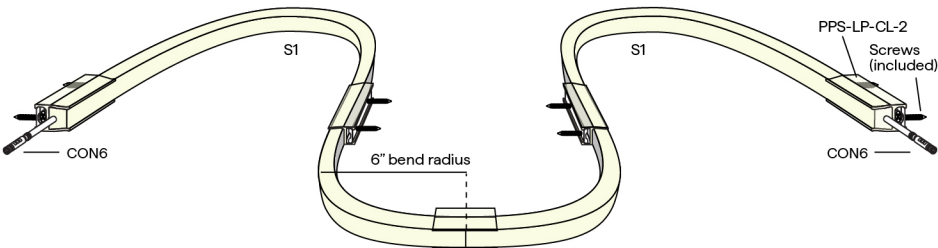

2 MOUNTING

WSC




White Snug Clip
Indirect uplight

To order separately use WSC

Each clip comes with a #6x5/8" flat screw

MC




Magnetic Clip
Cove use only

To order separately use MC

Each clip comes with a #6x5/8" flat screw


PPS-LP-CL-2



Low profile PC Mounting
Clip - Clear finish

To order separately use LUME-PPS-LP-CL-2

PPS-LP-CL-96



Low profile PC channel
96" straight linear run
Clear finish

To order separately use LUME-PPS-LP-CL-96

Each clip comes with a #8" flat screw

4 / 5 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with LUME-01-SW-WSC-DRY

CCT	1.5W/FT		1.5HE W/FT		3.0W/FT		3.0HE W/FT		5.0W/FT		6.0HE W/FT	
	ENC/TL		ENC/TL		ENC/TL		ENC/TL		ENC/TL		ENC/TL	
	LM	CRI	LM	CRI	LM	CRI	LM	CRI	LM	CRI	LM	CRI
2400K	74	92	77	93	137	92	164	93	232	92	378	93
2700K	66	97	68	97	132	97	186	97	229	98	369	97
3000K	73	95	84	95	142	95	180	95	239	95	387	95
3500K	82	98	82	97	155	98	178	97	225	98	394	97
4000K	65	97	79	97	130	97	170	97	229	97	397	97



Q-CAP LUME-01 STATIC WHITE

24VDC Flexible Fixtures

TEMPERATURE RATINGS


	1.5 W/FT		1.5 HE W/FT		3.0 W/FT		3.0 HE W/FT		5.0 W/FT		6.0 HE W/FT	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	130°F	-4°F	140°F	-4°F	125°F	-4°F	125°F	-4°F	105°F	-4°F	95°F
Storage Temp	-4°F	140°F	-4°F	140°F	-4°F	140°F	-4°F	140°F	-4°F	140°F	-4°F	140°F
Installation Temp	50°F	100°F	50°F	100°F	50°F	100°F	50°F	100°F	50°F	100°F	50°F	100°F

BUG RATING


WATTAGE	B	U	G
1.5 (ALL CCTs), 1.5HE (ALL CCTs)	B0	U1	G0
3.0 (ALL CCTs), 5.0 (ALL CCTs), 3.0HE (ALL CCTs)	B0	U2	G0
6.0HE (ALL CCTs)	B0	U2	G1

7 WIRE INPUT/OUTPUT


SINGLE (Input only)



PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP



CONFIGURATION OPTIONS

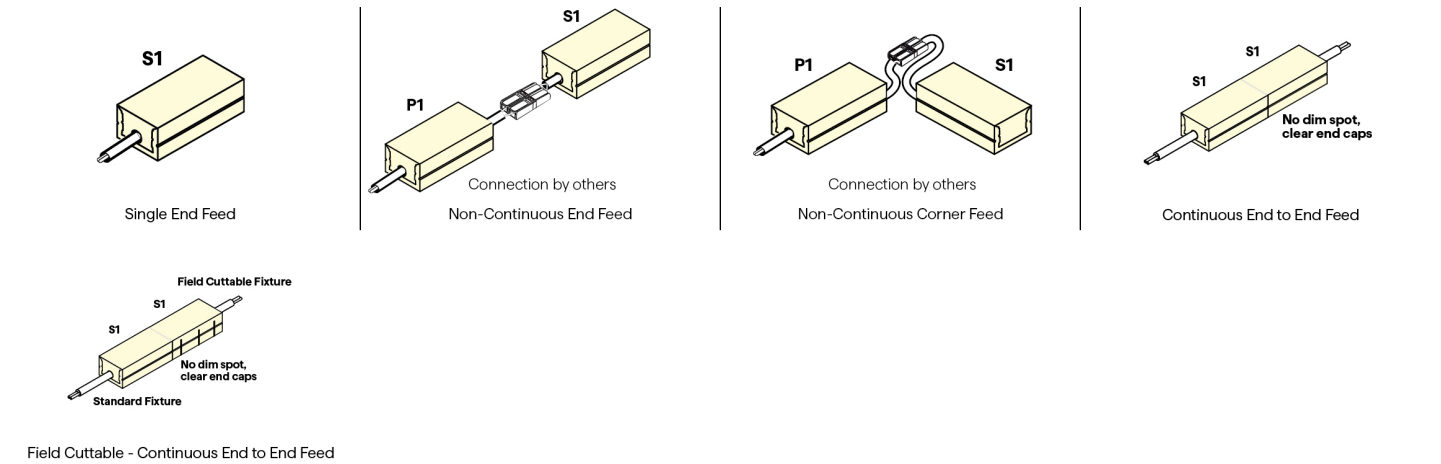





Q-CAP LUME-01 STATIC WHITE

24VDC Flexible Fixtures

FIELD CUTTABLE MARKING

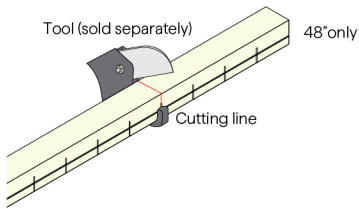


Field cuttable fixtures are sold in 4' increments and go at the end of a run, allowing for easy field adjustment



Note: Only FC fixtures are field cuttable — Do not attempt to cut non FC fixtures. Cut only on the marked cut lines. Only cut from non-feed end. Do not attempt to cut while power is on.


8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire Out, and WH for End Caps

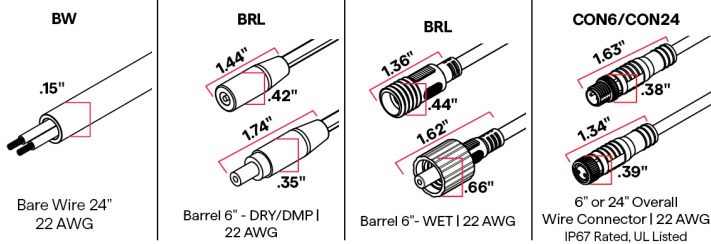

10 END CAPS (NO FEED)


TL




Translucent endcaps
.0" added at end
.00" dim spot

11 LENGTH - WIRING DETAIL

1.5W, 3.0W, 5.0W | Available in 1" increments 12"-191"



1.5HEW, 3.0HEW, 6.0HEW | Available in 2" increments 12"-191"




12 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

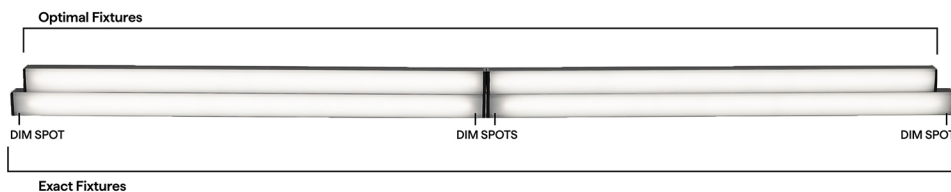



Q-CAP LUME-01 STATIC WHITE

24VDC Flexible Fixtures



SW LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

OPTIMAL LENGTH

Requested Nominal Length	S1	P1
		
12"	11.45"	11.7"
13"	12.45"	12.7"
14"	13.45"	13.7"
15"	14.45"	14.7"
16"	15.45"	15.7"
17"	16.45"	16.7"
18"	17.45"	17.7"
19"	18.45"	18.7"
20"	19.45"	19.7"
21"	20.45"	20.7"
22"	21.45"	21.7"
23"	22.45"	22.7"
24"	23.45"	23.7"
36"	35.45"	35.7"
48"	47.45"	47.7"
60"	59.45"	59.7"
72"	71.45"	71.7"
84"	83.45"	83.7"
96"	95.45"	95.7"



SW-HE LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1	P1
		
12"	10.45"	10.7"
13"	12.45"	12.7"
14"	12.45"	12.7"
15"	14.45"	14.7"
16"	14.45"	14.7"
17"	16.45"	16.7"
18"	16.45"	16.7"
19"	18.45"	18.7"
20"	18.45"	18.7"
21"	20.45"	20.7"
22"	20.45"	20.7"
23"	22.45"	22.7"
24"	22.45"	22.7"
36"	34.45"	34.7"
48"	46.45"	46.7"
60"	58.45"	58.7"
72"	70.45"	70.7"
84"	82.45"	82.7"
96"	94.45"	94.7"



Q-CAP LUME-01 STATIC WHITE

24VDC Flexible Fixtures

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED	

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN		
ECO System	QTM-eLED(E)	QTM-eLED(E)		
DMX	QZ-DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle		




Q-CAP LUME-01 STATIC WHITE

24VDC Flexible Fixtures


COMPATIBLE MOUNTING ACCESSORIES

Q-ANGLE









Adjustable mounting accessory

iQ-QCAP-UNV-CUTTER



QTL recommended FC Cutter

COMPATIBLE WIRING ACCESSORIES

<p>Q-mini-J</p>  <p>UL Listed miniature junction box, DRY/DMP (WET rated with silicone)</p>	<p>Q-mini-J5</p>  <p>UL Listed miniature junction box, DRY/DMP (WET rated with silicone)</p>	<p>BARREL-EXT</p>  <p>8ft barrel cable extender DRY ONLY</p>	<p>BARREL FOUR-FER</p>  <p>Splits lead from one to four LED Barrel connector fixtures, DRY/DMP</p>	<p>CON120-EXT</p>  <p>10ft Con cable extender DRY/DMP/WET</p>	<p>CON FOUR-FER</p>  <p>Splits lead from one to four LED Con connectors DRY/DMP/WET</p>
---	--	--	--	---	---

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage