




# Q-CAP ANYBEND™ FOR WARM DIM APPLICATIONS

## 24VDC Flexible Fixtures



- Flexible encapsulated fixture
- Both up/down bend and side bend
- Interior and exterior rated (not including FC)
- Four different mounting options
- Utilize clear endcaps for continuous runs
- 60% smaller than QTL's KURV fixture
- When using DALI and DMX power supplies, LED wattage must be doubled
- Do not cut Non-Field Cuttable Q-CAP flexible fixtures

### ORDERING PROCESS

**A** Specify Non-Field Cuttable Q-CAP

**B** (Optional) Specify field cuttable 4' piece - used to adjust total run length in the field (dry applications only)

### A. NON-FIELD CUTTABLE Q-CAP

#### INFORMATION REQUIRED FOR LIGHTING SCHEDULE

A1	A2	A3	A4	A5	A6
PRODUCT	MOUNTING	RATED	CCT	WATTAGE	LENS
				2.0	

#### ADDITIONAL INFORMATION REQUIRED TO ORDER

A7	A8	A9	A10	A11	A12
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	END CAPS	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **ANBD-DW-PPS-2-DRY-24/30-2.0-ENC-TL-P1A-BW-BW-N/A-48"-E**

<b>A1</b> <b>PRODUCT</b> <b>ANBD-DW</b> <b>ANBD-DW-USA</b>  Select USA option for BA, BAA and BABA projects.  LED engine is built with 3 wires requiring 0-10v, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See last page for compatible power supplies.	<b>A2</b> <b>MOUNTING</b> <b>PPS-2</b> PVC Clip <b>PPS-96</b> PVC Channel <b>PPS-LP-2</b> PVC Low Profile Clip <b>PPS-LP-96</b> PVC Low Profile Channel <b>WSC</b> White Snug Clip <b>BN-SB-SST-16'</b> 16' BENDIT Side Stainless Steel Channel <b>BN-SB-SST-32'</b> 32' BENDIT Side Stainless Steel Channel <b>BN-SB-WH-16'</b> 16' BENDIT Side White Stainless Channel <b>BN-SB-WH-32'</b> 32' BENDIT Side White Stainless Channel <b>BN-UD-SST-16'</b> 16' BENDIT Up/Down Stainless Steel Channel <b>BN-UD-SST-32'</b> 32' BENDIT Up/Down Stainless Steel Channel <b>BN-UD-WH-16'</b> 16' BENDIT Up/Down White Stainless Channel <b>BN-UD-WH-32'</b> 32' BENDIT Up/Down White Stainless Channel  White snug clip only for indirect cove use, not intended for hanging fixtures upside down.	<b>A3</b> <b>RATED</b> <b>DRY</b> IP20 <b>WET</b> IP67	<b>A4</b> <b>CCT</b> <b>24/30</b> 2400K/3000K <b>27/40</b> 2700K/4000K	<b>A5</b> <b>WATTAGE</b> <b>2.0</b> 2.0W-SO SO: Standard Output
<b>A6</b> <b>LENS</b> <b>ENC/CL</b> Encapsulated in Clear <b>ENC/TL</b> Encapsulated in Translucent  For representation of LED visibility, see Diode Visibility section on following pages	<b>A7</b> <b>WIRE INPUT/OUTPUT</b> <b>SINGLE (Input only)</b> <b>S1A</b> End Feed <b>S1B</b> End Feed  <b>PASS THROUGH (Input/Output)</b> <b>P1A</b> End Feed <b>P1B</b> End Feed	<b>A8</b> <b>CONNECTOR/WIRE IN</b> <b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)  <b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>A9</b> <b>CONNECTOR/WIRE OUT</b> <b>N/A</b> Closed End (No feed)  <b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	
<b>A10</b> <b>END CAPS</b> <b>CL</b> Clear <b>WH</b> White  <b>N/A</b> Not Applicable	<b>A11</b> <b>LENGTH (IN)</b> Minimum length is 12", maximum length is 191" not including end caps. Contact us for lengths under 12". Available in 2" increments.	<b>A12</b> <b>EXACT/OPTIMAL</b> <b>O</b> Optimal Illumination <b>E</b> Exact Specified Length  Exact fixtures are the exact length specified +0 - 1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.		

Warranty only valid with QTL power supplies | 5 year warranty | Up/Down, Side Bend | Data subject to change, all data has +/- 5% tolerance | Only FC fixtures are Field-Cuttable per installation instructions | Field Cuttable is not returnable or refundable after it has been cut



# Q-CAP ANYBEND™ FOR WARM DIM APPLICATIONS

24VDC Flexible Fixtures

## B. FIELD CUTTABLE Q-CAP

### INFORMATION REQUIRED FOR LIGHTING SCHEDULE

B1	B2	B3	B4	B5	B6
PRODUCT	MOUNTING	RATED	CCT	WATTAGE	LENS
ANBD-FC-DW		DRY		2.0	

### ADDITIONAL INFORMATION REQUIRED TO ORDER

B7	B8	B9	B10	B11	B12
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	END CAPS	LENGTH (IN)	EXACT/ OPTIMAL
		N/A	CL	48"	N/A

Sample Part Number: **ANBD-DW-PPS-2-DRY-24/30-2.0-ENC/TL-P1A-BW-BW-N/A-48"-E**

**B1**

### PRODUCT

**ANBD-FC-DW**

LED engine is built with 3 wires requiring 0-10v, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See last page for compatible power supplies.

**B2**

### MOUNTING

<b>PPS-2</b>	PVC Clip
<b>PPS-96</b>	PVC Channel
<b>PPS-LP-2</b>	PVC Low Profile Clip
<b>PPS-LP-96</b>	PVC Low Profile Channel
<b>WSC</b>	White Snug Clip
<b>BN-SB-SST-16'</b>	16' BENDIT Side Stainless Steel Channel
<b>BN-SB-SST-32'</b>	32' BENDIT Side Stainless Steel Channel
<b>BN-SB-WH-16'</b>	16' BENDIT Side White Stainless Channel
<b>BN-SB-WH-32'</b>	32' BENDIT Side White Stainless Channel
<b>BN-UD-SST-16'</b>	16' BENDIT Up/Down Stainless Steel Channel
<b>BN-UD-SST-32'</b>	32' BENDIT Up/Down Stainless Steel Channel
<b>BN-UD-WH-16'</b>	16' BENDIT Up/Down White Stainless Channel
<b>BN-UD-WH-32'</b>	32' BENDIT Up/Down White Stainless Channel

White snug clip only for indirect cove use, not intended for hanging fixtures upside down.

**B3**

### RATED

**DRY** IP20

**B4**

### CCT

<b>24/30</b>	2400K/3000K
<b>27/40</b>	2700K/4000K

**B5**

### WATTAGE

<b>2.0</b>	2.0W-SO
------------	---------

SO: Standard Output

**B6**

### LENS

<b>ENC/CL</b>	Encapsulated in Clear
<b>ENC/TL</b>	Encapsulated in Translucent

For representation of LED visibility, see Diode Visibility section on following pages

**B7**

### WIRE INPUT/OUTPUT

**SINGLE (Input only)**

<b>S1A</b>	End Feed
<b>S1B</b>	End Feed

**B8**

### CONNECTOR/WIRE IN

<b>BW</b>	Bare Wire (Standard 24")
<b>CON6</b>	Connector 6"
<b>CON24</b>	Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

**B9**

### CONNECTOR/WIRE OUT

<b>N/A</b>	Closed End (No feed)
------------	----------------------

**B10**

### END CAPS

<b>CL</b>	Clear
-----------	-------

Due to cutting, white endcaps are not available.

**B11**

### LENGTH (IN)

<b>48"</b>	Nominal
------------	---------

Starting Run length is 48.475" for S1A & S1B  
Each cut point subtracts from the Starting Run Length  
2.0 has a 2" cut point  
S1A, S1B can be cut down to as little as 2.475"

**B12**

### EXACT/OPTIMAL


<b>N/A</b>
------------



# Q-CAP ANYBEND™ FOR WARM DIM APPLICATIONS

24VDC Flexible Fixtures


## 1 PRODUCT - DIMENSIONS



Profile  
(Standard)


### BEND RADIUS

Up/Down Bend




9" bending radius

Side Bend




9" bending radius

### FLEXIBILITY

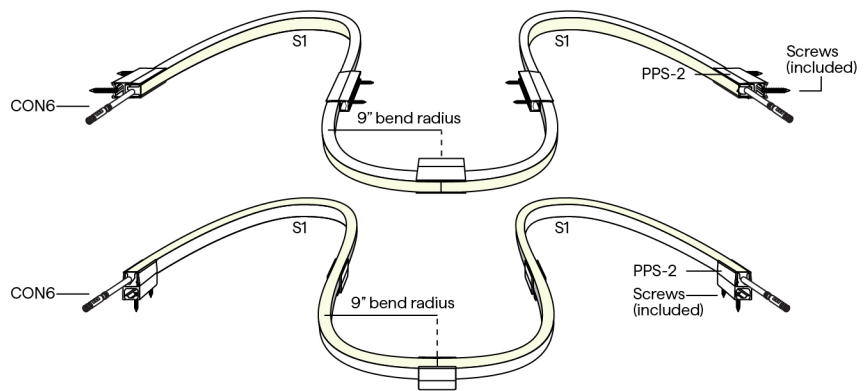

## 2 MOUNTING


WSC



White Snug Clip  
Indirect uplight

To order separately use WSC-02  
Each clip comes with a #4x5/8" flat screw


PPS-2



PVC Mounting Clip

To order separately use MICRO5-PPS2

PPS-96




96" straight linear run

To order separately use MICRO5-PPS-96

Each clip comes with a #6" flat screw


PPS-LP-2



Low profile PVC  
Mounting Clip

To order separately use MICRO5-PPS-LP-2

PPS-LP-96



Low profile PVC channel  
96" straight linear run

To order separately use MICRO5-PPS-LP-96

Each clip comes with a #6" flat screw




# Q-CAP ANYBEND™ FOR WARM DIM APPLICATIONS

## 24VDC Flexible Fixtures

### MOUNTING CONTINUED

BN-SB




BENDIT Channel  
Horizontal Stainless Steel  
Flexible Channel

Continuous mounting solution for flexible fixtures, 16' or 32' field cuttable lengths

To order separately use either MICRO5-BN-SB-SST-16', MICRO5-BN-SB-SST-32', MICRO5-BN-SB-WH-16', or MICRO5-BN-SB-WH-32'

64 #4-40 1/2" screws provided per 16'

BN-UD



BENDIT Channel  
Vertical Stainless Steel  
Flexible Channel

Continuous mounting solution for flexible fixtures, 16' or 32' field cuttable lengths

To order separately use either MICRO5-BN-UD-SST-16', MICRO5-BN-UD-SST-32', MICRO5-BN-UD-WH-16', or MICRO5-BN-UD-WH-32'

64 #4-40 1/2" screws provided per 16'

### 4 / 5 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]  
Tested with ANBD-DW-WSC-DRY

CCT	2.0W/FT Total Load				Circuit Wattage
	ENC/CL		ENC/TL		
	LM	CRI	LM	CRI	
2400K	140	94	135	93	1.90
2700K	140	94	130	92	1.90
3000K	148	96	136	96	1.90
3500K	158	98	138	98	1.90
4000K	46	97	53	98	122

### 6 DIODE VISIBILITY



ENC/CL - Clear encapsulation

ENC/TL - Translucent encapsulation

### TEMPERATURE RATINGS

	DW 2.0 W/FT		DW 4.0 W/FT	
	QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	135°F	-4°F	110°F
Storage Temp	-4°F	140°F	-4°F	140°F
Install Temp	50°F	100°F	50°F	100°F

### BUG RATING

WATTAGE	B	U	G
2.0 (ALL CCTs)	B0	U1	G0




# Q-CAP ANYBEND™ FOR WARM DIM APPLICATIONS


24VDC Flexible Fixtures

## 7 WIRE INPUT/OUTPUT


ASYMMETRIC ONLY SINGLE (Input only)




ASYMMETRIC ONLY PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP




## CONFIGURATION OPTIONS

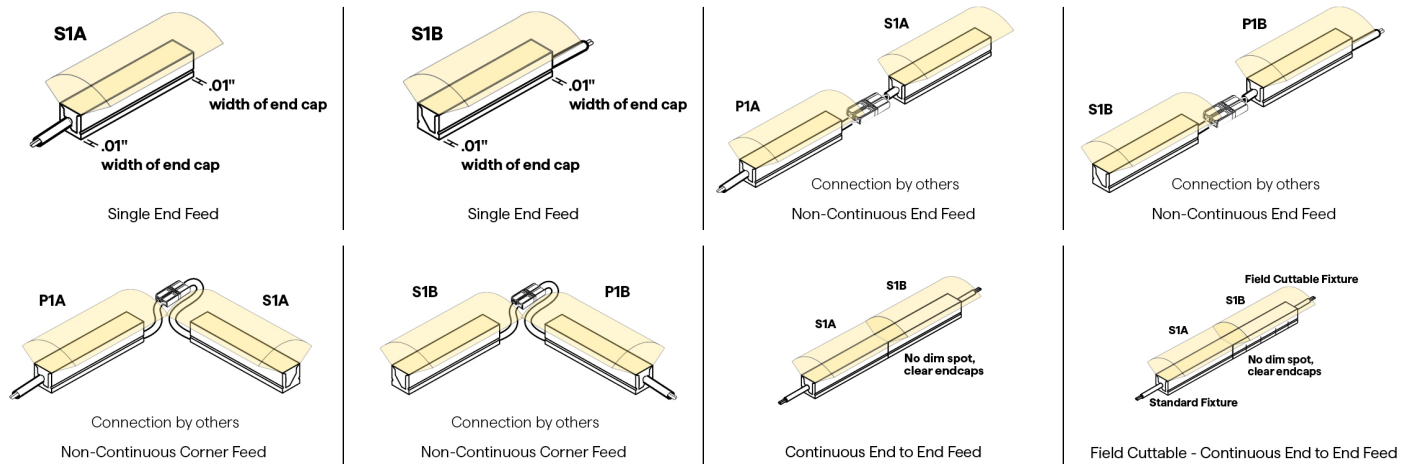

## FIELD CUTTABLE MARKING

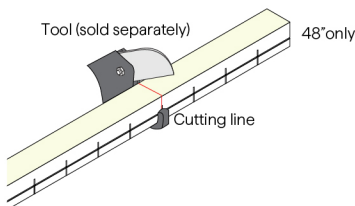


Field cuttable fixtures are sold in 4' increments and go at the end of a run, allowing for easy field adjustment



**Note:** Only FC fixtures are field cuttable — Do not attempt to cut non FC fixtures. Cut only on the marked cut lines. Only cut from non-feed end. Do not attempt to cut while power is on.

## 8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out, and WH for End Caps







# Q-CAP ANYBEND™ FOR WARM DIM APPLICATIONS

24VDC Flexible Fixtures

## 10 END CAPS (NO FEED)



## END CAPS (WITH FEED)



## 11 LENGTH - WIRING DETAIL

Available in 2" increments 12"-191"




## 12 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

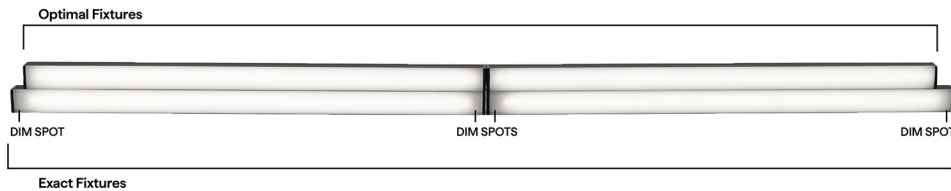

## DW LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1A/B	P1A/B
	S1 End Feed	P1 OUT End Feed
12"	10.63"	11"
13"	12.63"	13"
14"	12.63"	13"
15"	14.63"	15"
16"	14.63"	15"
17"	16.63"	17"
18"	16.63"	17"
19"	18.63"	19"
20"	18.63"	19"
21"	20.63"	21"
22"	20.63"	21"
23"	22.63"	23"
24"	22.63"	23"
36"	34.63"	35"
48"	46.63"	47"
60"	58.63"	59"
72"	70.63"	71"
84"	82.63"	83"
96"	94.63"	95"



# Q-CAP ANYBEND™ FOR WARM DIM APPLICATIONS

24VDC Flexible Fixtures






## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	MICRO 5-DW Warm Dim Applications	MICRO 5-DW Warm Dim Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DMX QZ-DW	Q-SET-QZ-DW QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+WD QZ-DMX QZ-DW
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with WD App Dongle	

DIMMING PROTOCOL	INDOOR	OUTDOOR
	MICRO 5-DW Warm Dim Applications	MICRO 5-DW Warm Dim Applications
Phase	QZ-DW	Q-SET-QZ-DW QZ-DW
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	Q-SET-QZ-DW QOM-eLED+WD QZ-DW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN	
DMX LED wattage must be doubled for DW-HE products	QZ-DMX	QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle	

## COMPATIBLE MOUNTING ACCESSORIES


NJ-MICRO	BL-MICRO	NL-MICRO	SD-L-MICRO	IQ-QCAP-UNV-CUTTER
				
J Mounting Bracket	Backwards L Mounting Bracket	L Mounting Bracket	L Mounting Bracket	QTL recommended FC Cutter



# Q-CAP ANYBEND™ FOR WARM DIM APPLICATIONS

## 24VDC Flexible Fixtures

### COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature  
junction box, DRY/DMP  
(WET rated with silicone)

### COMPATIBLE CONTROL ACCESSORIES

#### SCENE APP DONGLE



Wi-Fi or Bluetooth  
Connectivity

### COMPATIBLE APPS

#### NFC APP



Read and write  
DMX addresses and  
adjust voltage