





Q-CAP BOXA™ RGB

24VDC Flexible Fixtures



- Flexible encapsulated fixture
- Up/down bend
- 6" bend radius
- Interior and exterior rated (not including FC)
- Seven different mounting options
- Available in a seamless configuration for a continuous line of light
- Utilize clear endcaps for continuous runs
- Pair with ZALA's side bend to achieve compound curves
- standard Q-CAP flexible fixtures are not field cuttable
- IK10 impact rated

ORDERING PROCESS

- A** Specify Non-Field Cuttable Q-CAP
- B** (Optional) Specify field cuttable 4' piece - used to adjust total run length in the field (dry applications only)

A. NON-FIELD CUTTABLE Q-CAP

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

A1	A2	A3	A4	A5	A6
PRODUCT	MOUNTING	RATED	CCT	WATTAGE	LENS
BOXA-RGB			RGB	6.0	

ADDITIONAL INFORMATION REQUIRED TO ORDER

A7	A8	A9	A10	A11	A12
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	END CAPS	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **BOXA-RGB-PPS-2-DRY-RGB-6.0-ENC/CL-S1-BW-N/A-CL-48"-E**

<div>A1</div> <div>PRODUCT</div> <div>BOXA-RGB</div> <div>See last page for compatible power supplies.</div>	<div>A2</div> <div>MOUNTING</div> <div><div>RLC</div><div>MC</div><div>SGC</div><div>PPS-2</div><div>PPS-96</div><div>PPS-LP-2</div><div>PPS-LP-96</div><div>WSC</div><div>BN-UD-SST-16'</div><div>BN-UD-SST-32'</div><div>BN-UD-WH-16'</div><div>BN-UD-WH-32'</div></div> <div><div>Rigid Lock Channel</div><div>Magnetic Clip</div><div>Side Graze Channel</div><div>PVC Clip</div><div>PVC Channel</div><div>PVC Low Profile Clip</div><div>PVC Low Profile Channel</div><div>White Snug Clip</div><div>16" BENDIT Up/Down Stainless Steel Channel</div><div>32" BENDIT Up/Down Stainless Steel Channel</div><div>16" BENDIT Up/Down White Stainless Channel</div><div>32" BENDIT Up/Down White Stainless Channel</div></div> <div>White snug clip only for indirect cove use, not intended for hanging fixtures upside down.</div> <div>PPS mounting clip recommended for seamless applications</div>	<div>A3</div> <div>RATED</div> <div><div>DRY</div><div>WET</div><div>IP20</div><div>IP67</div></div>	<div>A4</div> <div>CCT</div> <div>RGB</div>	<div>A5</div> <div>WATTAGE</div> <div><div>6.0</div><div>6.0W-SO</div></div> <div>SO: Standard Output</div>
<div>A6</div> <div>LENS</div> <div><div>ENC/CL</div><div>ENC/TL</div><div>Encapsulated in Clear</div><div>Encapsulated in Translucent</div></div> <div>For representation of LED visibility, see Diode Visibility section on following pages</div>	<div>A7</div> <div>WIRE INPUT/OUTPUT</div> <div><div>SINGLE (Input only)</div><div>S1</div><div>S2</div><div>S3</div><div>S4</div><div>S5</div><div>End Feed</div><div>Bottom Feed</div><div>Left Side Feed</div><div>Right Side Feed</div><div>Seamless Feed</div></div> <div><div>PASS THROUGH (Input/Output)</div><div>P1</div><div>P2</div><div>P3</div><div>P4</div><div>P5</div><div>End Feed</div><div>Bottom Feed</div><div>Left Side Feed</div><div>Right Side Feed</div><div>Seamless Feed</div></div>	<div>A8</div> <div>CONNECTOR/WIRE IN</div> <div><div>BW</div><div>CON6</div><div>CON24</div><div>Bare Wire (Standard 24")</div><div>Connector 6"</div><div>Connector 24"</div></div> <div><div>BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div></div> <div><div>BW</div><div>CON6</div><div>CON24</div><div>Bare Wire (Standard 24")</div><div>Connector 6"</div><div>Connector 24"</div></div> <div><div>BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div></div>	<div>A9</div> <div>CONNECTOR/WIRE OUT</div> <div><div>N/A</div><div>Closed End (No feed)</div></div> <div><div>BW</div><div>CON6</div><div>CON24</div><div>Bare Wire (Standard 24")</div><div>Connector 6"</div><div>Connector 24"</div></div> <div><div>BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div></div>	
<div>A10</div> <div>END CAPS</div> <div><div>CL</div><div>WH</div><div>Clear</div><div>White</div></div> <div><div>N/A</div><div>Not Applicable</div></div>	<div>A11</div> <div>LENGTH (IN)</div> <div><div>Minimum length is 12", maximum length is 191" not including end caps. Contact us for lengths under 12". Available in 2" increments.</div></div>	<div>A12</div> <div>EXACT/OPTIMAL</div> <div><div>O</div><div>E</div><div>Optimal Illumination</div><div>Exact Specified Length</div></div> <div><div>Exact fixtures are the exact length specified +0 – 1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.</div></div>		

5 year warranty | Up/Down Bend | Data subject to change, all data has +/- 5% tolerance | Ambient or mounting surface must not be lower than -4°F or higher than 125°F | Patent # D872,931 S, D847,395 S, 10,619,828 B2 | Only FC fixtures are Field-Cuttable per installation instructions | Field Cuttable is not returnable or refundable after it has been cut



Q-CAP BOXA™ RGB

24VDC Flexible Fixtures

B. FIELD CUTTABLE Q-CAP

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

B1	B2	B3	B4	B5	B6
PRODUCT	MOUNTING	RATED	CCT	WATTAGE	LENS
BOXA-FC-RGB		DRY	RGB	6.0	

ADDITIONAL INFORMATION REQUIRED TO ORDER

B7	B8	B9	B10	B11	B12
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	END CAPS	LENGTH (IN)	EXACT/ OPTIMAL
		N/A	CL	48"	N/A

Sample Part Number: **BOXA-RGB-PPS-2-DRY-RGB-6.0-ENC/CL-S1-BW-N/A-CL-48"-E**

B1

PRODUCT

BOXA-FC-RGB

See last page for compatible power supplies.

B2

MOUNTING

RLC	Rigid Lock Channel
MC	Magnetic Clip
SGC	Side Graze Channel
PPS-2	PVC Clip
PPS-96	PVC Channel
PPS-LP-2	PVC Low Profile Clip
PPS-LP-96	PVC Low Profile Channel
WSC	White Snug Clip
BN-UD-SST-16'	16' BENDIT Up/Down Stainless Steel Channel
BN-UD-SST-32'	32' BENDIT Up/Down Stainless Steel Channel
BN-UD-WH-16'	16' BENDIT Up/Down White Stainless Channel
BN-UD-WH-32'	32' BENDIT Up/Down White Stainless Channel

White snug clip only for indirect cove use, not intended for hanging fixtures upside down.

PPS mounting clip recommended for seamless applications

B3

RATED

DRY IP20

B4

CCT

RGB

B5

WATTAGE

6.0 6.0W-SO

SO: Standard Output

B6

LENS

ENC/CL Encapsulated in Clear
ENC/TL Encapsulated in Translucent

For representation of LED visibility, see Diode Visibility section on following pages

B7

WIRE INPUT/OUTPUT

SINGLE (Input only)

S1 End Feed
S2 Bottom Feed
S3 Left Side Feed
S4 Right Side Feed
S5 Seamless Feed

B8

CONNECTOR/WIRE IN

BW Bare Wire (Standard 24")
CON6 Connector 6"
CON24 Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

B9

CONNECTOR/WIRE OUT

N/A Closed End (No feed)

B10

END CAPS

CL Clear

Due to cutting, white endcaps are not available.

B11

LENGTH (IN)

48" Nominal

Starting Run length is 48.475" for S1, S5 and 48.725" for S2, S3, S4
Each cut point subtracts from the Starting Run Length
6.0 has a 2" cut point
S2, S3, & S4 can be cut down to as little as 2.725"
S1 can be cut down to as little as 2.475"
S5 can be cut down to as little as 6.475"

B12

EXACT/OPTIMAL


N/A




Q-CAP BOXA™ RGB

24VDC Flexible Fixtures


1 PRODUCT - DIMENSIONS



Profile
(Standard)




Profile
(Seamless bare wire)



Profile
(CON6-24 barrel)


BEND RADIUS

Up/Down Bend




6" bending radius

FLEXIBILITY

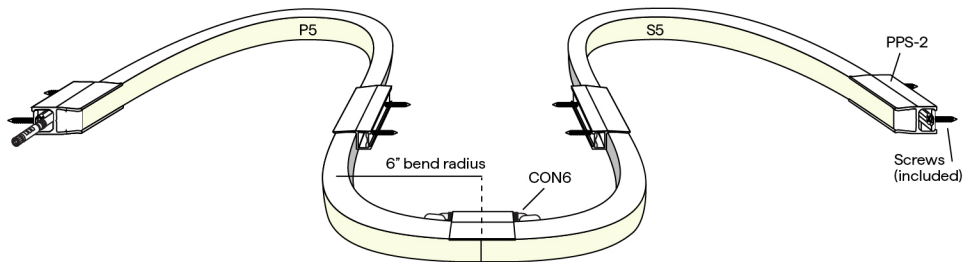

2 MOUNTING

WSC




White Snug Clip
Indirect uplight

To order separately use WSC

Each clip comes with a #6x5/8" flat screw

RLC




Rigid Lock Channel

To order separately use RLC

Each clip comes with a #6x5/8" flat screw

MC




Magnetic Clip
Cove use only

To order separately use MC

Each clip comes with a #6x5/8" flat screw

SGC




Side Graze Clip

To order separately use SGC

Each clip comes with a #6x5/8" flat screw

PPS-2



PVC Mounting Clip


To order separately use BOXA-PPS2



Q-CAP BOXA™ RGB

24VDC Flexible Fixtures


MOUNTING CONTINUED



96" straight linear run


To order separately use BOXA-PPS-96

Each clip comes with a #8" flat screw



Low profile PVC Mounting Clip


To order separately use BOXA-PPS-LP-2



Low profile PVC channel 96" straight linear run

To order separately use BOXA-PPS-LP-96

Each clip comes with a #8" flat screw



BENDIT Channel Vertical Stainless Steel Flexible Channel

Continuous mounting solution for flexible fixtures, 16' or 32' field cuttable lengths

To order separately use either STND-QCAP-BN-UD-SST-16', STND-QCAP-BN-UD-SST-32', STND-QCAP-BN-UD-WH-16', or STND-QCAP-BN-UD-WH-32'

64 #4-40 1/2" screws provided per 16'

4 / 5 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with BOXA-RGB-WSC-DRY

CCT	6.0W/FT Total Load				
	ENC/CL		ENC/TL		Circuit Wattage
	LM	Wavelength	LM	Wavelength	
Red	90	630	67	631	2.4
Green	174	522	127	522	1.9
Blue	52	470	37	470	1.7
All	294	-	216	-	6.0

6 DIODE VISIBILITY



ENC/CL - Clear encapsulation

ENC/TL - Translucent encapsulation

BUG RATING


WATTAGE	B	U	G
6.0 (ALL CCTs)	B0	U1	G0

TEMPERATURE RATINGS


	6.0 W/FT	
	Min	Max
Ambient Operating Temp - Surface	-14°F	90°F
Storage Temp	-13°F	176°F
Installation Temp	50°F	100°F

7 WIRE INPUT/OUTPUT


SINGLE (Input only)




End Feed



Bottom Feed




Side Feed - Left




Side Feed - Right


PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP




End Feed



Bottom Feed



Side Feed - Left




Side Feed - Right



Q-CAP BOXA™ RGB


24VDC Flexible Fixtures

SEAMLESS SINGLE (Input only)




Seamless Feed

SEAMLESS PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP




Seamless Feed


CONFIGURATION OPTIONS




Single End Feed




Connection by others
Non-Continuous End Feed




Connection by others
Non-Continuous Corner Feed




Continuous Bottom Feed




Continuous Side Feed - Left




Continuous Side Feed - Right




Seamless Bottom Feed



Continuous End to End Feed




Field Cuttable - Continuous End to End Feed



Field Cuttable - Seamless Bottom Feed

FIELD CUTTABLE MARKING

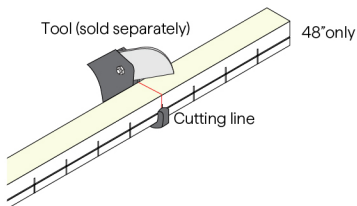

Field cuttable fixtures are sold in 4' increments and go at the end of a run, allowing for easy field adjustment



Note: Only FC fixtures are field cuttable — Do not attempt to cut non FC fixtures.
Cut only on the marked cut lines. Only cut from non-feed end. Do not attempt to cut while power is on.




Q-CAP BOXA™ RGB

24VDC Flexible Fixtures

SEAMLESS


Shown with bare wire, connectors vary




Omnidirectional wireways
S5, P5

8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out, and WH for End Caps



10 END CAPS (NO FEED)




END CAPS (WITH FEED)



11 LENGTH - WIRING DETAIL

Available in 2" increments 12"-191"




12 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

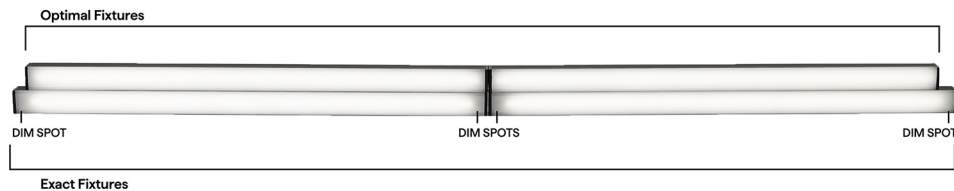



Q-CAP BOXA™ RGB

24VDC Flexible Fixtures











RGB LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture with S1 wireway
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1	S2	S2 & S3 & S4		P1	P2 & P3 & P4		S5 & P5		
	 End Feed	 Bottom Feed	 Side Feed - Left	 Side Feed - Right	 End Feed	 Bottom Feed	 Side Feed - Left	 Side Feed - Right	 Seamless Feed	 Seamless Feed
12"	10.58"		10.98"		10.95"		11.75"			10.2"
13"	12.58"		12.98"		12.95"		11.75"			12.2"
14"	12.58"		12.98"		12.95"		13.75"			12.2"
15"	14.58"		14.98"		14.95"		13.75"			14.2"
16"	14.58"		14.98"		14.95"		15.75"			14.2"
17"	16.58"		16.98"		16.95"		15.75"			16.2"
18"	16.58"		16.98"		16.95"		17.75"			16.2"
19"	18.58"		18.98"		18.95"		17.75"			18.2"
20"	18.58"		18.98"		18.95"		19.75"			18.2"
21"	20.58"		20.98"		20.95"		19.75"			20.2"
22"	20.58"		20.98"		20.95"		21.75"			20.2"
23"	22.58"		22.98"		22.95"		21.75"			22.2"
24"	22.58"		22.98"		22.95"		23.75"			22.2"
36"	34.58"		34.98"		34.95"		35.75"			34.2"
48"	46.58"		46.98"		46.95"		47.75"			46.2"
60"	58.58"		58.98"		58.95"		59.75"			58.2"
72"	70.58"		70.98"		70.95"		71.75"			70.2"
84"	82.58"		82.98"		82.95"		83.75"			82.2"
96"	94.58"		94.98"		94.95"		95.75"			94.2"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	RGB	RGB
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DMX QOM-eLED+PS-DALI-DT8 QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with RGB App Dongle	









DIMMING PROTOCOL	INDOOR	OUTDOOR
	RGB	RGB
DMX	QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8




Q-CAP BOXA™ RGB

24VDC Flexible Fixtures

COMPATIBLE MOUNTING ACCESSORIES

Q-ANGLE  Adjustable mounting accessory	NJ-LARGE  J Mounting Bracket	NU-LARGE  U Mounting Bracket	SD-J-LARGE  J Mounting Bracket	BL-LARGE  Backwards L Mounting Bracket	NL-LARGE  L Mounting Bracket	SD-L-LARGE  L Mounting Bracket	IQ-QCAP-UNV-CUTTER  QTL recommended FC Cutter
--	--	--	--	--	--	---	---

COMPATIBLE WIRING ACCESSORIES



UL Listed miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS



Read and write DMX addresses and adjust voltage