




DL-6
12V MR11 20W Halogen/2W LED Down Light

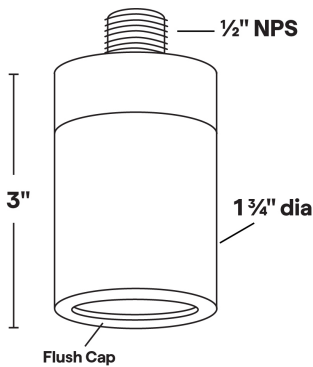

- Flush lens cap; holds up to one accessory
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 10" of 18ga. Teflon coated wire leads.
- Tempered clear glass lens.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 20W Halogen/2W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GU4 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for fixed downlighting applications. Can be utilized for pergola and other exterior installations.

DL-6 Shown in Bronze Texture Powder Coat Finish (BZT)

Dimensions: 1 3/4" dia. x 3"

1	2	3	4	5
PRODUCT	MATERIAL	MOUNTING PLATE	STEM LENGTH	FINISH
DL-6	A			

Sample Part Number: DL-6-A-1-0-BK

1	2	3	4	5
PRODUCT	MATERIAL	MOUNTING PLATE	STEM LENGTH	FINISH
DL-6	A Aluminum	1 4/0 Round Mounting Plate 2 3/0 Round Mounting Plate 3 Surface MT-11 4 Surface MT-21	0 No Stem 3 3" Stem Length 6 6" Stem Length 9 9" Stem Length 12 12" Stem Length 18 18" Stem Length	BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




DL-6

12V MR11 20W Halogen/2W LED Down Light

1

PRODUCT - DIMENSIONS

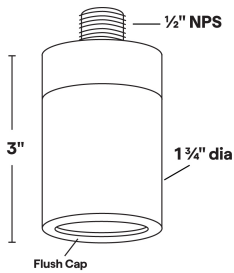

2

MATERIAL



3

MOUNTING PLATE


1/2" NPS



4

FINISH

Eight Standard TGIC Free powder coat finishes

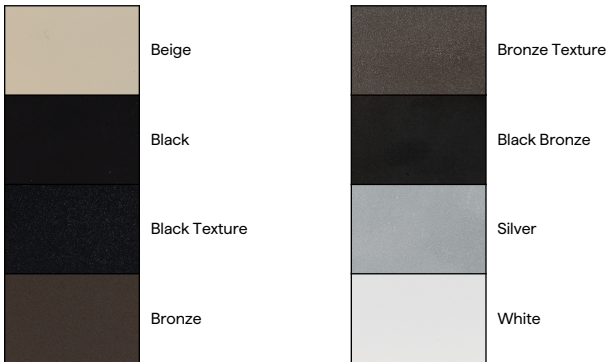











DL-6

12V MR11 20W Halogen/2W LED Down Light







ACCESSORIES - COLOR FILTERS

Holds up to one accessories Wire Filter Holder is included for each color filter to hold filter in place.

<div>BL</div> <div></div> <div>Blue Glass Filter</div> <div>To order separately use AY-2-MR11-BL</div>	<div>LB</div> <div></div> <div>Light Blue Glass Filter</div> <div>To order separately use AY-2-MR11-LB</div>	<div>PK</div> <div></div> <div>Pink Glass Filter</div> <div>To order separately use AY-2-MR11-PK</div>	<div>AM</div> <div></div> <div>Amber Glass Filter</div> <div>To order separately use AY-2-MR11-AM</div>	<div>MV</div> <div></div> <div>Mercury Vapor Glass Filter</div> <div>To order separately use AY-2-MR11-MV</div>	<div>RD</div> <div></div> <div>Red Glass Filter</div> <div>To order separately use AY-2-MR11-RD</div>	<div>GR</div> <div></div> <div>Green Glass Filter</div> <div>To order separately use AY-2-MR11-GR</div>	<div>DA</div> <div></div> <div>Dichroic Amber Glass Filter</div> <div>To order separately use AY-2-MR11-DA</div>
---	---	---	--	--	--	--	---



ACCESSORIES - LENS

Holds up to one accessories

<div>SP</div> <div></div> <div>Spread Lens</div> <div>To order separately use AY-1-MR11-1</div>	<div>LI</div> <div></div> <div>Linear Lens</div> <div>To order separately use AY-1-MR11-2</div>	<div>SO</div> <div></div> <div>Softening Lens</div> <div>To order separately use AY-1-MR11-3</div>	<div>LV</div> <div></div> <div>Louver Lens</div> <div>To order separately use AY-1-MR11-4</div>	<div>WI</div> <div></div> <div>Wire Holder</div> <div>To order separately use AY-1-MR11-5</div>	<div>FR</div> <div></div> <div>Frosted Lens</div> <div>To order separately use AY-1-MR11-6</div>
--	--	---	--	--	---

LAMPS

MR11 Halogen or LED; GU4 Bi Pin Porcelain
Maximum wattage: 20W Halogen/2W LED

<div>MR11</div> <div></div> <div>EMERY ALLEN</div> <div>1.5W</div>	<div>MR11</div> <div></div> <div>EMERY ALLEN</div> <div>1.5W</div>
---	---

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS